





USER DIMENSIONS:
SPINE TO KNEES: 590
SEAT TO HEAD: 790

3878

2691

2793

Section	Support	Tube	PK/IC	Base	Height
A	1	ADJ2		ADJ	360
A	2	D		6	595
B	3	D		6	590
C	4	C	Y	6	499
C	5	C		6	523
D	6	C		6	504

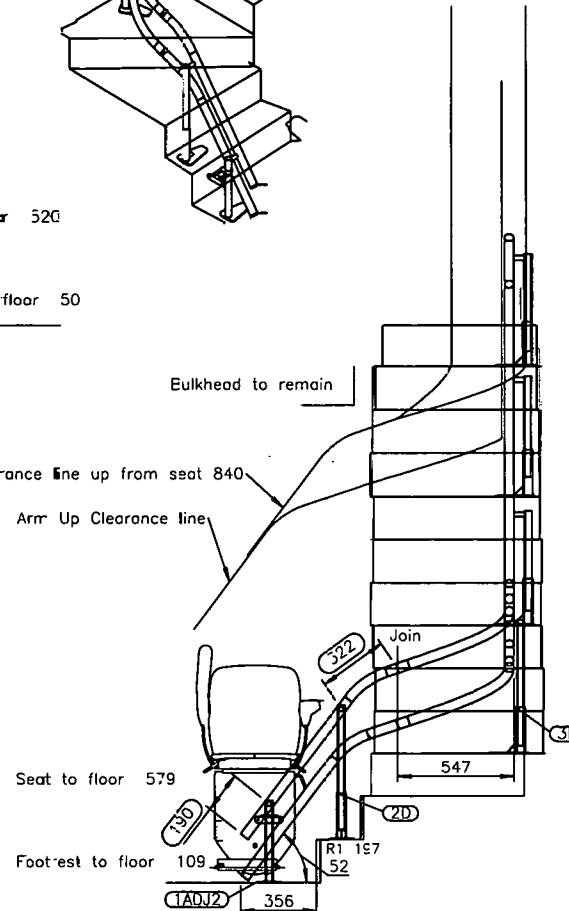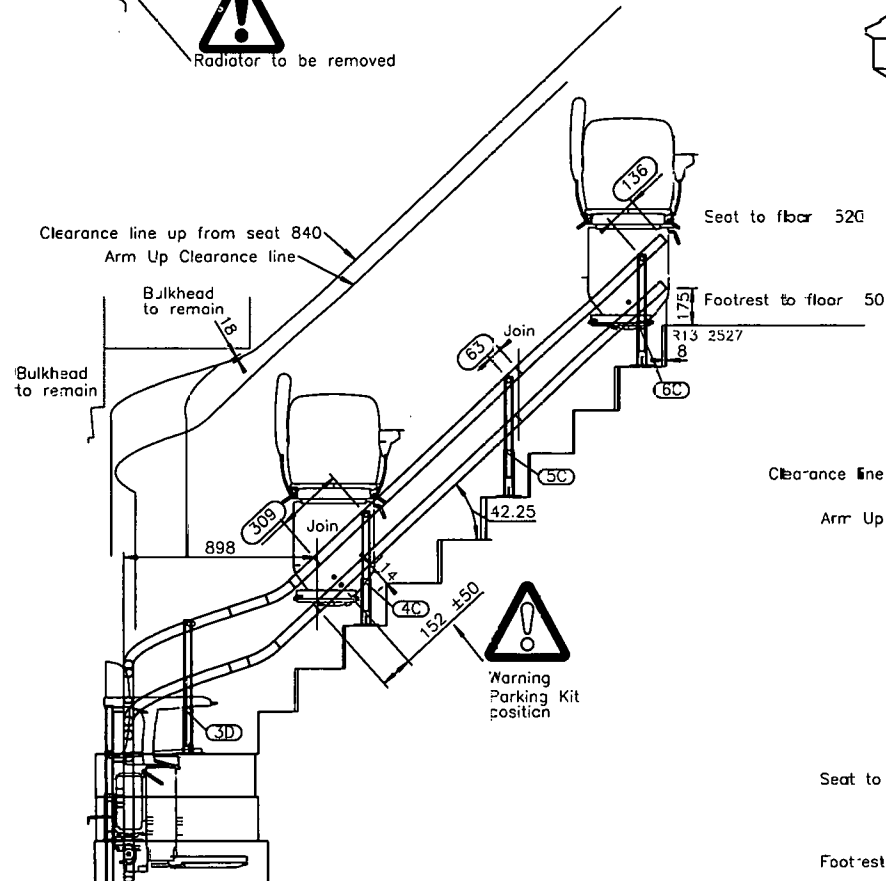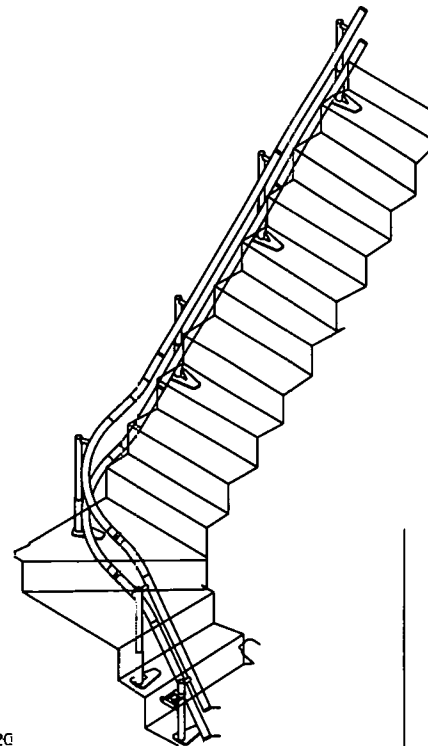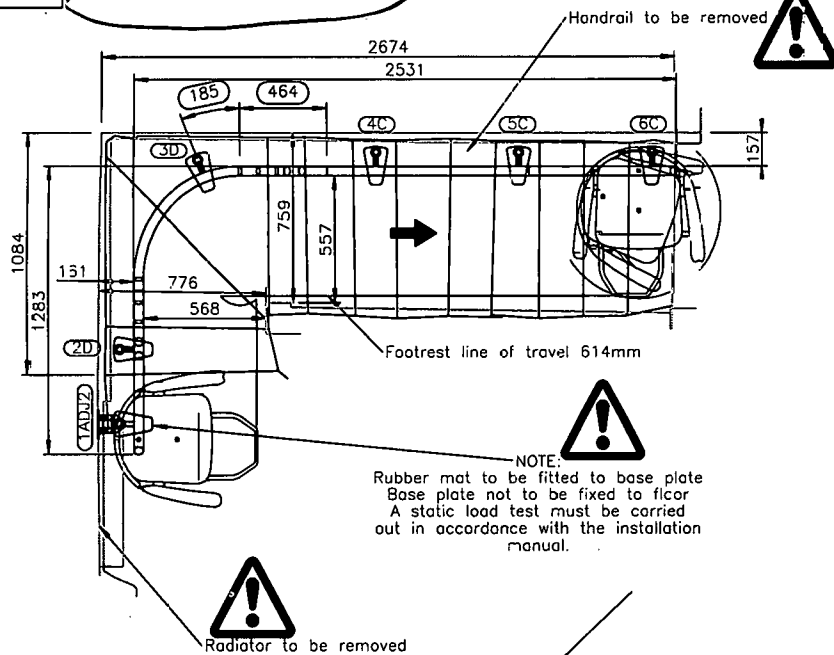

Reference	Tools	Length	End	Sect	Datum	Helical-Rad	S/H
Q5133803BA	319.8		1302	690	701		
Q5133803BB	266.46 373.07		1151	535	1236	18"-R450	
Q5133803BC	-		1270	853	2089		
Q5133803BD	-		913	613	2702		
Q5133803TA	373.07		1051	760	956		
Q5133803TB	266.46 319.8		1131	490	1446	18"-R450	
Q5133803TC	-		1270	853	2299		
Q5133803TD	-		913	613	2912		

Section	Length	T-E2E	B-E2E
A	1029	1051	1002
B	1330	1131	1151
C	1270	1270	1270
D	913	1006	913

Notes:-
Rail support legs are fixed direct to floor and stairs.
Dimensions to wall and floor are nominal only due to normal building tolerances.
All dimensions are in millimetres.
Conversion ratio 25.4mm = 1 inch
Base plate thickness = 6mm

STAIRLIFT SPECIFICATION:	
PARKING KIT 1 NO. OFF WALL BRACKET KIT 1 OFF STAIRCASE TYPE = W SIENA MANUAL STANDARD	
Carriage type: 260 DC (BATTERY) Rail Colour: PEARL	
Points	Hand LEFT
No. of Sections	Length
4	4540

SCALE 1:25			
Square Ness	I/B	-5/+15	Ride Quality
& U Bends	O/B	-15/+5	Upper Flights
Vertical Height		-10/+20	Lower Flight

SHEET 1 OF 1

Stannah

Issue Checked By: DS

JAMES REES	
Stannah Lifts Service Ltd Brackley (60)	
CUSTOMER REF.	Q5109260
	Birch
	SG7
DRAWN J.Lloyd	ENGINEER N.MUMF
DATE 14/07/2025	260-Q5133803

DRAWING

Q5133803

910044 451