

Sam Ives TIFSM L3FRA
SSP Compliance Ltd

1-4 HITCHIN STREET

Fire stopping survey

Thursday 18 July 2024

Prepared For Hendales









3 Issues Identified






3 Issues Incomplete

UNDERSIDE OF FLOOR

Fire boarding required to underside of stair case and flooring above to provide a minimum of 60minutes fire resistance.





Approximately 10m x 3m

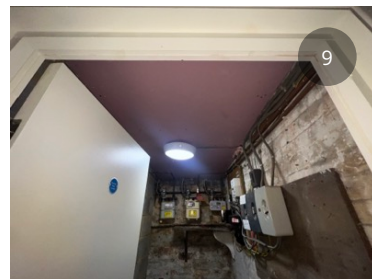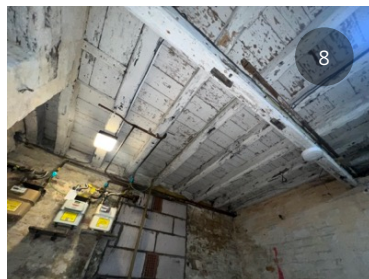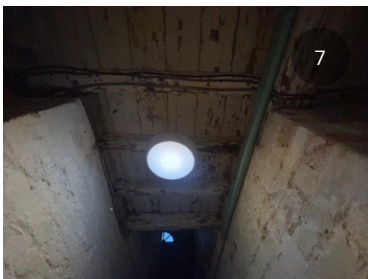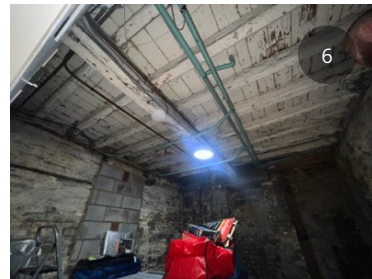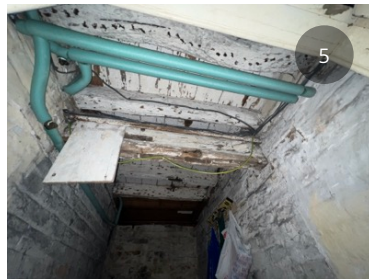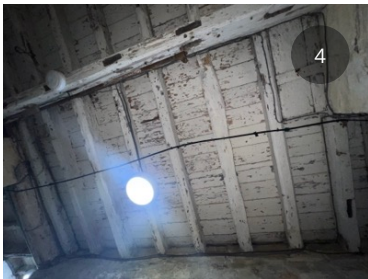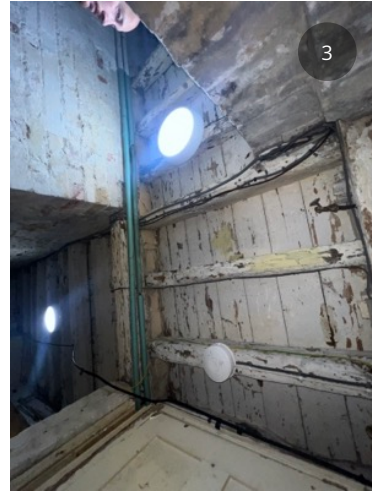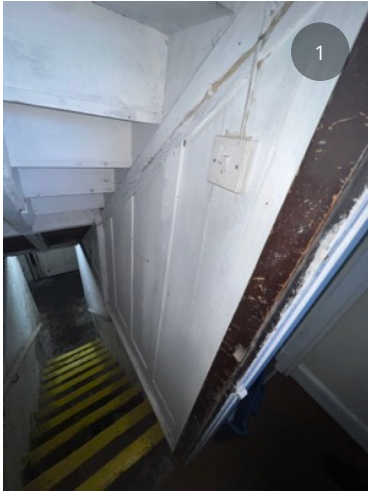

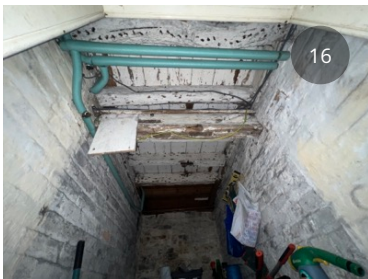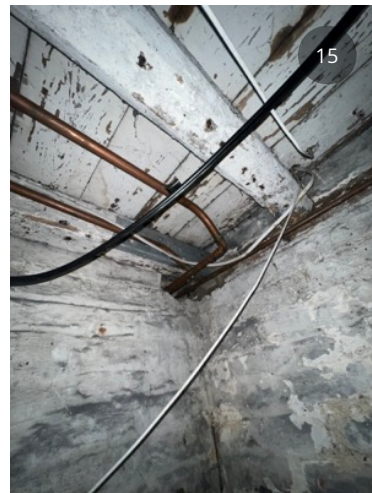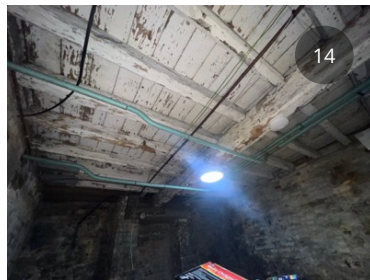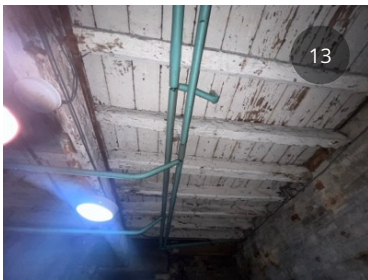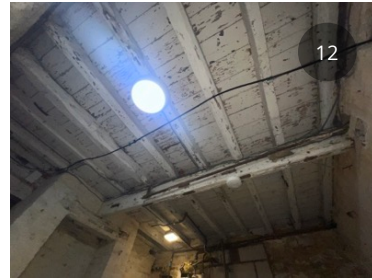

PENETRATIONS

Multiple penetrations through walls and ceiling require fire stopping with ablative materials

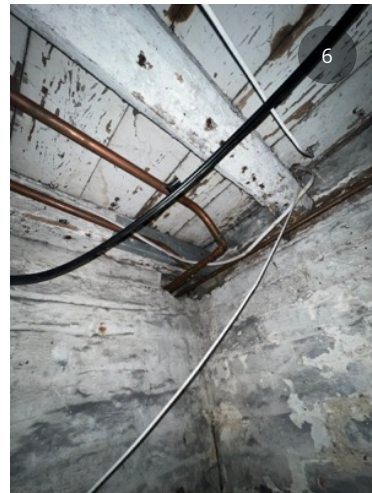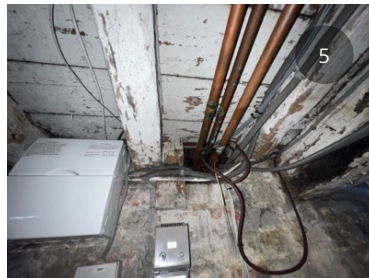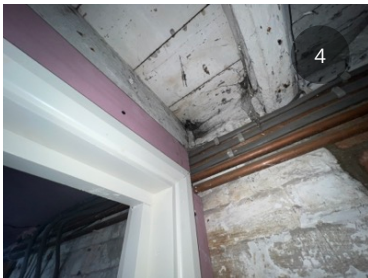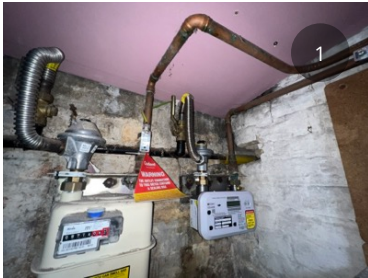

FIRE DOORS

2no fire doors are required to be upgraded to an FD60s to compartmentalise

