



Elevation D

ABBREVIATION KEY / GENERAL NOTES			
1. Internal dimensions are structural, to the face of the studs, blockwork or structural concrete walls.			
2. Plot areas indicated are gross internal areas, room areas indicated are finished areas, not structural. Accuracy of areas shown on plans are subject to tolerances of site construction and detail design.			
3. For site setting out and ground levels, refer to civil engineer's drawings			
4. DPC shown indicative only and to be min 150 above external ground level			
5. Window openings are structural openings. Window manufacture to allow tolerances			
AAV	Air Admittance Valve	RM	Rising Main
AB	Air Brick	RWP	Rainwater Pipe
AOV	Automatic Opening Vent	RH	Rainwater Hopper
BF	Boiler Flue	RWO	Rainwater Outlet
CB	Cavity Barrier	SO	Structural Opening dim
DPC	Damp Proof Course	SSL	Structural Slab Level
DC	Drain Connection	SOP	Setting Out Point
FN	Finished Dimension	SVP	Soil Vent Pipe
FFL	Finished Floor Level	S+VP	Soil Vent Pipe Connection
GL	Grid Line Dimension	TV	Tile Vent
GAS	Gas Point	TOW	Top of Wall
MJ	Movement Joint	ST	Steel
MEV	Mechanical Vent Air Brick	WP	Wind Post
OP	Overflow Pipe	WB	Water Butt Location
OV	Opening Vent	OB	Obscure Glazing
FG	Floor Gully		

MATERIAL KEY	
	Brickwork - Wickford Antique
	Redland 78 Rustic Red Plain tiles to roofs and tile hanging on walls
	Textured roughcast render - K-Rend or similar in cream
	All windows heads in render walls to be finished with a bellmouth drip feature.
	Bases to all rendered wall sections to be finished with a bellmouth drip feature above a brick soldier course.
	Bullseye arch with special radial bricks to all circular windows
	Bases to all tile hung sections to be finished with a brick soldier course below.
	Bonnet Hips - Marley Eternit Ashmore Mitrred hips where bonnet hips not shown
	GRP flat roof dormers
	Bed joint reinforcement to Structural Engineer specification, 2 courses above and below all windows within render and to extend 600mm beyond reveals.
	Double airbrick
	Cavity barrier behind tile hanging. Minimum performance E30, I15. Refer to NHBC Technical Guidance 6.1/34
	Vertical cavity barrier behind tile hanging in corner. Minimum performance E30, I15. Refer to NHBC Technical Guidance 6.1/34



Windows:
White framed UPVC flush casements with equal sight lines and external glazing bars

External Doors:
Composite doors with glazed panels

Roof fascia and soffits:
White UPVC.

All eaves to project 300mm beyond external wall faces.
All verges to project 200mm beyond external wall faces.

Rainwater goods:
Marley Classic range in black UPVC

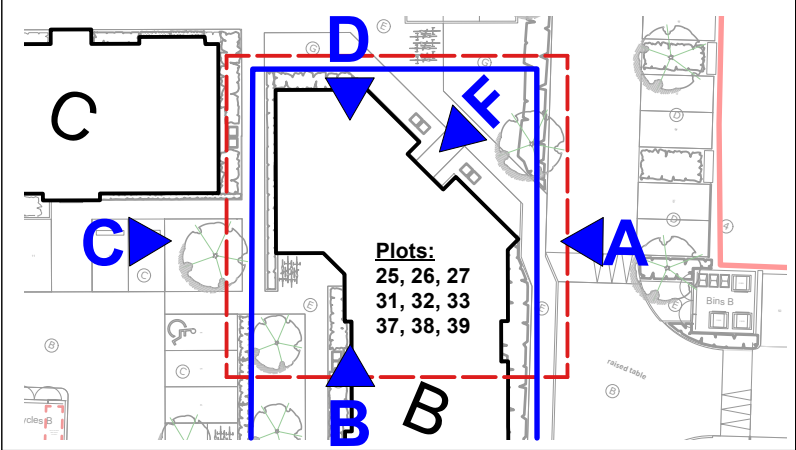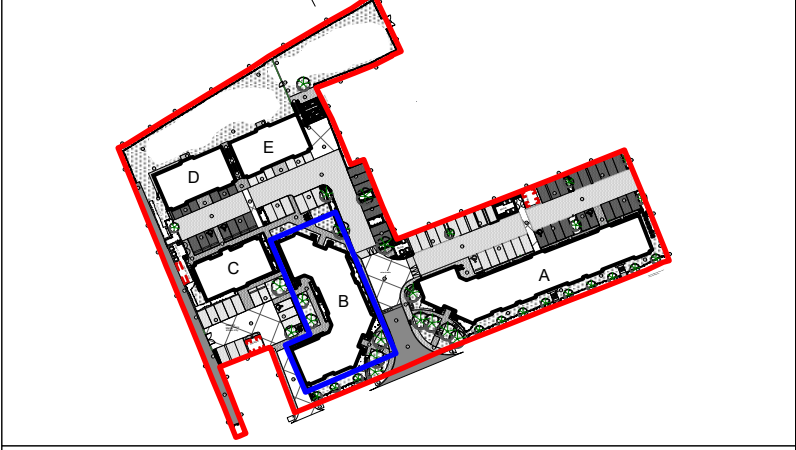

C 17/07/24 Bonnet hips changed to mitred hips as agreed with Letchworth Garden City Heritage Foundation in e-mail dated 17/07/2024.

Preliminary	
Project title	Foundation House, Letchworth First Garden Cities Homes Limited
Drawing title	Block B - Elevation D
Drawing no.	FHL-KSA-BB-ZZ-D-A-315
Scale	1:50@A1
Date	Jan-24
Drawn by	AW
Checked by	CW
Rev	C
Kyle Smart Associates The Barn, Sewell, Dunstable Bedfordshire LU6 1HP telephone 01582 690222 www.kylesmartassociates.co.uk Chartered Architects	

CDM DESIGN REVIEW	
Date Held: 06/10/2023	
Significant risks identified which are either:	
1. Not likely to be obvious to a competent Contractor:	(OB) Obscure glazing
2. Unusual risks:	(G) Guarding to inside of window
3. Likely to be difficult to manage effectively:	Window openings are structural openings.
	Window manufacture to allow tolerances
	Safety glass to windows & doors in accordance with AD N
	Lintel specification refer to manufactures schedule
	Window manufacture to confirm number of trickle vents