

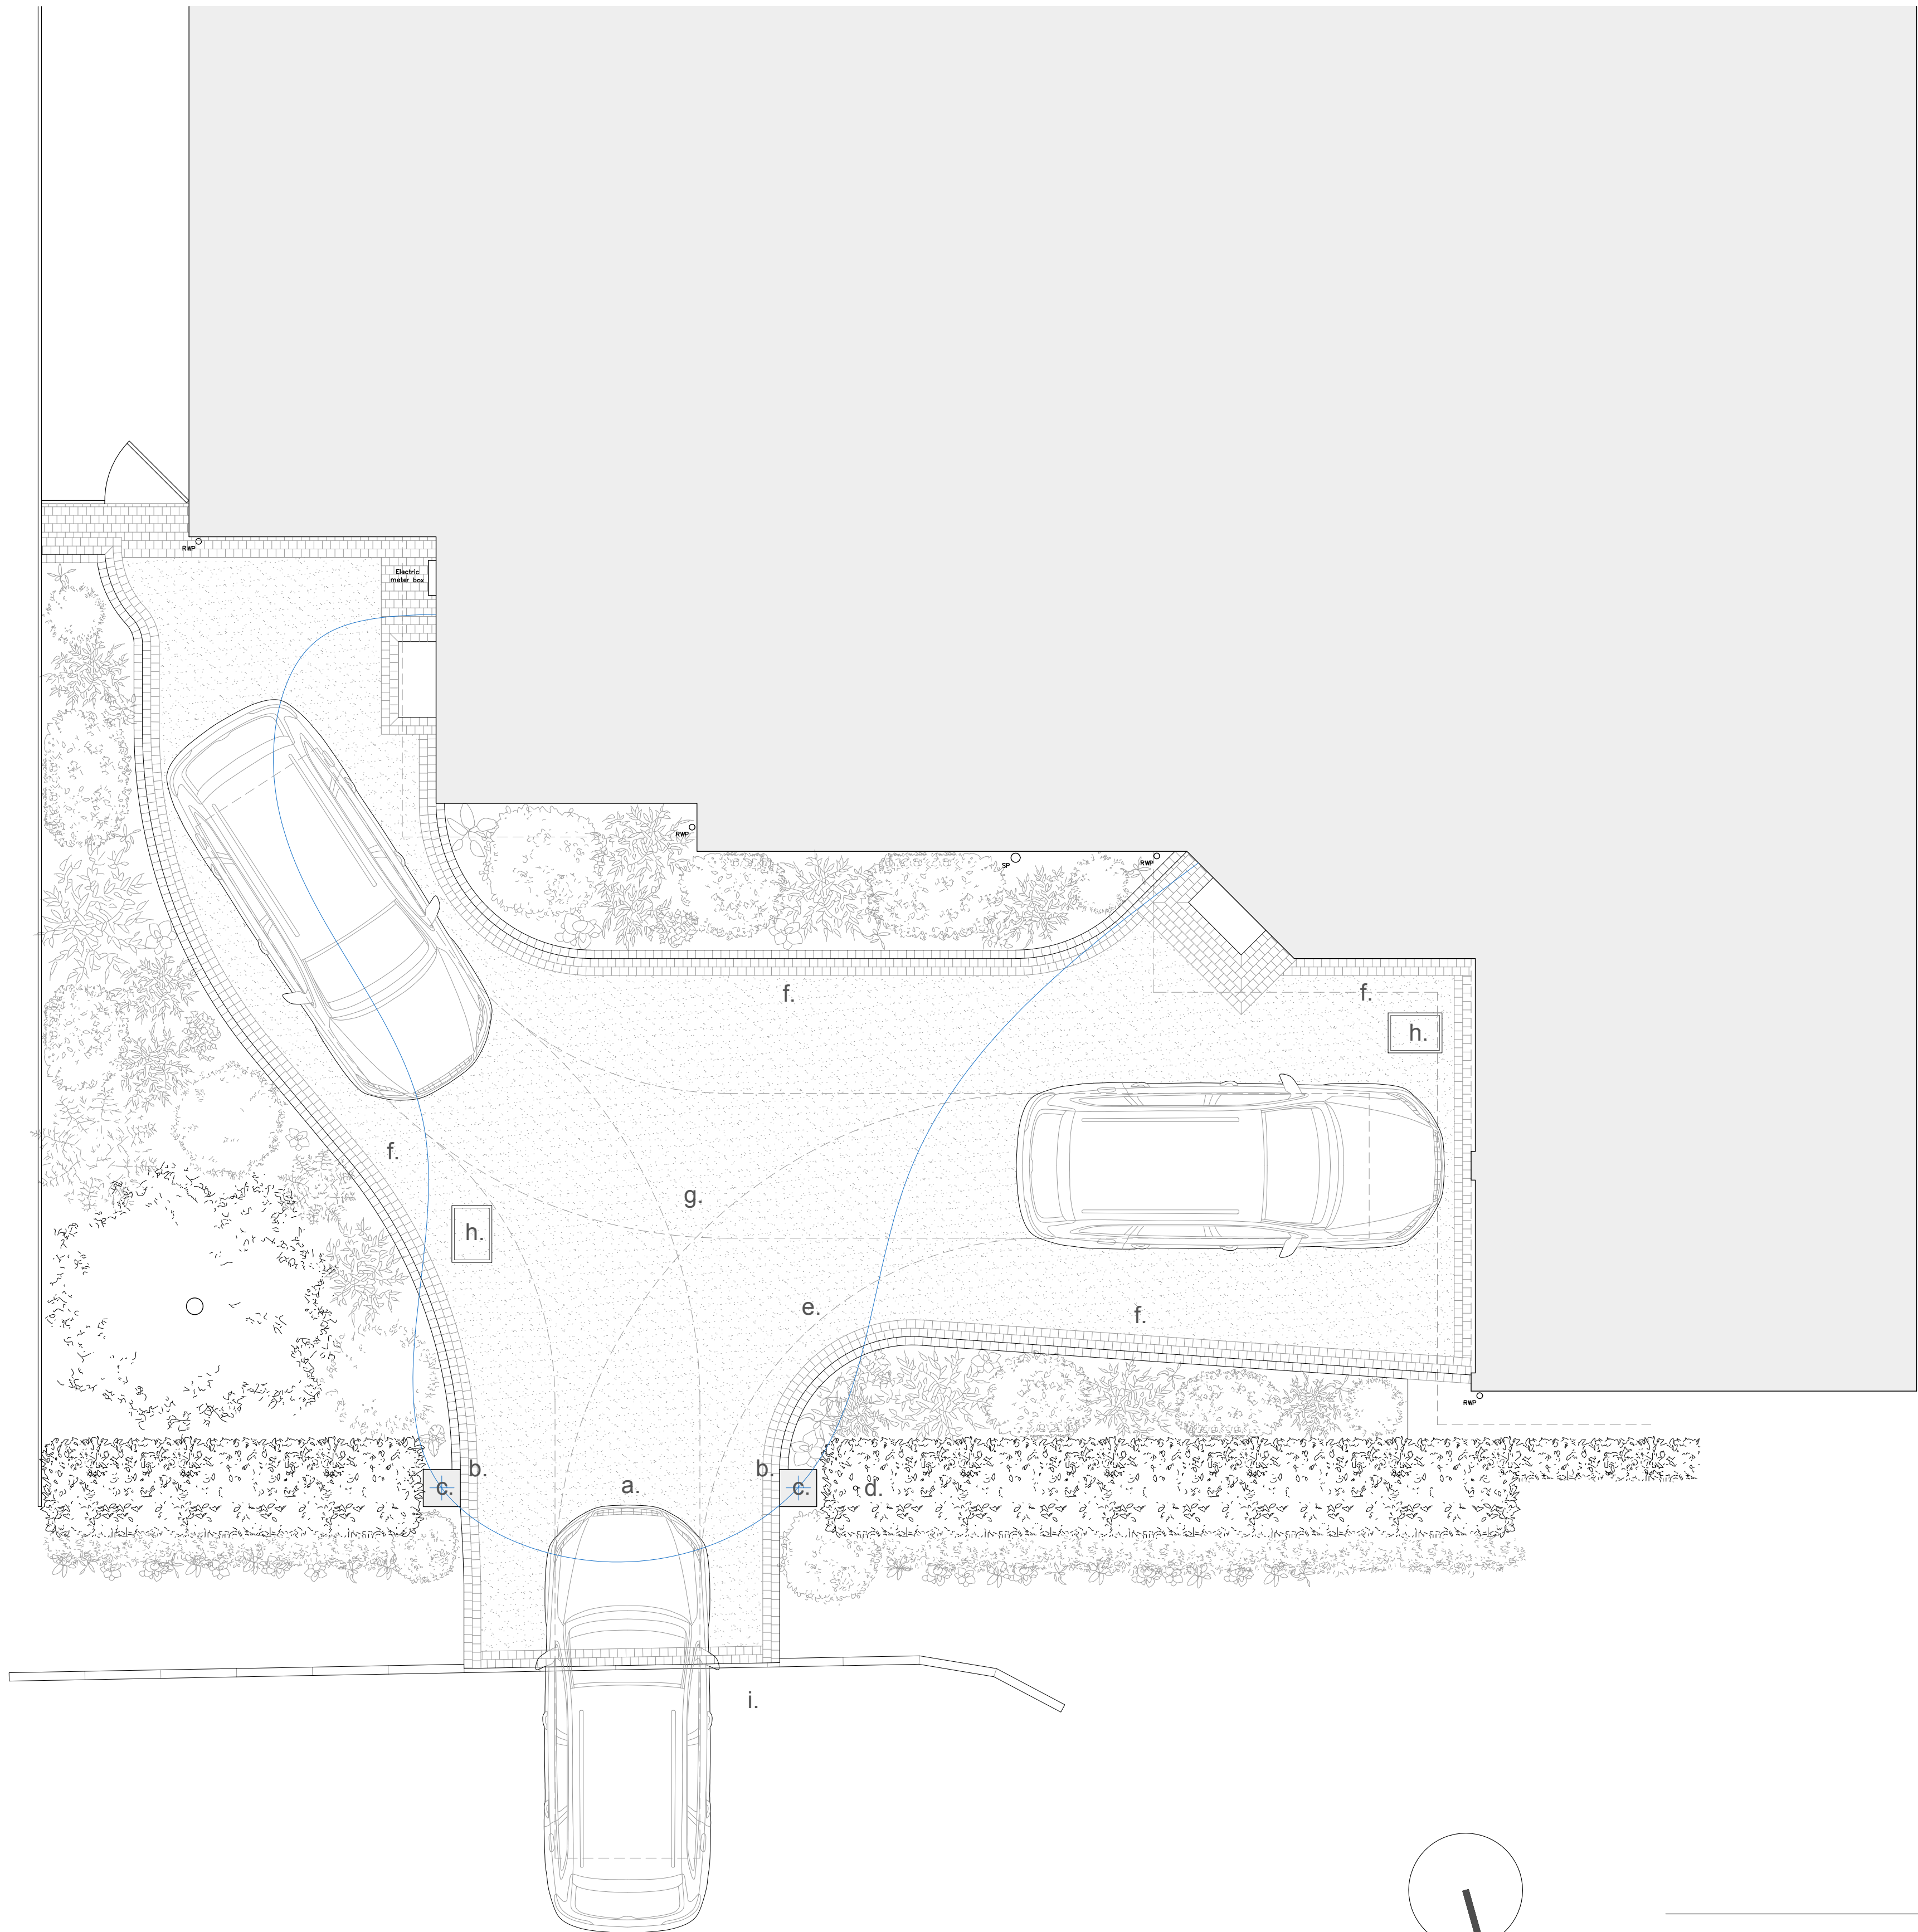


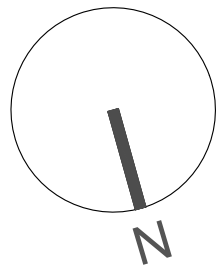

- Notes:
- a. Existing entrance widened by 1m
 - b. Existing piers demolished and replaced with new 440x440x1200 brick piers with pier caps
 - c. New lanterns on top of brick piers
 - d. Existing hedge reduced (first 3 stems/trunks removed)
 - e. Existing planted border reduced using existing edging blocks
 - f. 2 rows of 100 x 100 perimeter cobbles to match colour of existing edging block
 - g. Existing block paving replaced with 'Glacier' resin surface from Resin Surface Specialists
 - h. Existing manhole covers replaced with recessed manhole cover filled with 'Glacier' resin surface to match
 - i. Existing 900 x 100 kerb replaced with 900 x 50 kerb

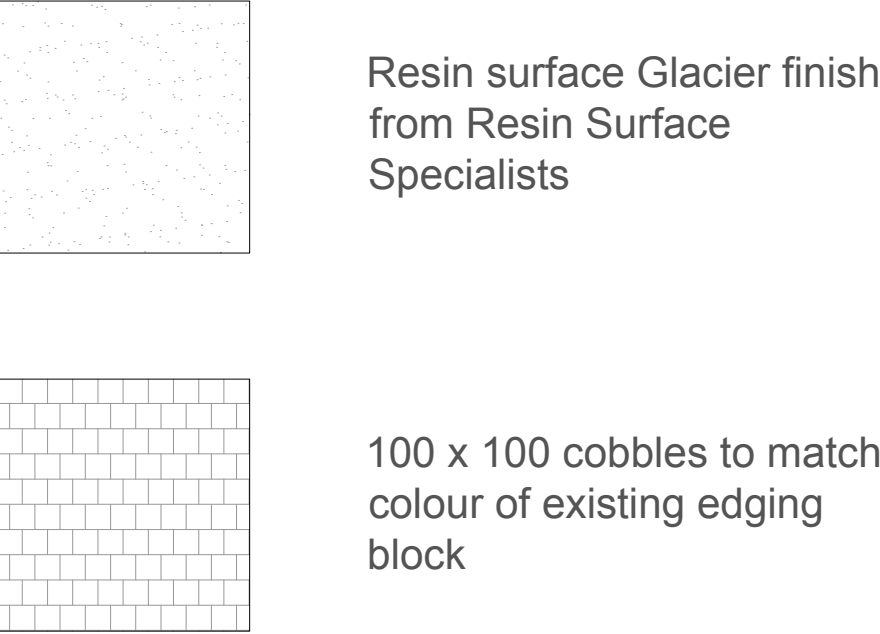

0.5 1 2.5 5m

Suite 4a, 30 Bancroft
Hitchin, SG5 1LE
01462 236866
michael@michaelcollinsarchitects.com
www.michaelcollinsarchitects.com

Note: This drawing is copyright.
Note: These layouts are preliminary until further surveys are undertaken.
Note: Scale and boundaries are indicative.
Note: Ownership boundary indicative based on OS data.
Note: Red dotted line is shown as site boundary.
Note: Elevation key plan not to scale.

Michael Collins Architect LLP

Saxon House, The Chilterns
Job No. 218 Proposed Drive Plan

Stage: Stage 2
Status:

020
REVISION: Scale 1:50 @:A1