


Site Location Plan/Work Requirements

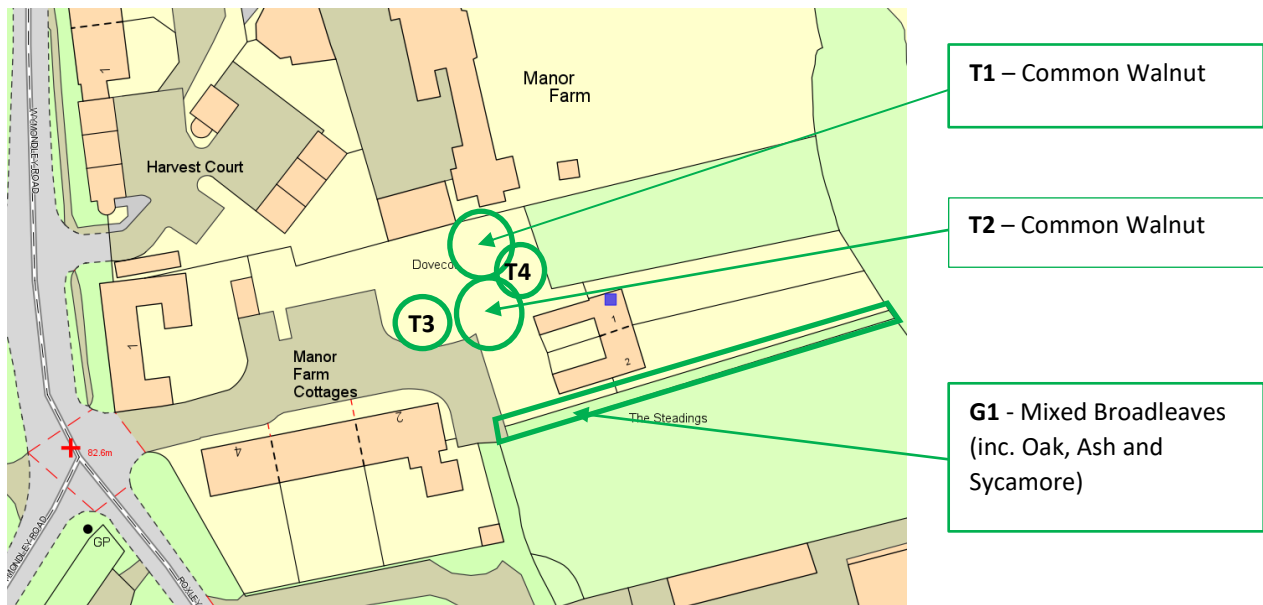

Details

Scheduled summer tree works on Letchworth Garden City Heritage Foundation owned land adjacent to Nos. 1 & 2 The Steadings. Works to be carried out end August/Early September 2023 in the interests of maintaining and reducing risk of physiological damage to Walnut trees. Other minor pruning of general low branches and obstructive growth including removal of major deadwood where the trees are overhanging roof of property.

Works to include:

Tree No.	Species	Work Description
T1	Common Walnut	Reduce lateral branches back to clear adjacent property by 2m
T2	Common Walnut	Raise Crown by 2.5m and reduce crown (lateral branches only) by 1.5-2m (20%)
T3	Common Lime	No Works
T4	Common Walnut	No Works (suppressed tree)
G1	Mixed Broadleaves (inc. Oak, Ash and Sycamore)	Remove 1 no. primary branch rubbing on GPO wire. General reduction of overhanging lateral branches to provide 1.5-2m clearance of property. Remove major deadwood.

All works to be carried out in accordance with BS 3998:2010 Tree Work (Recommendations)

All arisings to be removed for recycling and the site to be left in a tidy and presentable condition upon completion

Supplementary Photographs:



T1



T2



G1 Oak (Primary branch rubbing on GPO line)

Robbie Barnes (Letchworth Garden City Tree and Woodlands Officer)

Date: 14/12/2022