


FirePro Plus PU28 Fire Barrier (90 minute)

Fire Pro PU28 material is suitable for laying under a new thatched roof in place of a traditional roofing felt. It is water resistant, breathable and carries a class 'O' Rating.

Fire Pro PU28 fire barrier is used under thatch and has been for many years, it is used in place of a traditional roofing felt. It not only gives you 90mins of fire and smoke protection but is also waterproof and breathable. Its lightweight design enables ease of use for the contractor. Unlike a traditional fire board it can be penetrated by the emergency services via the loft space in the event of a fire.

PU28 is a flexible fire barrier which provides up to 90 minutes fire protection.

PU28 is a flexible fire membrane commonly used in thatching and roofing industries that provides up to 90 minute fire protection. It can be used in most applications ranging from large building developments, timber framed constructions and scaffold stairwells, to smaller internal or partition walls, suspended ceilings, loft conversions or anywhere building regulations state that a fire barrier is required. The Fire Pro PU28 90 minute fire barrier is 100% British made and provides fire protection with a high temperature treated glass fabric. It is interwoven with a pigmented flame retarded polymer, enhanced with mineral salts and vermiculite to increase performance. It also features a PU coating to suppress any irritant dusts.

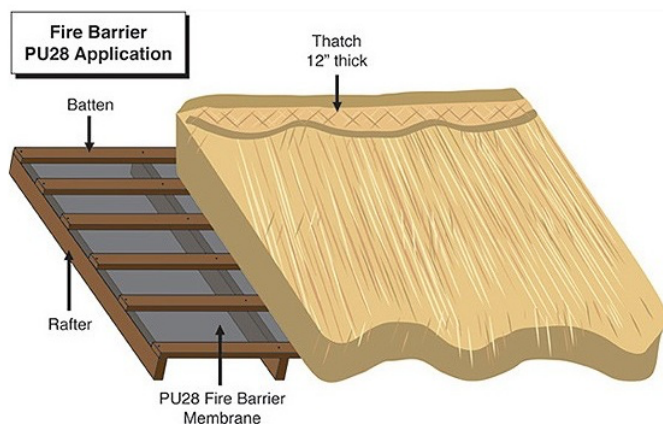

IMO Approved Fabrics

Fully Certified Fabrics from **FirePro** against:

IMO MSC 307(88): Annex 1: Part 5 - Surface Flammability & Part 2 - Smoke and Toxicity

Class 'O' rating - Fire tested to BS476 part 6 & 7

90 minutes fire-resistance rating

Breathable properties

Water resistant

Flexible and easy to use

Insulation properties between 0.04 - 0.06W/mk

Area weight: 470g/m²

Roll length : 50m

BS Certificate available on request

Low in irritants

Abrasion and tear resistant