

Building Regulations England Part L (BREL) Compliance Report

Approved Document L1 2021 Edition, England assessed by Array SAP 10 program, Array

Date: Fri 20 Feb 2026 11:40:47

Project Information			
Assessed By	Stephen Crow	Building Type	House, Semi-detached
OCDEA Registration	EES/031472	Assessment Date	2026-02-20

Dwelling Details			
Assessment Type	As designed	Total Floor Area	92 m ²
Site Reference	Type G	Plot Reference	v1
Address	Type G Land at Blacksmiths Lane, Royston, SG8 8AX		

Client Details	
Name	Chris Anderson
Company	The Turney Trust
Address	Tees Law, Hyde Hall Farm, Sandon, Buntingford, SG9 0RU

This report covers items included within the SAP calculations. It is not a complete report of regulations compliance.

1a Target emission rate and dwelling emission rate			
Fuel for main heating system	Electricity		
Target carbon dioxide emission rate	10.01 kgCO ₂ /m ²		
Dwelling carbon dioxide emission rate	3.42 kgCO ₂ /m ²		OK

1b Target primary energy rate and dwelling primary energy			
Target primary energy	52.12 kWh _{PE} /m ²		
Dwelling primary energy	35.81 kWh _{PE} /m ²		OK

1c Target fabric energy efficiency and dwelling fabric energy efficiency			
Target fabric energy efficiency	34.3 kWh/m ²		
Dwelling fabric energy efficiency	33.4 kWh/m ²		OK

2a Fabric U-values				
Element	Maximum permitted average U-Value [W/m ² K]	Dwelling average U-Value [W/m ² K]	Element with highest individual U-Value	
External walls	0.26	0.18	Walls (1) (0.18)	OK
Party walls	0.2	0	Party Wall (1) (0)	N/A
Curtain walls	1.6	0	N/A	N/A
Floors	0.18	0.13	Heatloss Floor (0.13)	OK
Roofs	0.16	0.13	Roof (1) (0.13)	OK
Windows, doors, and roof windows	1.6	1.4	FW (1.4)	OK
Rooflights	2.2	N/A	N/A	N/A

2b Envelope elements (better than typically expected values are flagged with a subsequent (!))		
Name	Net area [m ²]	U-Value [W/m ² K]
Exposed wall: Walls (1)	61.45	0.18
Exposed wall: Walls (2)	17.23	0.18
Party wall: Party Wall (1)	46.65	0 (!)
Ground floor: Heatloss Floor, Heatloss Floor	49.39	0.13
Exposed roof: Roof (1)	42.38	0.13
Exposed roof: Roof (2)	7.71	0.13

2c Openings (better than typically expected values are flagged with a subsequent (!))				
Name	Area [m ²]	Orientation	Frame factor	U-Value [W/m ² K]
FW, Window	1.81	South	0.7	1.4
RW, Window	4.62	North	0.7	1.4
FGD, Glazed Door	1.85	South	0.7	1.4
RGD, Glazed Door	2.87	North	0.7	1.4
LSW, Window	0.68	West	0.7	1.4
FW2, Window	2.75	South	0.7	1.4

2d Thermal bridging (better than typically expected values are flagged with a subsequent (!))	
Building part 1: Thermal bridging calculated from linear thermal transmittances for each junction	

Main element	Junction detail	Source	Psi value [W/mK]	Drawing / reference
External wall	E2: Other lintels (including other steel lintels)	Government-approved scheme	0.025 (!)	
External wall	E3: Sill	Government-approved scheme	0.022 (!)	
External wall	E4: Jamb	Government-approved scheme	0.017 (!)	
External wall	E5: Ground floor (normal)	Government-approved scheme	0.061	
External wall	E6: Intermediate floor within a dwelling	Government-approved scheme	0.001 (!)	
External wall	E10: Eaves (insulation at ceiling level)	Government-approved scheme	0.057	
External wall	E16: Corner (normal)	Government-approved scheme	0.042	
External wall	E18: Party wall between dwellings	Government-approved scheme	0.033 (!)	
Party wall	P1: Ground floor	Government-approved scheme	0.043	
Party wall	P3: Intermediate floor between dwellings (in blocks of flats)	SAP table default	0 (!)	
Party wall	P4: Roof (insulation at ceiling level)	Government-approved scheme	0.04	
External wall	E11: Eaves (insulation at rafter level)	Government-approved scheme	0.018 (!)	
External wall	E13: Gable (insulation at rafter level)	Government-approved scheme	0.036 (!)	

3 Air permeability (better than typically expected values are flagged with a subsequent (!))

Maximum permitted air permeability at 50Pa	8 m ³ /hm ²	
Dwelling air permeability at 50Pa	5.01 m ³ /hm ² , Design value	OK
Air permeability test certificate reference		

4 Space heating

Main heating system 1: Heat pump with radiators or underfloor heating - Electricity	
Efficiency	299.0%
Emitter type	Both radiators and underfloor
Flow temperature	35°C
System type	Heat Pump
Manufacturer	Mitsubishi Electric Europe B.V.
Model	PUZ-WZ60VAA and EHPT20X-MEHEW
Commissioning	
Secondary heating system: N/A	
Fuel	N/A
Efficiency	N/A
Commissioning	

5 Hot water

Cylinder/store - type: N/A	
Capacity	N/A
Declared heat loss	N/A
Primary pipework insulated	N/A
Manufacturer	
Model	
Commissioning	
Waste water heat recovery system 1 - type: N/A	
Efficiency	
Manufacturer	
Model	

6 Controls

Main heating 1 - type: Time and temperature zone control by arrangement of plumbing and electrical services	
Function	
Ecodesign class	
Manufacturer	
Model	
Water heating - type: N/A	
Manufacturer	
Model	

7 Lighting		
Minimum permitted light source efficacy	75 lm/W	
Lowest light source efficacy	80 lm/W	OK
External lights control	N/A	
8 Mechanical ventilation		
System type: N/A		
Maximum permitted specific fan power	N/A	
Specific fan power	N/A	N/A
Minimum permitted heat recovery efficiency	N/A	
Heat recovery efficiency	N/A	N/A
Manufacturer/Model		
Commissioning		
9 Local generation		
N/A		
10 Heat networks		
N/A		
11 Supporting documentary evidence		
N/A		
12 Declarations		
a. Assessor Declaration		
This declaration by the assessor is confirmation that the contents of this BREL Compliance Report are a true and accurate reflection based upon the design information submitted for this dwelling for the purpose of carrying out the "As designed" assessment, and that the supporting documentary evidence (SAP Conventions, Appendix 1 (documentary evidence) schedules the minimum documentary evidence required) has been reviewed in the course of preparing this BREL Compliance Report.		
Signed:	Assessor ID:	
Name:	Date:	
b. Client Declaration		
N/A		

Predicted Energy Assessment



Type G, Land at Blacksmiths Lane, Royston,
Hertfordshire, SG8 8AX


Dwelling type:
Date of assessment:
SAP Version:
Produced by:
Total floor area:
DRRN:

House, Semi-Detached
20/02/2026
10.2
Joe Cantwell Dillon
91.77 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP 10 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

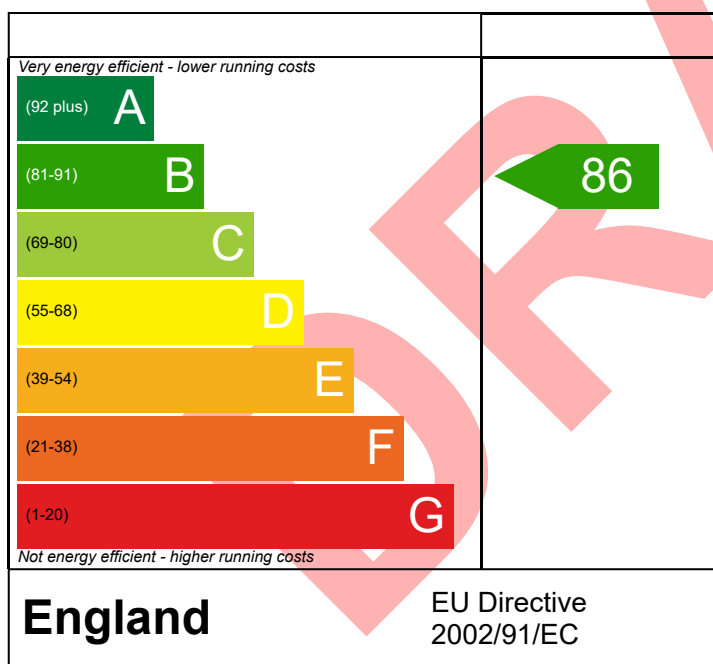

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

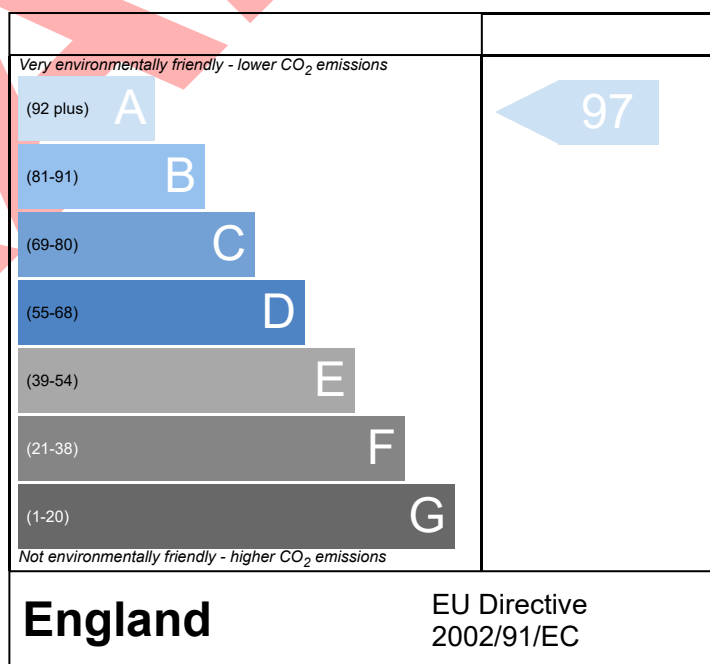

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

Summary for Input Data



Plot Reference	Type G	Issued on Date	20/02/2026
Assessment Reference	v1	Plot Type Ref	
Plot Address	Type G, Land at Blacksmiths Lane, Royston, Hertfordshire, SG8 8AX	SAP Version	10.2

SAP Rating	86 B	DER	3.42	TER	10.01
Environmental	97 A	% DER < TER			65.83
CO ₂ Emissions (t/year)	0.29	DFEE	33.43	TFEE	34.28
Compliance Check	See BREL	% DFEE < TFEE			2.46
% DPER < TPER	31.29	DPER	35.81	TPER	52.12

Assessor Details	Mr. Joe Cantwell Dillon	Assessor ID	BL89-0001
Client	S39576, Chris Anderson		

SUMMARY FOR INPUT DATA FOR: New Build (As Designed)

Orientation	South	
Property Tenture	ND	
Transaction Type	6	
Terrain Type	Suburban	
1.0 Property Type	House, Semi-Detached	
2.0 Number of Storeys	2	
3.0 Date Built	2026	
4.0 Sheltered Sides	2	
5.0 Sunlight/Shade	Average or unknown	
6.0 Thermal Mass Parameter	Precise calculation	
Thermal Mass	186.60	kJ/m²

7.0 Electricity Tariff	Standard
Smart electricity meter fitted	No
Smart gas meter fitted	No

7.0 Measurements		Heat Loss Perimeter	Internal Floor Area	Average Storey Height
	Ground floor:	19.88 m	49.39 m ²	2.40 m
	1st Storey:	13.44 m	42.38 m ²	2.70 m

8.0 Living Area	16.39	m ²
-----------------	-------	----------------

Description	Type	Construction	U-Value (W/m ² K)	Kappa (kJ/m ² K)	Gross Area(m ²)	Nett Area (m ²)	Shelter Res	Shelter	Openings	Area Calculation Type
External Wall (Brick)	Cavity Wall	Cavity wall; plasterboard on dabs or battens, lightweight aggregate block, filled cavity, any outside structure	0.18	110.00	73.28	61.45	0.00	None	11.83	Enter Gross Area
External Wall (Rendered)	Cavity Wall	Cavity wall; plasterboard on dabs or battens, lightweight aggregate block, filled cavity, any outside structure	0.18	110.00	19.98	17.23	0.00	None	2.75	Enter Gross Area

Description	Type	Construction	U-Value (W/m ² K)	Kappa (kJ/m ² K)	Area (m ²)	Shelter Res	Shelter
Party Wall 1	Solid Wall	Other	0.00	0.00	46.65		None

Description	Construction	Kappa (kJ/m ² K)	Area (m ²)
Internal Wall 1	Plasterboard on timber frame	9.00	160.20

Description	Type	Construction	U-Value (W/m ² K)	Kappa (kJ/m ² K)	Gross Area(m ²)	Nett Area (m ²)	Shelter Code	Shelter Factor	Calculation Type	Openings
External Roof 1	External Plane Roof	Plasterboard, insulated at ceiling level	0.13	9.00	42.38	42.38	None	0.00	Enter Gross Area	0.00
External Roof 3	External Slope Roof	Plasterboard, insulated slope	0.13	9.00	7.71	7.71	None	0.00	Enter Gross Area	0.00

Description	Storey	Construction	Kappa	Area (m ²)
-------------	--------	--------------	-------	------------------------

Summary for Input Data

Internal Ceiling 1 Lowest occupied Plasterboard ceiling, carpeted chipboard floor 9.00 42.38

11.0 Heat Loss Floors

Description	Type	Storey Index	Construction	U-Value (W/m²K)	Shelter Code	Shelter Factor	Kappa (kJ/m²K)	Area (m²)
Heatloss Floor	Ground Floor - Solid	Lowest occupied	Slab on ground, screed over insulation	0.13	None	0.00	110.00	49.39

11.2 Internal Floors

Description	Storey Index	Construction	Kappa (kJ/m²K)	Area (m²)
Internal Floor 1	+1	Plasterboard ceiling, carpeted chipboard floor	18.00	42.38

12.0 Opening Types

Description	Data Source	Type	Glazing	Glazing Gap	Filling Type	G-value	Frame Type	Frame Factor	U Value (W/m²K)
Window	Manufacturer	Window	Double Low-E Soft 0.1			0.63		0.70	1.40
Glazed Door	Manufacturer	Window	Double Low-E Soft 0.1			0.63		0.70	1.40

13.0 Openings

Name	Opening Type	Location	Orientation	Area (m²)	Pitch
FW	Window	External Wall (Brick)	South	1.81	
RW	Window	External Wall (Brick)	North	4.62	
FGD	Glazed Door	External Wall (Brick)	South	1.85	
RGD	Glazed Door	External Wall (Brick)	North	2.87	
LSW	Window	External Wall (Brick)	West	0.68	
FW2	Window	External Wall (Rendered)	South	2.75	

14.0 Conservatory

None

15.0 Draught Proofing

100 %

16.0 Draught Lobby

No

17.0 Thermal Bridging

Calculate Bridges

17.1 List of Bridges

Bridge Type	Source Type	Length	Psi	Adjusted Reference:	Imported
E2 Other lintels (including other steel lintels)	Gov Approved Scheme	10.19	0.03	0.03	No
E3 Sill	Gov Approved Scheme	7.84	0.02	0.02	No
E4 Jamb	Gov Approved Scheme	21.84	0.02	0.02	No
E5 Ground floor (normal)	Gov Approved Scheme	19.88	0.06	0.06	No
E6 Intermediate floor within a dwelling	Gov Approved Scheme	13.44	0.00	0.00	No
E10 Eaves (insulation at ceiling level)	Gov Approved Scheme	18.49	0.06	0.06	No
E16 Corner (normal)	Gov Approved Scheme	9.56	0.04	0.04	No
E18 Party wall between dwellings	Gov Approved Scheme	9.56	0.03	0.03	No
P1 Party wall - Ground floor	Gov Approved Scheme	9.78	0.04	0.04	No
P3 Party wall - Intermediate floor between dwellings (in blocks of flats)	Table K1 - Default	8.39	0.00	0.00	No
P4 Party wall - Roof (insulation at ceiling level)	Gov Approved Scheme	8.39	0.04	0.04	No
E11 Eaves (insulation at rafter level)	Gov Approved Scheme	5.05	0.02	0.02	No
E13 Gable (insulation at rafter level)	Gov Approved Scheme	1.53	0.04	0.04	No

Y-value 0.02 W/m²K

19.0 Mechanical Ventilation

Mechanical Ventilation

Mechanical Ventilation System Present No

20.0 Fans, Open Fireplaces, Flues

Number of open chimneys 0

Number of open flues 0

Number of chimneys/flues attached to closed fire 0

Number of flues attached to solid fuel boiler 0

Number of flues attached to other heater 0

Number of blocked chimneys 0

Number of intermittent extract fans 3

Number of passive vents 0

Number of flueless gas fires 0

21.0 Fixed Cooling System

No

22.0 Pressure Testing

Designed AP₅₀ 5.01 m³/(h.m²) @ 50 Pa

Test Method Blower Door

22.0 Lighting

Summary for Input Data

No Fixed Lighting	No										
	Name Lighting 1	Efficacy 80.00	Power 5.00	Capacity 400.00	Count 20						

24.0 Main Heating 1	Database										
Percentage of Heat	100.00 %										
Database Ref. No.	108374										
Fuel Type	Electricity										
In Winter	298.95										
In Summer	296.11										
Model Name	PUZ-WZ60VAA and EHPT20X-MEHEW										
Manufacturer	Mitsubishi Electric Europe B.V.										
System Type	Heat Pump										
Controls SAP Code	2207										
Controls description	Time and temperature zone control by arrangement										
Is MHS Pumped	Pump in heated space										
Heating Pump Age	2013 or later										
Heat Emitter	Radiators and Underfloor										
Underfloor Heating	Yes - Pipes in thin screed										
Flow Temperature	Enter value										
Flow Temperature Value	35.00										

25.0 Main Heating 2	None										
----------------------------	------	--	--	--	--	--	--	--	--	--	--

26.0 Heat Networks	None										
---------------------------	------	--	--	--	--	--	--	--	--	--	--

27.0 Secondary Heating	None										
-------------------------------	------	--	--	--	--	--	--	--	--	--	--

28.0 Water Heating	Main Heating 1										
Water Heating	901										
SAP Code	No										
Flue Gas Heat Recovery System	No										
Waste Water Heat Recovery Instantaneous System 1	No										
Waste Water Heat Recovery Instantaneous System 2	No										
Waste Water Heat Recovery Storage System	No										
Solar Panel	No										
Water use <= 125 litres/person/day	Yes										
Cold Water Source	From mains										
Bath Count	1										
Immersion Only Heating Hot Water	No										

28.1 Showers											
Description	Shower Type	Flow Rate [l/min]	Rated Power [kW]	Connected	Connected To						
s1	Combi boiler or unvented hot water system	11.00		No							

28.3 Waste Water Heat Recovery System											
--	--	--	--	--	--	--	--	--	--	--	--

29.0 Hot Water Cylinder	Internal Store										
Insulation Type	Measured Loss										
Cylinder Volume	200.00 L										
Loss	1.59 kWh/day										

34.0 Small-scale Hydro	None										
Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

Recommendations											
Lower cost measures	None										

Summary for Input Data



Further measures to achieve even higher standards

	Typical Cost	Typical savings per year	Ratings after improvement	
			SAP rating	Environmental Impact
Solar water heating	£8,000 - £10,000	£255	B 86	A 97
Photovoltaic			A 92	A 98
Wind turbine			0	0

Thermal Bridging

Plot Reference	Type G	Issued on Date	20/02/2026
Assessment Reference	v1	Plot Type Ref	Semi-Detached House
Plot Address	Type G, Land at Blacksmiths Lane, Royston, Hertfordshire, SG8 8AX	SAP Version	10.2

SAP Rating	86 B	DER	3.42	TER	10.01
Environmental	97 A	% DER < TER			65.83
CO ₂ Emissions (t/year)	0.29	DFEE	33.43	TFEE	34.28
Compliance Check	See BREL	% DFEE < TFEE			2.46
% DPER < TPER	31.29	DPER	35.81	TPER	52.12

Assessor Details	Mr. Joe Cantwell Dillon	Assessor ID	BL89-0001
Client	S39576, Chris Anderson		

	Junction details	Source Type	Psi (W/mK)	Length (m)	Result	Reference
External wall	E2 Other lintels (including other steel lintels)	Gov Approved Scheme	0.025	10.19	0.25	
External wall	E3 Sill	Gov Approved Scheme	0.022	7.84	0.17	
External wall	E4 Jamb	Gov Approved Scheme	0.017	21.84	0.37	
External wall	E5 Ground floor (normal)	Gov Approved Scheme	0.061	19.88	1.21	
External wall	E6 Intermediate floor within a dwelling	Gov Approved Scheme	0.001	13.44	0.01	
External wall	E10 Eaves (insulation at ceiling level)	Gov Approved Scheme	0.057	18.49	1.05	
External wall	E16 Corner (normal)	Gov Approved Scheme	0.042	9.56	0.40	
External wall	E18 Party wall between dwellings	Gov Approved Scheme	0.033	9.56	0.32	
Party wall	P1 Party wall - Ground floor	Gov Approved Scheme	0.043	9.78	0.42	
Party wall	P3 Party wall - Intermediate floor between dwellings (in blocks of flats)	Table K1 - Default	0.000	8.39	0.00	
Party wall	P4 Party wall - Roof (insulation at ceiling level)	Gov Approved Scheme	0.040	8.39	0.34	
External wall	E11 Eaves (insulation at rafter level)	Gov Approved Scheme	0.018	5.05	0.09	
External wall	E13 Gable (insulation at rafter level)	Gov Approved Scheme	0.036	1.53	0.06	

Total: 143.94 W/mK:
Y-Value: 0.02 W/m²K:

Energy Report





Dwelling Address	Type G, Land at Blacksmiths Lane, Royston, Hertfordshire, SG8 8AX
Reference	Type G-v1
SAP Version	10.2
Assessment Date	19/02/2026
Submission Date	
Property Type	House, Semi-Detached
Total Floor Area	92

This Energy Report has been generated using the UK's National Calculation Methodology for dwellings, Standard Assessment Procedure (SAP). This methodology is used to assess the energy efficiency of dwellings which is calculated based on a dwelling's heating, hot water, ventilation and lighting usage.

This document is not an Energy Performance Certificate (EPC) as required by the Energy Performance of Buildings Regulations



Energy Efficiency Rating

Most energy efficient - lower running costs

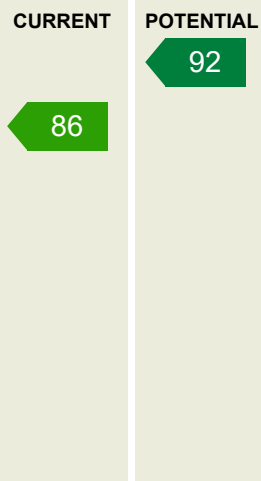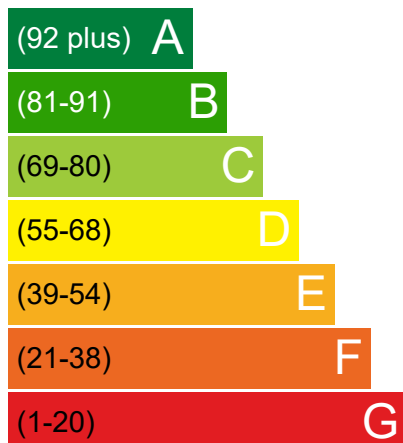

Carbon Dioxide (CO2) Emissions Rating

Very environmentally friendly - lower CO2 emissions

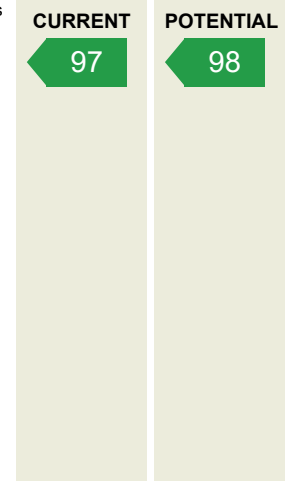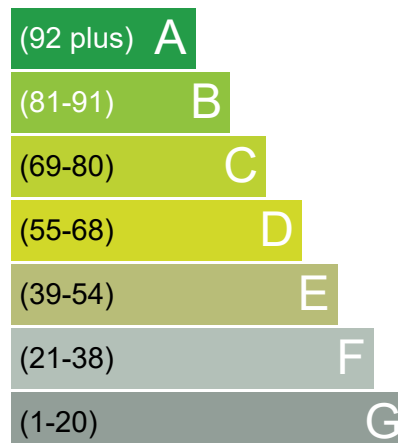

Additional ratings for your home

Energy Report

	Primary Energy	Energy	Carbon	Cost	HTC
CURRENT	33.23 kWh	1973 kWh	291 kg	560.84 £	94 W/K
POTENTIAL	18.60 kWh	1076 kWh	171 kg	305.79 £	94 W/K

Breakdown of property's energy performance

Each feature is assessed as one of the following:

Very Poor	Poor	Average	Good	Very Good
-----------	------	---------	------	-----------

Feature	Description	Energy Performance
Walls	Average thermal transmittance 0.18 W/m ² K	Very Good
Roof	Average thermal transmittance 0.13 W/m ² K	Very Good
Floor	Average thermal transmittance 0.13 W/m ² K	Very Good
Windows	High performance glazing	Good
Main heating	Air source heat pump, radiators and underfloor, electric	Good
Main heating controls	Time and temperature zone control	Very Good
Secondary heating	None	
Hot water	From main system	Good
Lighting	Good lighting efficiency	Good
Air tightness	Air permeability [AP50] = 5.0 m ³ /h.m ² (assumed)	Good

Recommendations

The recommended measures provided below will help to improve the energy efficiency of the dwelling. To reach the dwelling's potential energy rating all of the recommended measures shown below would need to be installed. Having these measures installed individually or in any other order may give a different result when compared with the cumulative potential rating.

Recommended measures	Cumulative savings (per year)	Cumulative rating	Typical costs	Incremental savings (per year)	Cumulative CO2 rating
Solar water heating	£44	B 86			A 97
Photovoltaic	£299	A 92	£8,000 - £10,000	£255	A 98

The typical cost is based on average installation prices across the country so may not be representative of the actual costs in your area.

Estimated energy costs of the dwelling

The table below shows the estimated running costs of the space and water heating and lighting within the dwelling. It does not include the energy used from household appliances. The estimated annual costs after potential improvements indicates the total energy cost if all recommended measures named above were installed.

	Estimated annual costs	Estimated annual costs after potential improvements	Potential future savings
Lighting 	£66	£66	
Heating 	£221	£221	
Hot Water 	£273	£273	
New Technologies e.g. Impact of PV	£0	-(£255)	
TOTAL	£561	£306	

Estimated energy use and potential savings



Space Heating

778

kWh per year



Water Heating

961

kWh per year

About this document

Created by:
Company/Trading name:
Phone number:
Email address:

Disclaimer

This Energy Report should not under any circumstances be treated as a Condition Survey and cannot be used to indicate that any element of the dwelling (e.g. heating system) is working correctly.
This Energy Report must not be used in situations where an Energy Performance Certificate (EPC) is required.
This Energy Report is generated from a set of data inputs which may not reflect the actual dimensions, services or construction of the dwelling.
The calculation used to generate this report reflects the SAP Methodology current at the time of report generation.

Glossary terms for additional metrics

Primary Energy	The measure of the energy required for lighting, heating and hot water in a property. This includes the efficiency of the property's heating system, power station efficiency for electricity and the energy used to produce the fuel and deliver it to the property.
Energy Used	The estimated amount of fuel energy for lighting, heating and hot water for the property. The estimate is based on typical usage which is likely to be different to actual consumption.
Carbon (CO ₂)	The current emissions based on the energy estimates.
Cost	The estimated cost of energy. The cost of each unit of fuel is based on an industry standard which is likely to be different to those the occupier actually pays.
Heat Transfer Coefficient	Heat flow through the property envelope where internal and external temperatures are different.