


File name: \\UK.WSPGROUP\CONCENTRAL\DATA\PROJECTS\10098000\07008227 - HIGHOVER FARM, HITCHIN - DETAILED DESIGN\HOF-WSP-ZZ-PH1-DR-C-1551.DWG, printed on 27 February 2026 12:42:55 by Ng, Jassan


UNTIL TECHNICAL APPROVAL HAS BEEN OBTAINED FROM THE RELEVANT LOCAL AUTHORITIES OR STATUTORY BODIES, IT SHOULD BE UNDERSTOOD THAT ALL DRAWINGS ARE ISSUED AS PRELIMINARY AND NOT FOR CONSTRUCTION. SHOULD THE CONTRACTOR AND / OR EMPLOYER COMMENCE WORK PRIOR TO APPROVAL BEING GIVEN, IT IS ENTIRELY AT THEIR OWN RISK



- NOTES:
1. ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE STATED.
 2. ALL LEVELS ARE IN METRES ABOVE ORDNANCE DATUM.
 3. DRAWING BASED ON TOPOGRAPHICAL SURVEY BY MK SURVEYS DATED AUGUST 2022
 4. ALL WORKS TO BE UNDERTAKEN IN ACCORDANCE WITH THE SPECIFICATION FOR HIGHWAY WORKS (SHW), HERTFORDSHIRE COUNCIL STANDARD DETAILS.
 5. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT DRAWINGS AND DETAILS
 6. RADIIUS KERBS TO BE USED WHERE REQUIRED/APPROPRIATE. WHERE DROPPED KERBS ARE TO BE LAID TO A RADIUS THEY SHALL BE DISC CUT IN HALF TO FORM A MITRE.
 7. WHERE THE EXISTING AND PROPOSED KERB/EDGING ARE TO BE TIED IN THEY SHALL BE DISC CUT TO FORM A CLEAN VERTICAL FACE AND CLOSE JOINT.
 8. NO OPEN JOINTS WILL BE ACCEPTED, NO CHIPPED, DAMAGED OR REPAIRED KERBS WILL BE ACCEPTED.
 9. CONTRACTOR SHOULD PROVIDE MECHANICAL LIFTING AIDS FOR ITEMS HEAVIER THAN 20 KGS. IF MECHANICAL LIFTING AIDS ARE IMPRACTICAL A RISK ASSESSMENT SHOULD BE UNDERTAKEN WHICH IDENTIFIES THE APPROPRIATE CONTROL MEASURES REQUIRED TO AVOID RISK OF INJURY FROM MANUAL HANDLING.
 10. CONTRACTOR TO PROVIDE CBR RESULTS TO HCC PRIOR TO COMMENCEMENT OF PAVEMENT WORKS.
 11. FOR TYPICAL SECTION DETAILS REFER TO DRAWING HOF-WSP-S278-ZZ-DR-C-07102.

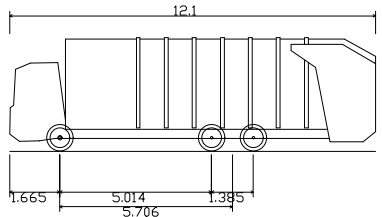

Hertfordshire 12m Refuse
Overall Length 12.100m
Overall Width 2.500m
Min Body Height 2.700m
Track Width 2.530m
Lock to lock time 4.00s
Wall to wall Turning Radius 11.400m

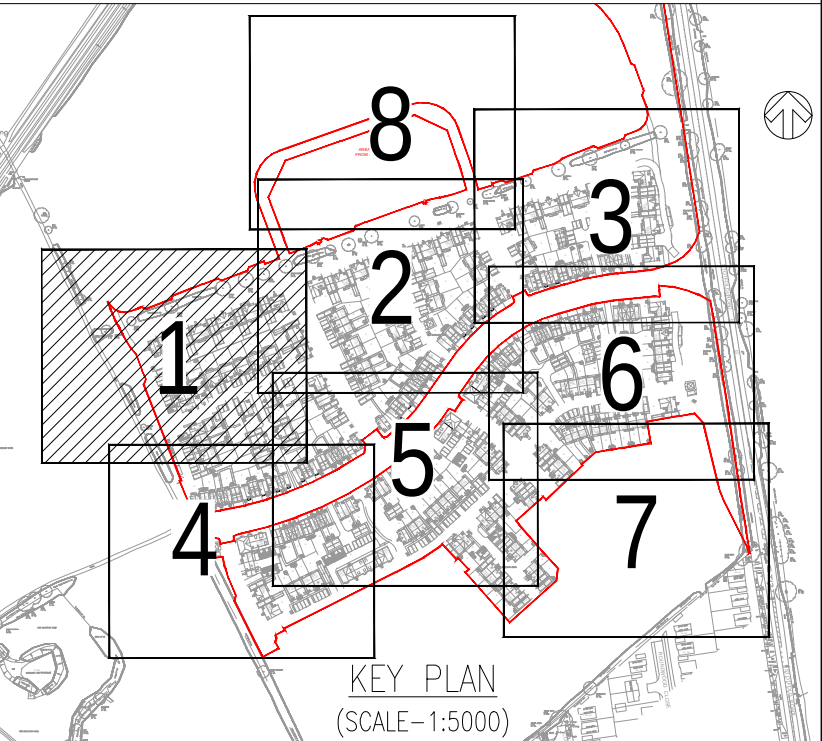

0 12.5 metres					
P04	20/02/2026	JN	UPDATED TO SUIT REVISED MASTERPLAN	TP	TP
P03	27/10/2025	SM	UPDATED TO SUIT REVISED MASTERPLAN	DSB	TP
P03	27/10/2025	SM	UPDATED TO SUIT REVISED MASTERPLAN	DSB	TP
P02	06/06/2025	DSB	MASTERPLAN UPDATED	DSB	LIM
P01	14/10/2024	MH	FIRST ISSUE	DSB	LIM
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS: S2 - FOR INFORMATION

Unit 9 The Chase, John Tate Road, Foxholes Business Park, Hertford, SG13 7NN, UK
T+ 44 (0) 1992 526 000, F+ 44 (0) 1992 526 001
wsp.com

CLIENT: BARRATT DAVID WILSON HOMES

ARCHITECT: MCBAINS

SITE/PROJECT: HIGHOVER FARM, HITCHIN

TITLE: PHASE 1
REFUSE TRACKING
SHEET 1 OF 8

SCALE @ A1: 1:250	CHECKED: TP	APPROVED: TP
PROJECT NO: 700982227	DESIGNED: RH	DRAWN: RH
		DATE: February 26

DRAWING NO: HOF-WSP-ZZ-PH1-DR-C-1551

REV: P04

© WSP UK Ltd