

Axyl Echo

96801250 AXYL ECHO S 4L 930 WB HF BK

THORN

LED 8W AX_ECH_S_4L930WB	UK CA	IP65	IK06	⏚	CE	⚠	
-------------------------	----------	------	------	---	----	---	--


Axyl Echo

Axyl Echo, a wall mounted, LED luminaire for decorative facade lighting, with wide beam distribution. Class I electrical.. Fixed output LED driver. IP65, Impact strength: IK06. Housing: Die-cast aluminium, powder coated textured black. Working ambient temperature: -20°C to +40°C. Complete with 3000K LED..


Dimensions: 110 x 110 x 110 mm
Luminaire input power: 7.7 W
Luminaire luminous flux: 378 lm
Luminaire efficacy: 49 lm/W
Weight: 1.47 kg



TLG_AXYL_F_ECHO_S_4L_HF_BK.jpg

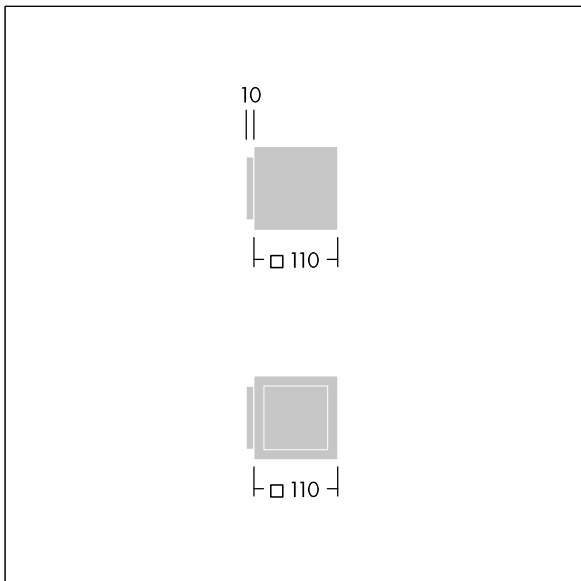

TLG_AXYL_M_ECHO_S.wmf

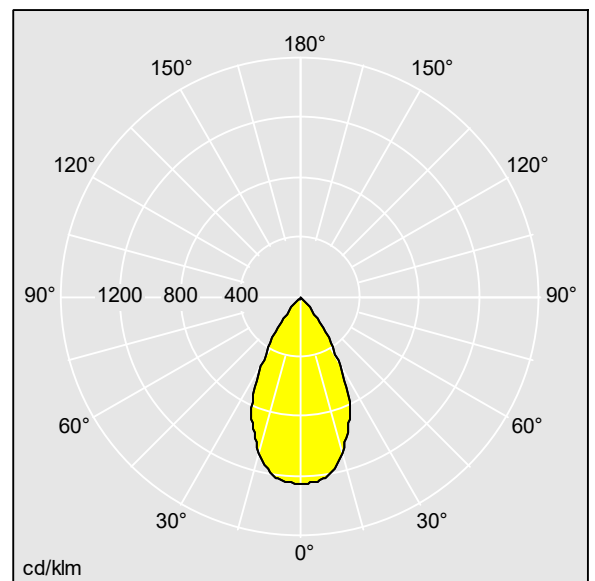

AXYL_ECHO_S_4L_930_WB.idt

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 378 lm
Luminaire efficacy*: 49 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 1x LED_DRV
Luminaire input power*: 7.7 W Power factor = 0.97
Control: FIX
Maintenance category CIE 97: E - Dust-proof IP5X

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C. Risk group

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting