


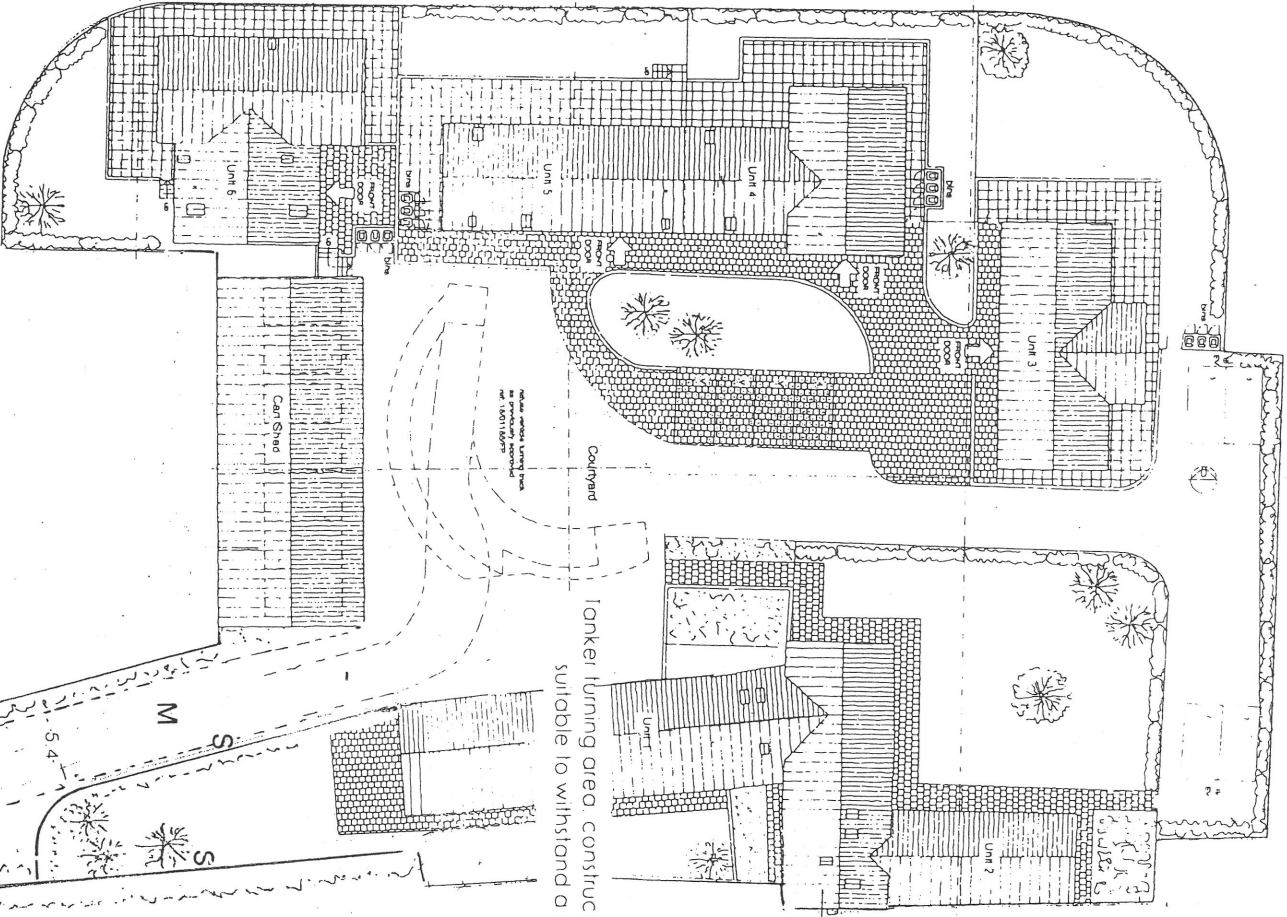

Linker turning area construction build up to be suitable to withstand a fully laden linker

U - AREAS TO BE TURFED

Existing Hedgerow Retained

CARRIAGEWAY TO BE 300mm GRANULAR TYPE 1 CONSTRUCTION WHICH WOULD NEED A FULL COMPACTION REGIME TO BIND LAYERS

- L Roadway, first 15.m asphalt finish
- M Main Roadway and Courtyard, permeable asphalt surface with rolled-in pea-shingle finish
- S Fences, 1.2m high three bar timber paddock fencing

U Refuse Collection Point with asphalt surface

VISIBILITY SPLAY
2.4m x 43m

VEGETATION TO BE TRIMMED BACK FROM VISIBILITY SPLAY

VISIBILITY SPLAY
2.4m x 43m

B HEDGE PLANTING

- 1 Mixed hedge comprising
 - 50% *Crataegus monogyna* (Hawthorn)
 - 20% *Carpinus betulus* (Hornbeam)
 - 20% *Prunus spinosa* (Plum)
 - 10% *Ligustrum vulgare* (Privet)
 - 2 Single species hedge
 - Fagus sylvatica* (Beech)
- 90cm cell grown plants planted 3 per linear metre in two rows with species groups of three
- Double row planting height 1.0m at 50cm spacing



SCALE 1 : 500 AT A3 SHEET

