

Silent box fan unit AMF-560/1

Version: 4-pol; 50 Hz; 90°-180°airflow



Silent box fan unit AMF-560/1

Variable direction discharge, backward curved centrifugal fan.

High efficiency IE2 external rotors motor and IE3 for induction rotor motors. Highest quality Electric motors with thermal protection will guarantee the long life and trouble free operation due to its construction and air cool system.

Free running High density HD backward curved Impeller is made of aluminium and dynamically balanced according to ISO10816 two plane CLASS 1.

The double skin Acoustic panels with 25 mm flame-retardant mineral wool noise and temperature insulated will help to reduce the noise level, they are easily removable which make it easy to install in any direction as well as easy to clean and maintain.

Aluminium frame and corners are highly shock-resistant.

Speed controllable 0 to 100% only by High efficiency variable frequency drive, pre-programmed and fully protecting the fan against any sort of harm.

Low sound level due to the 25mm thick acoustic panels, to absorb the noise to the highest level.

Casing and all corners are made of corrosion resistance aluminium for longer life.

Silent box fans can be used as extract and supply unit

Technical Data

Voltage	230V
Frequency	50 Hz
Phase(s)	3~
Input power	2000 W
Input current	8.0 A
Impeller speed	1450 r.p.m.
Efficiency	IE 2
Air flow max	11130 m³/h
Maximum ambient Temperature	max 60 °C
Enclosure class	IP54
Insulation class	F
Motor type	AC
Weights	Weight 93 kg


Speed control Data

Principle of control	Variable frequency Drive
Input voltage	1~ 200-240V
Input current	19.2 A
Output current	8.0 A
Output voltage	3~ 0-250V
Frequency	0 – 50 Hz
Enclosure class	IP20


Mechanical charactistic

Name	V m³/h	Δp sV Pa	Δp tV Pa	Pwe W	η s %	Lp(A) dB(A)	n 1/min	ErP
AMF-560/1	11130	8	75	2000	1,6	86,6	1450	2018

Air volume flow rate

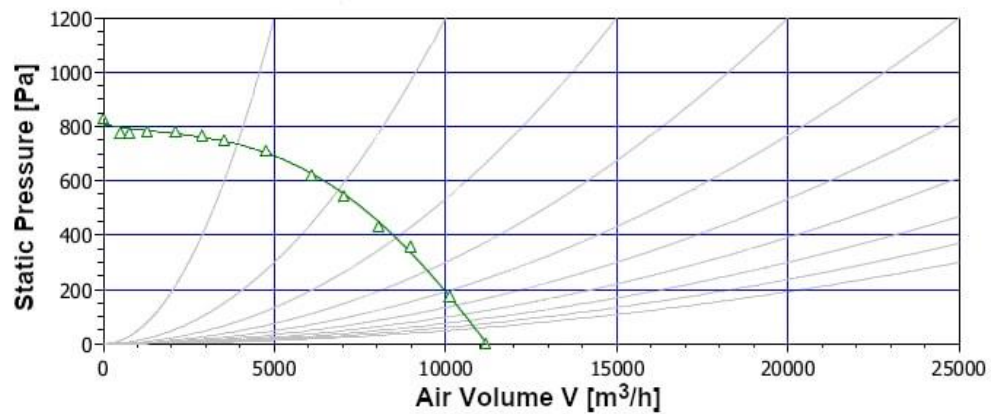

Dimensions

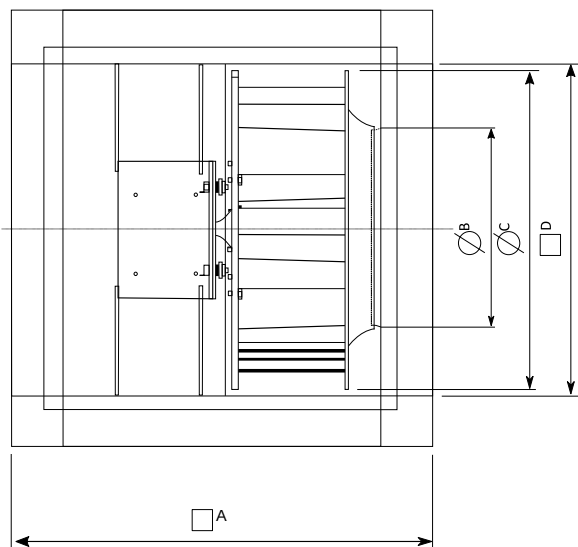

□ A	=	800 mm
□ B	=	330 mm
□ C	=	560 mm
□ D	=	720 mm

Sound data

Δp_{stat} . Pa

500/4	Hz	Tot	125	250	500	1k	2k	4k	8k
LwA Case breakout	dB (A)	59	59	59	43	45	41	38	32
LwA Inlet	dB (A)	72	52	51	64	69	65	59	50
LwA Outlet	dB (A)	76	57	69	70	70	69	65	56

$\rho = 1.20 \text{ kg/m}^3$

Principle of control and protection:

Fully programmed and wired up ready to use inverters are the way we control the speed of our fans, Inverters are by far the best way to control the speed of fans, by using inverters you have the benefits of :

- High efficiency energy saving
- 0 to 100% controlling speed
- Fully protection of the fan



Speed control Data

Principle of control	Variable frequency Drive
Input voltage	1~ 200-240V
Input current	15 A
Output current	8 A
Output voltage	3~ 0-250V
Frequency	0 – 50 Hz
Enclosure class	IP20