


Notes

1. Recently consented Garden Room addition and landscape adjustments
2. Existing modern spiral stair removed and existing courtyard garden walls raised / rebuilt in matching gault brickwork to form new single storey enclosure to courtyard and two storey gabled addition of traditional construction housing new stair and lift.
3. New minimally metal framed fixed glazing with concealed service door access (for maintenance) around new light well
4. New Gault brick finish to addition to carefully match existing brickwork, mortar and pointing. Existing string course to service wing extended into new brickwork.
5. New traditional timber framed sash window with profiles to match existing adjacent. New glazing to be double glazed 'slim-lite' units. New sills and architraves to match existing to service wing.
6. New traditional timber framed casement windows. New glazing to be double glazed 'slim-lite' units. New sills and architraves to match existing to service wing.
7. New opening formed with traditional gauged brickwork lintel to match existing adjacent and new traditional glazed double doors installed to match pane proportions to existing windows to west elevation of service wing. Glazing units to be double glazed 'slim-lite' units to enable matching glazing beads.
8. New gabled roof finished in traditional slate to match existing adjacent
9. New single ply roof and gutters laid to minimal pitches on heavily insulated substrate with sedum planted top. (concealed from view)
10. Cast iron rainwater goods adjusted to suit new roofs and underground drainage
11. New cast iron hopper and downpipe to new flat roof
12. New cast iron gutters and downpipes to addition to match existing
13. New fixed timber framed window to existing opening in brickwork
14. Traditional header course brick coping to raised walls
15. Painted timber barge boards to gable to match existing adjacent
16. New stair with glazed balustrade and metal handrails
17. Future open car platform lift location (enclosure to match glazed balustrade)
18. Existing Courtyard wall rebuilt, wall re-aligned to match service wing
19. Existing sash window to become internal and made 'blind' with reversible lining to bedroom side
20. Existing doors and openings retained and overhauled as internalised doors
21. Existing timber door and frame removed to store and opening raised and widened with traditional gauged arch and reveal details to match existing. Internal plaster and joinery finishes to be made good to match existing.
22. Existing timber door and frame realigned with traditional gauged arch and reveal details to match existing. Existing door and frame to be re-used and internal plaster and joinery finishes to be made good to match existing.
23. Existing modern metal gate to be removed and opening realigned and raised with traditional gauged arch and reveal details to match existing. New traditional glazed double doors installed to match pane proportions to existing doors to Dairy. Glazing units to be double glazed 'slim-lite' units to enable matching glazing beads.
24. Existing courtyard flooring removed to enable installation of new insulated floor slab with UFH. Level change between existing door openings to be accommodated through minor grading of new floor. New York flag stone floor finish to utilise salvaged materials where possible.
25. New section of stone stair between dairy and courtyard to suit enlarged opening and courtyard floor level
26. New external York stone steps to suit adjusted levels and alignment, utilising salvaged material if possible
27. Pitched internal ceilings to optimise ceiling height
28. Traditional painted plaster finish to walls and ceilings internally.
29. Existing Boot room floor re-laid to falls to provide step free access to Utility Link.

Utility Link Refer to Dr. No's
CDH-BMD-Z1-XX-DR-A-18160 - 18164

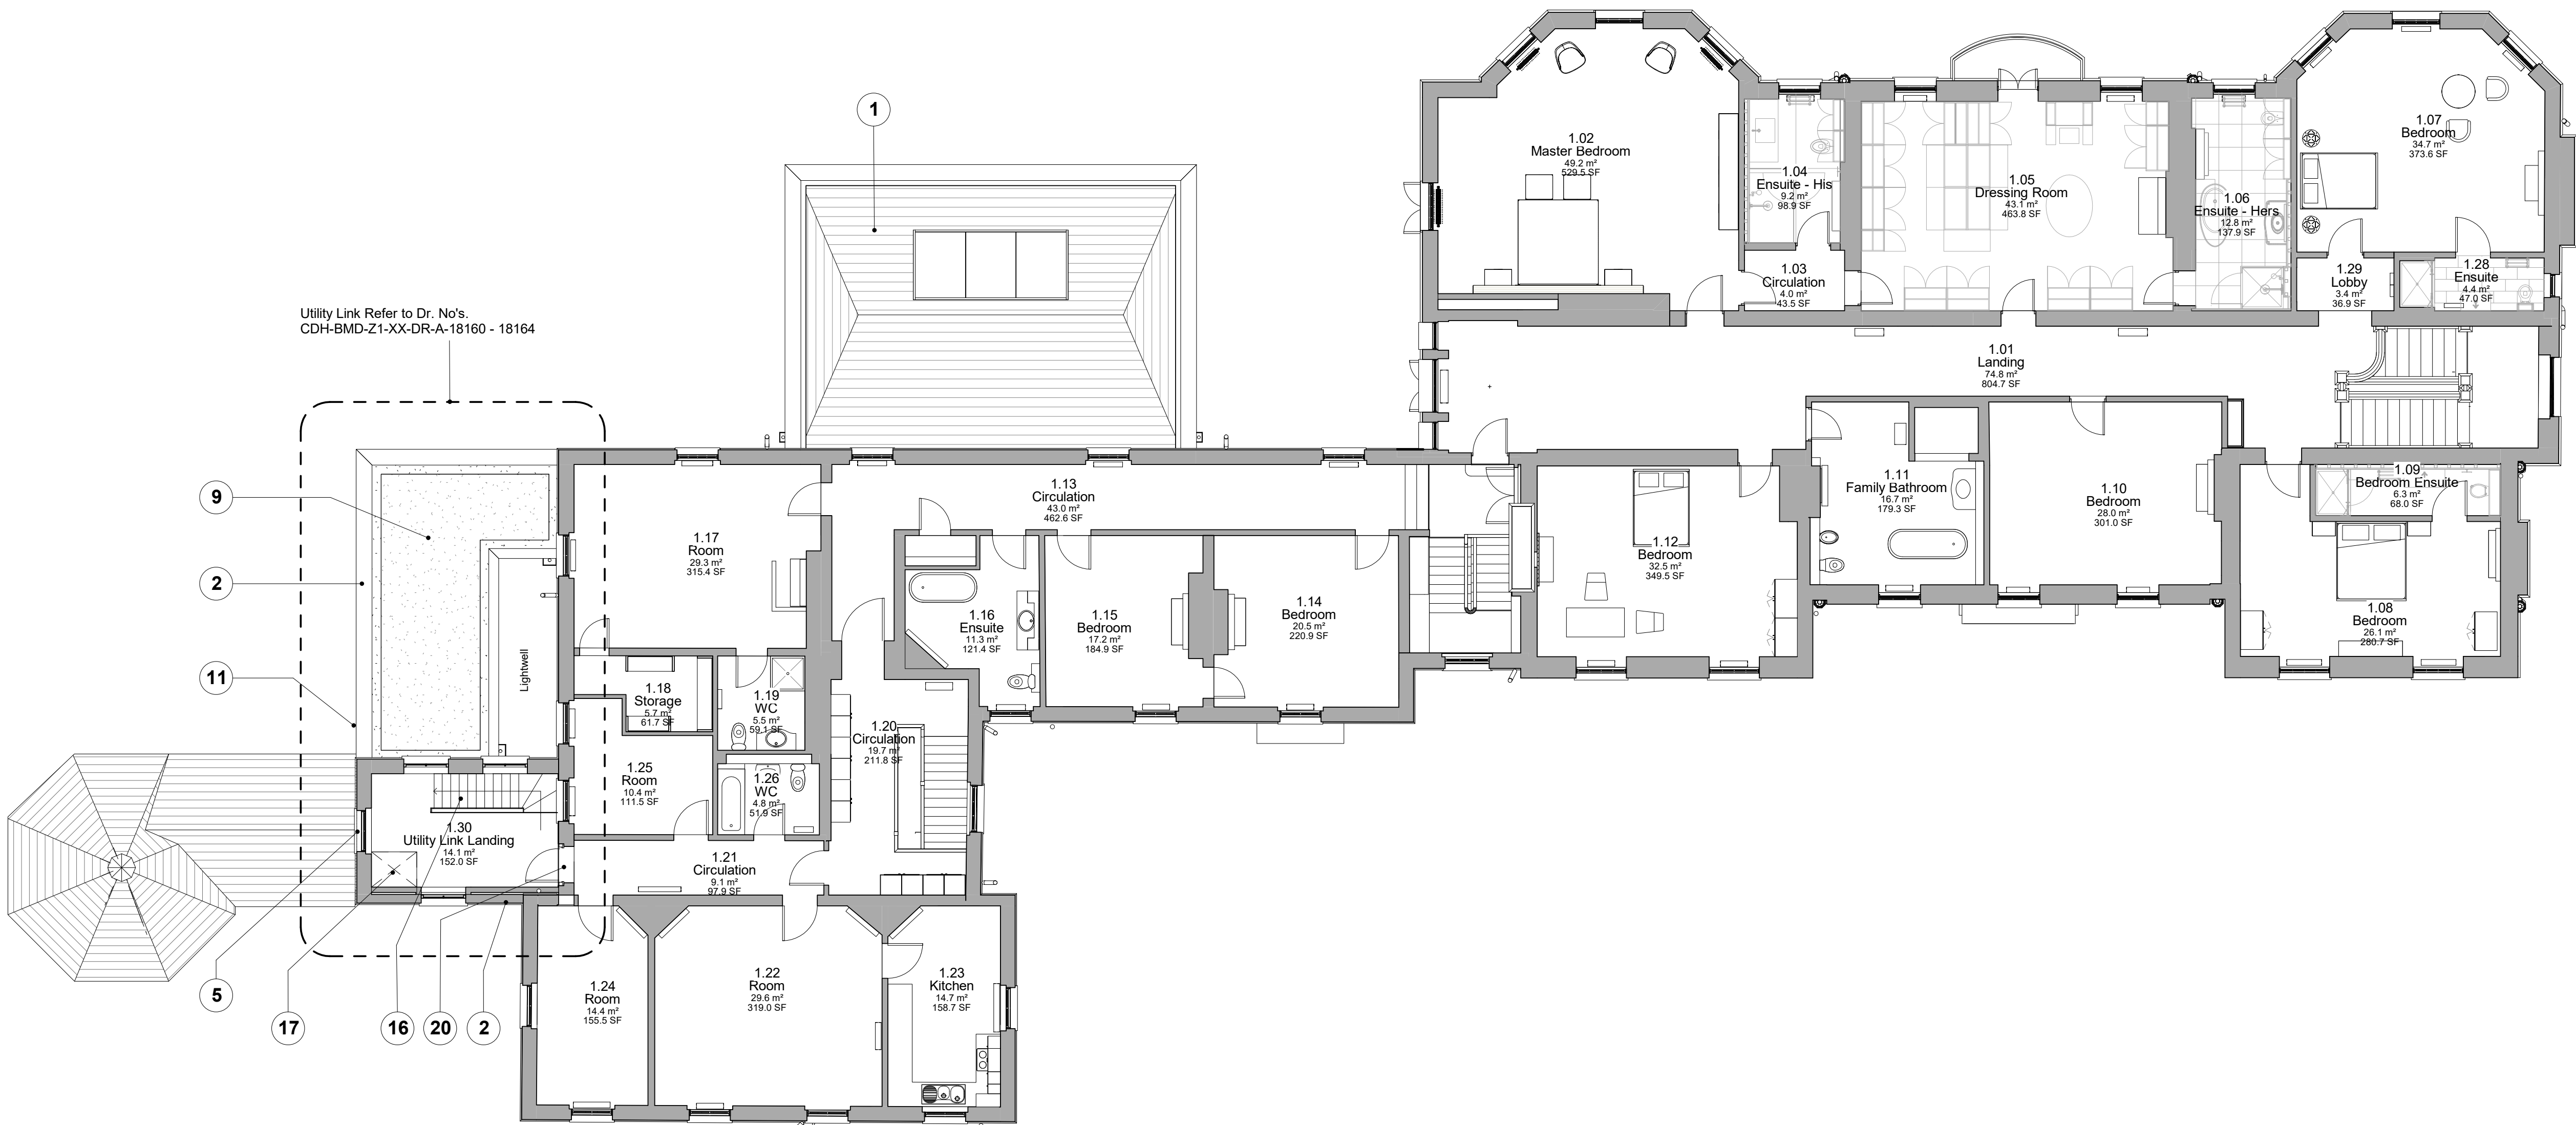

1 1st Floor - Phase 2B Plan
1 : 100

AS CONSENTED

Suitability Code (as defined in BS1192)

Work in Progress (WIP)

S0 - Work In Progress

Shared (Non-Contractual)

S1 - Suitable for Co-ordination
S3 - Suitable for Review & comment
S5 - Not Used
S7 - Suitable for AIM Authorisation

WIP to Published (Non-Contractual)

D1 - Suitable for Costing
D3 - Suitable for Contractor Design

S2 - Suitable for Information
S4 - Suitable for Stage Approval
S6 - Suitable for PIM Authorisation



Published Documentation (Contractual)

A1, A2, A3, Etc - Approved and accepted as stage complete
B1,B2,B3, Etc, - Partially signed off with minor comments from the Client

Published for AIM Acceptance

CR - As Construction Record Documentation

rev by chkd date description

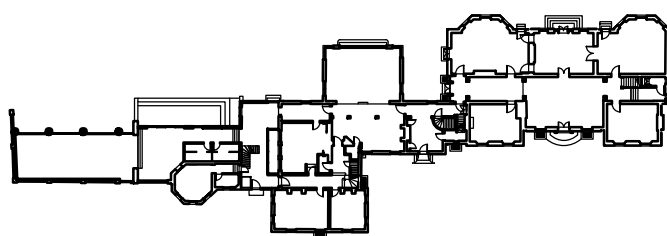

MFA / Malcolm Fryer Architects

bam
BAM Design Ltd
An operating company of
BAM Construct UK Ltd
Architecture
Interior Design
3D Visualisation
Feasibility Studies
Structural Engineering
Environmental Services
Building Information Modelling
Centrium Business Park
Griffins Way, St Albans
Hertfordshire, AL1 2PD
01727 884200
design@bam.co.uk
www.bam.co.uk

project Codicote House

title Phase 2B - First Floor Plan

purpose of issue

scale	As indicated @ A1	drawn	Author	BAM job no.	4498	drg. status
date	06/03/19	checked	Checker			
project code	CDH- BMD-	originator	volume	level	type	role number rev.
drg / doc ref						A- 11138