


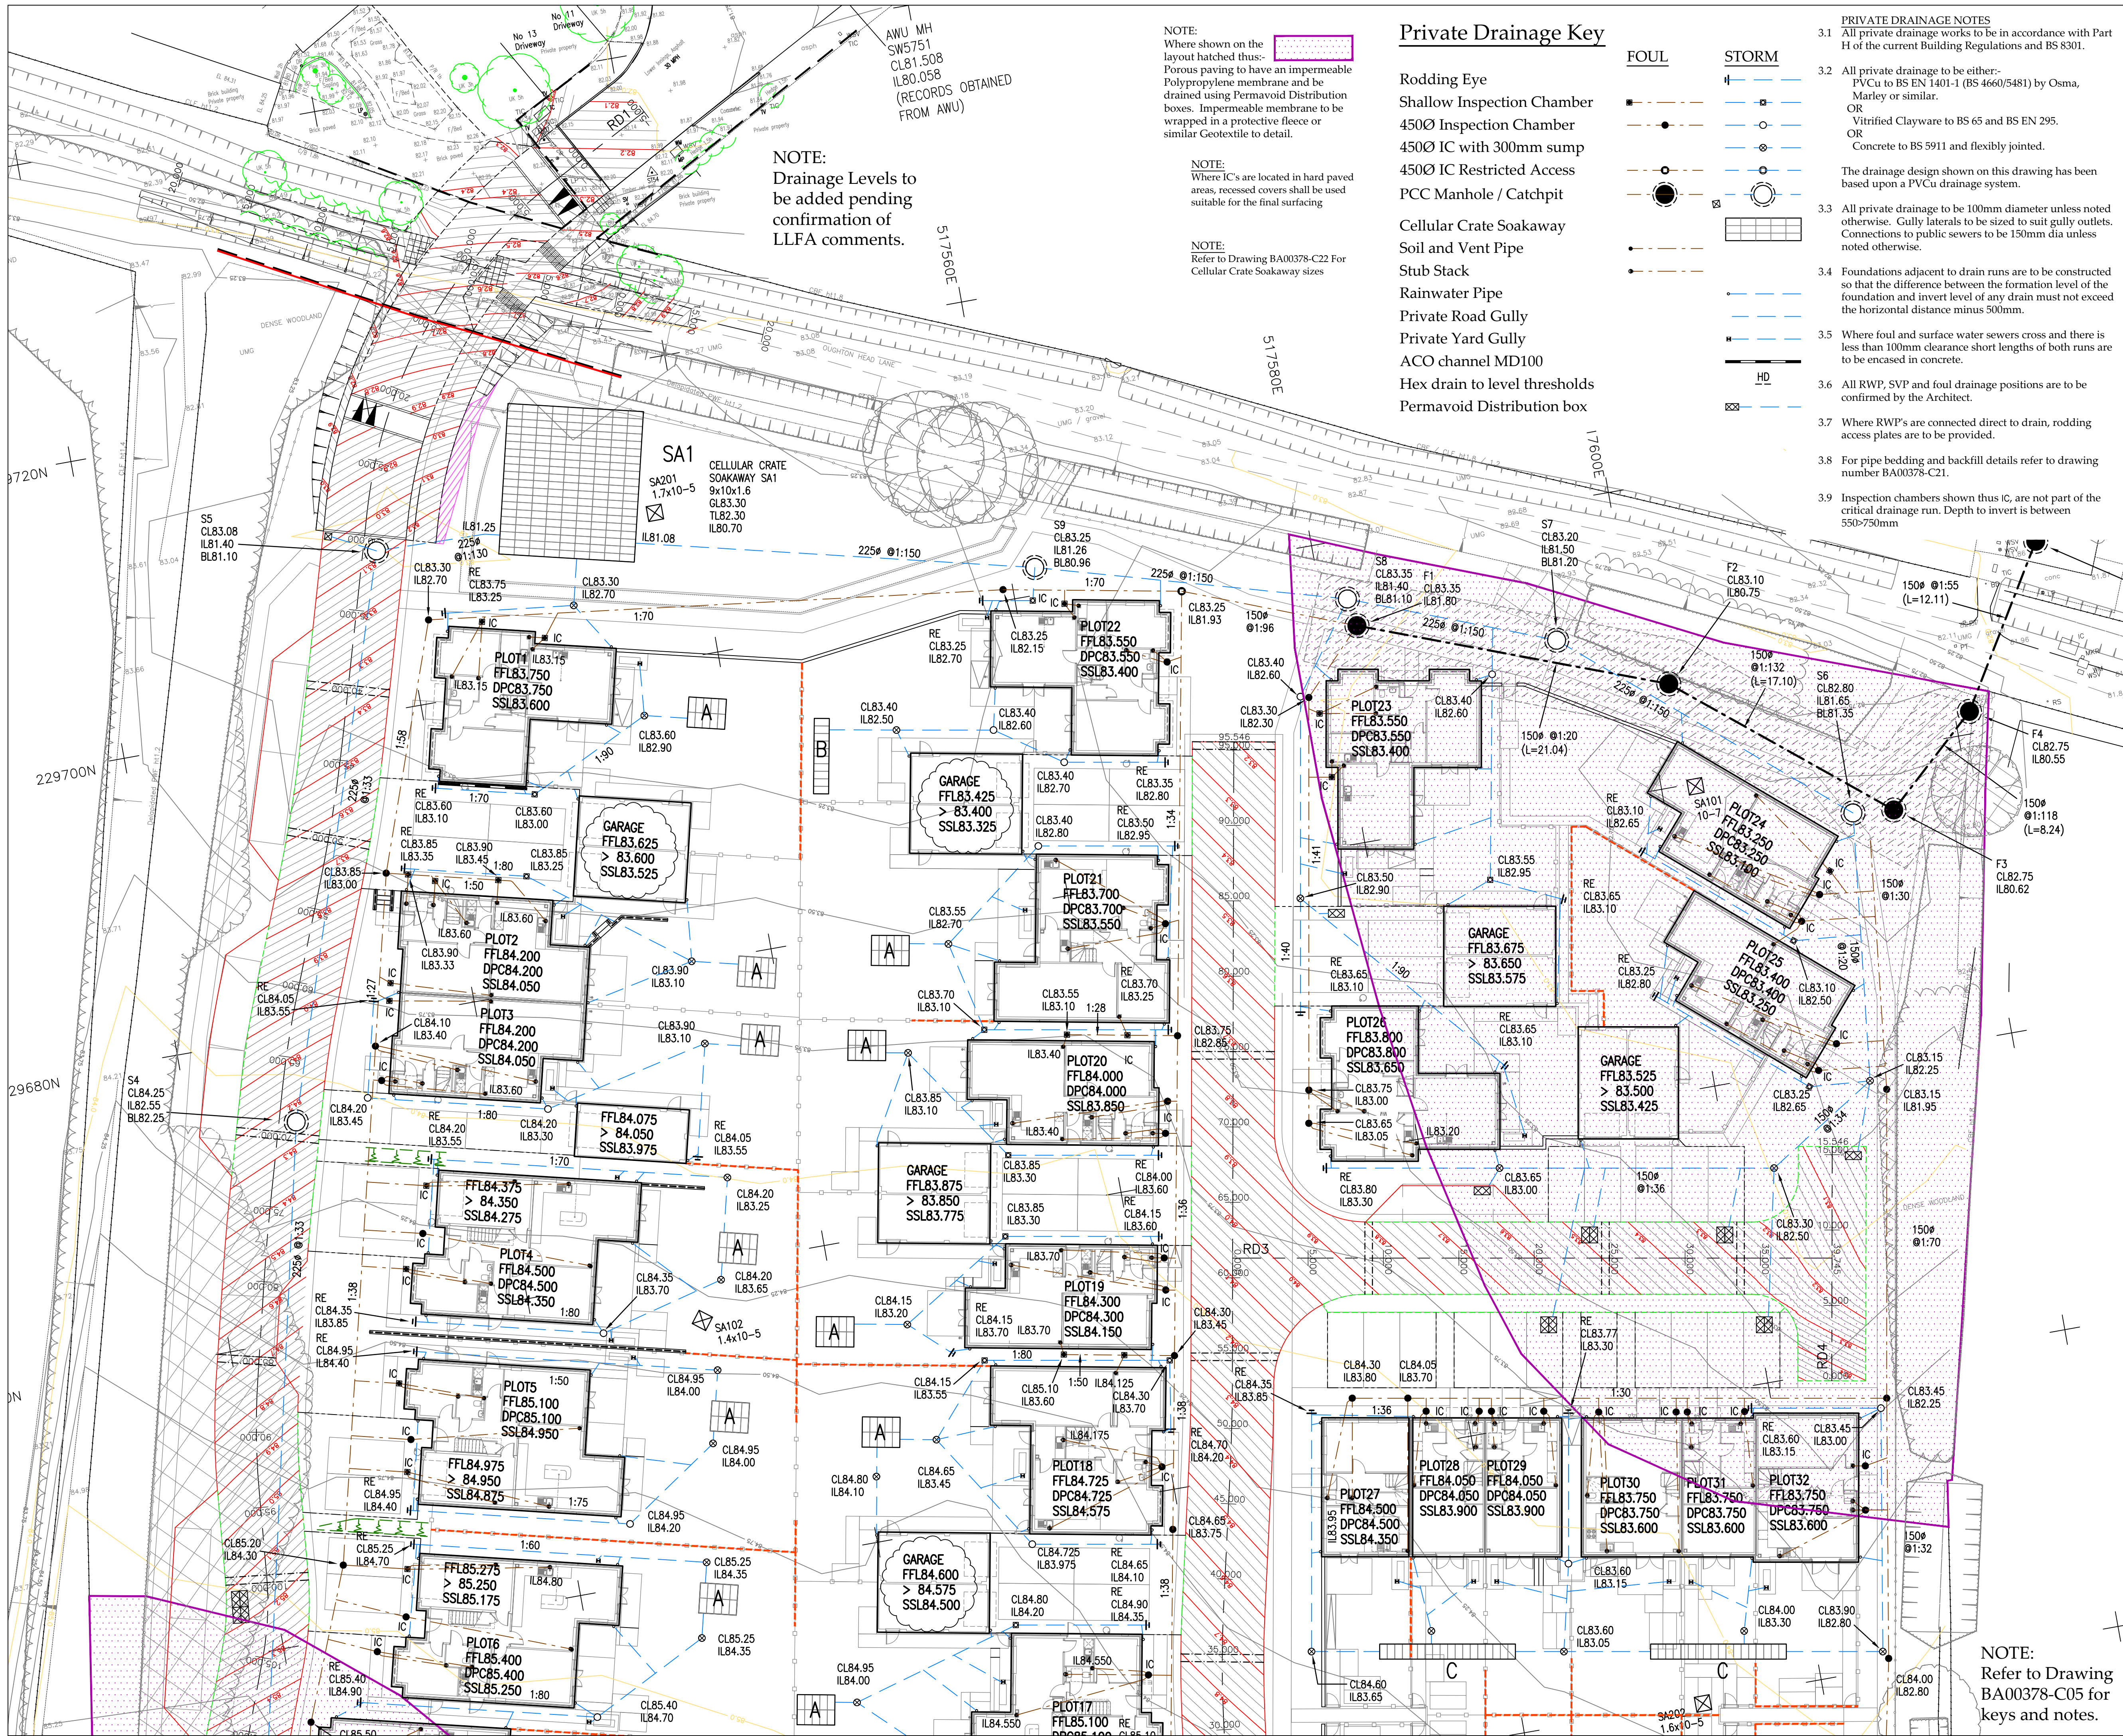


NOTE:
Where shown on the layout hatched thus:
Porous paving to have an impermeable Polypropylene membrane and be drained using Permavoid Distribution boxes. Impermeable membrane to be wrapped in a protective fleece or similar Geotextile to detail.

NOTE:
Where IC's are located in hard paved areas, recessed covers shall be used suitable for the final surfacing

NOTE:
Refer to Drawing BA00378-C22 For Cellular Crate Soakaway sizes

Private Drainage Key

Rodding Eye
Shallow Inspection Chamber
450Ø Inspection Chamber
450Ø IC with 300mm sump
450Ø IC Restricted Access
PCC Manhole / Catchpit
Cellular Crate Soakaway
Soil and Vent Pipe
Stub Stack
Rainwater Pipe
Private Road Gully
Private Yard Gully
ACO channel MD100
Hex drain to level thresholds
Permavoid Distribution box

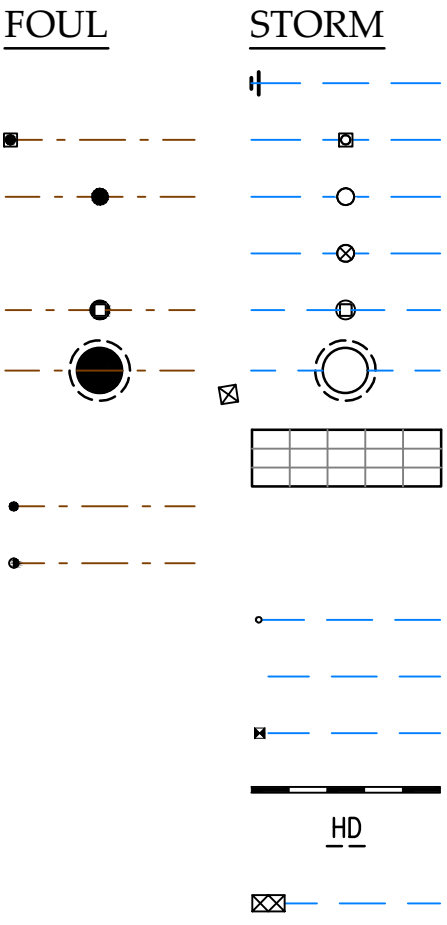

PRIVATE DRAINAGE NOTES

3.1 All private drainage works to be in accordance with Part H of the current Building Regulations and BS 8301.

3.2 All private drainage to be either:
PVCu to BS EN 1401-1 (BS 4660/5481) by Osma, Marley or similar.
OR
Vitrified Clayware to BS 65 and BS EN 295.
OR
Concrete to BS 5911 and flexibly jointed.

The drainage design shown on this drawing has been based upon a PVCu drainage system.

3.3 All private drainage to be 100mm diameter unless noted otherwise. Gully laterals to be sized to suit gully outlets. Connections to public sewers to be 150mm dia unless noted otherwise.

3.4 Foundations adjacent to drain runs are to be constructed so that the difference between the formation level of the foundation and invert level of any drain must not exceed the horizontal distance minus 500mm.

3.5 Where foul and surface water sewers cross and there is less than 100mm clearance short lengths of both runs are to be encased in concrete.

3.6 All RWP, SVP and foul drainage positions are to be confirmed by the Architect.

3.7 Where RWP's are connected direct to drain, rodding access plates are to be provided.

3.8 For pipe bedding and backfill details refer to drawing number BA00378-C21.

3.9 Inspection chambers shown thus IC, are not part of the critical drainage run. Depth to invert is between 550>750mm

- Notes:**
- 1.1 Do not scale from this drawing.
 - 1.2 All dimensions are in m unless otherwise specified.
 - 1.3 In case of any discrepancies in drawings or details refer to engineer for clarification. Unilateral decisions by the contractor will not be accepted.
 - 1.4 This drawing is to be read in conjunction with all related Architects, Consultants & Sub-Contractors drawings and specifications.
 - 1.5 The Contractor is to ensure that all design drawings and information are read concurrently and any discrepancies or omissions reported directly to Aventus Design.
 - 1.6 This drawing is based upon the survey by Mark Beaver Surveying, reference 1021/03A dated 8th December 2022 provided in digital format.
 - 1.7 Level datum of survey relate to OSGB36(02).
 - 1.8 The grid relates to Ordnance Survey.
 - 1.9 The Contractor must check the levels of all existing drainage outfalls prior to construction of any drainage, unless otherwise agreed, to ensure the proposed design may be achieved. Any discrepancies must be reported immediately to Aventus Design.
 - 1.10 Sulphates have been determined as class 1 (DS-1) for design purposes in accordance with BRE Special Digest 1 (2001). Buried Concrete to be in accordance with ACEC Site Class AC-1.
 - 1.11 All external building dimensions are to be checked against the Architects drawings prior to any construction commencing.
 - 1.12 All adoptable highway works to be in accordance with the Local Authorities Specifications.
 - 1.13 All adoptable drainage works to be in accordance with the Water Authorities standard guidelines for connections etc.
 - 1.14 Formation to road/hardstanding to be proof rolled and any soft spots in subgrade of road/hardstanding areas are to be excavated and replaced with well compacted sub-base or free draining granular material to Department of Transport Specification for Highway Works Part 2 Table 6/1 Class 1 (General Granular Fill) and compacted in accordance with Table 6/4.

CDM REGULATIONS 2015
Aventus Design have considered and where reasonably practicable avoided foreseeable risks in the preparation of the design shown on this and related drawings. Significant risks which remain and associated control measures are identified in the Risk Register and should be given particular attention by the main contractor on site.

RISK NUMBERS 6 - 9 on Risk Register
NOTE: The Risk Register records only those elements considered unusual, difficult to manage or outside the anticipated expertise of a competent contractor.

Drawing Status: **PRELIMINARY ISSUE**



C	24.04.25	F2-F5 amended.	CU	-
B	21.02.24	Gully to S278 areas added, SA1 resized, gully to ASHP & SS&F3 amended.	SU	-
A	01.12.23	Layout updated, Substation removed. Private drainage & soakaways amended.	SU	-
REV.	DATE	DESCRIPTION	CHK	APP

Aventus Design Ltd
Unit 5 - Leaches Farm
Business Centre
Bicester Road
Kingswood
Aylesbury
Bucks HP18 0RF
Tel: 01296 770066
Email: mail@aventsdesign.co.uk
Web: www.aventsdesign.co.uk

Client: **Cala Homes**
Site: **Oughtonhead Lane, Hitchin, Herts. SG5 2NA**

Title: **Site Layout & Drainage 1 of 2**
Drawing no. **BA00378-C06** Aventus Ref. **H1402**
Issue: **C** Scale: **1:200 @ A1** Checked: **-** Date: **-**
Dwn: **S.U.** Date: **Oct 23** Approve: **-** Date: **-**

NOTE:
Refer to Drawing BA00378-C05 for keys and notes.