


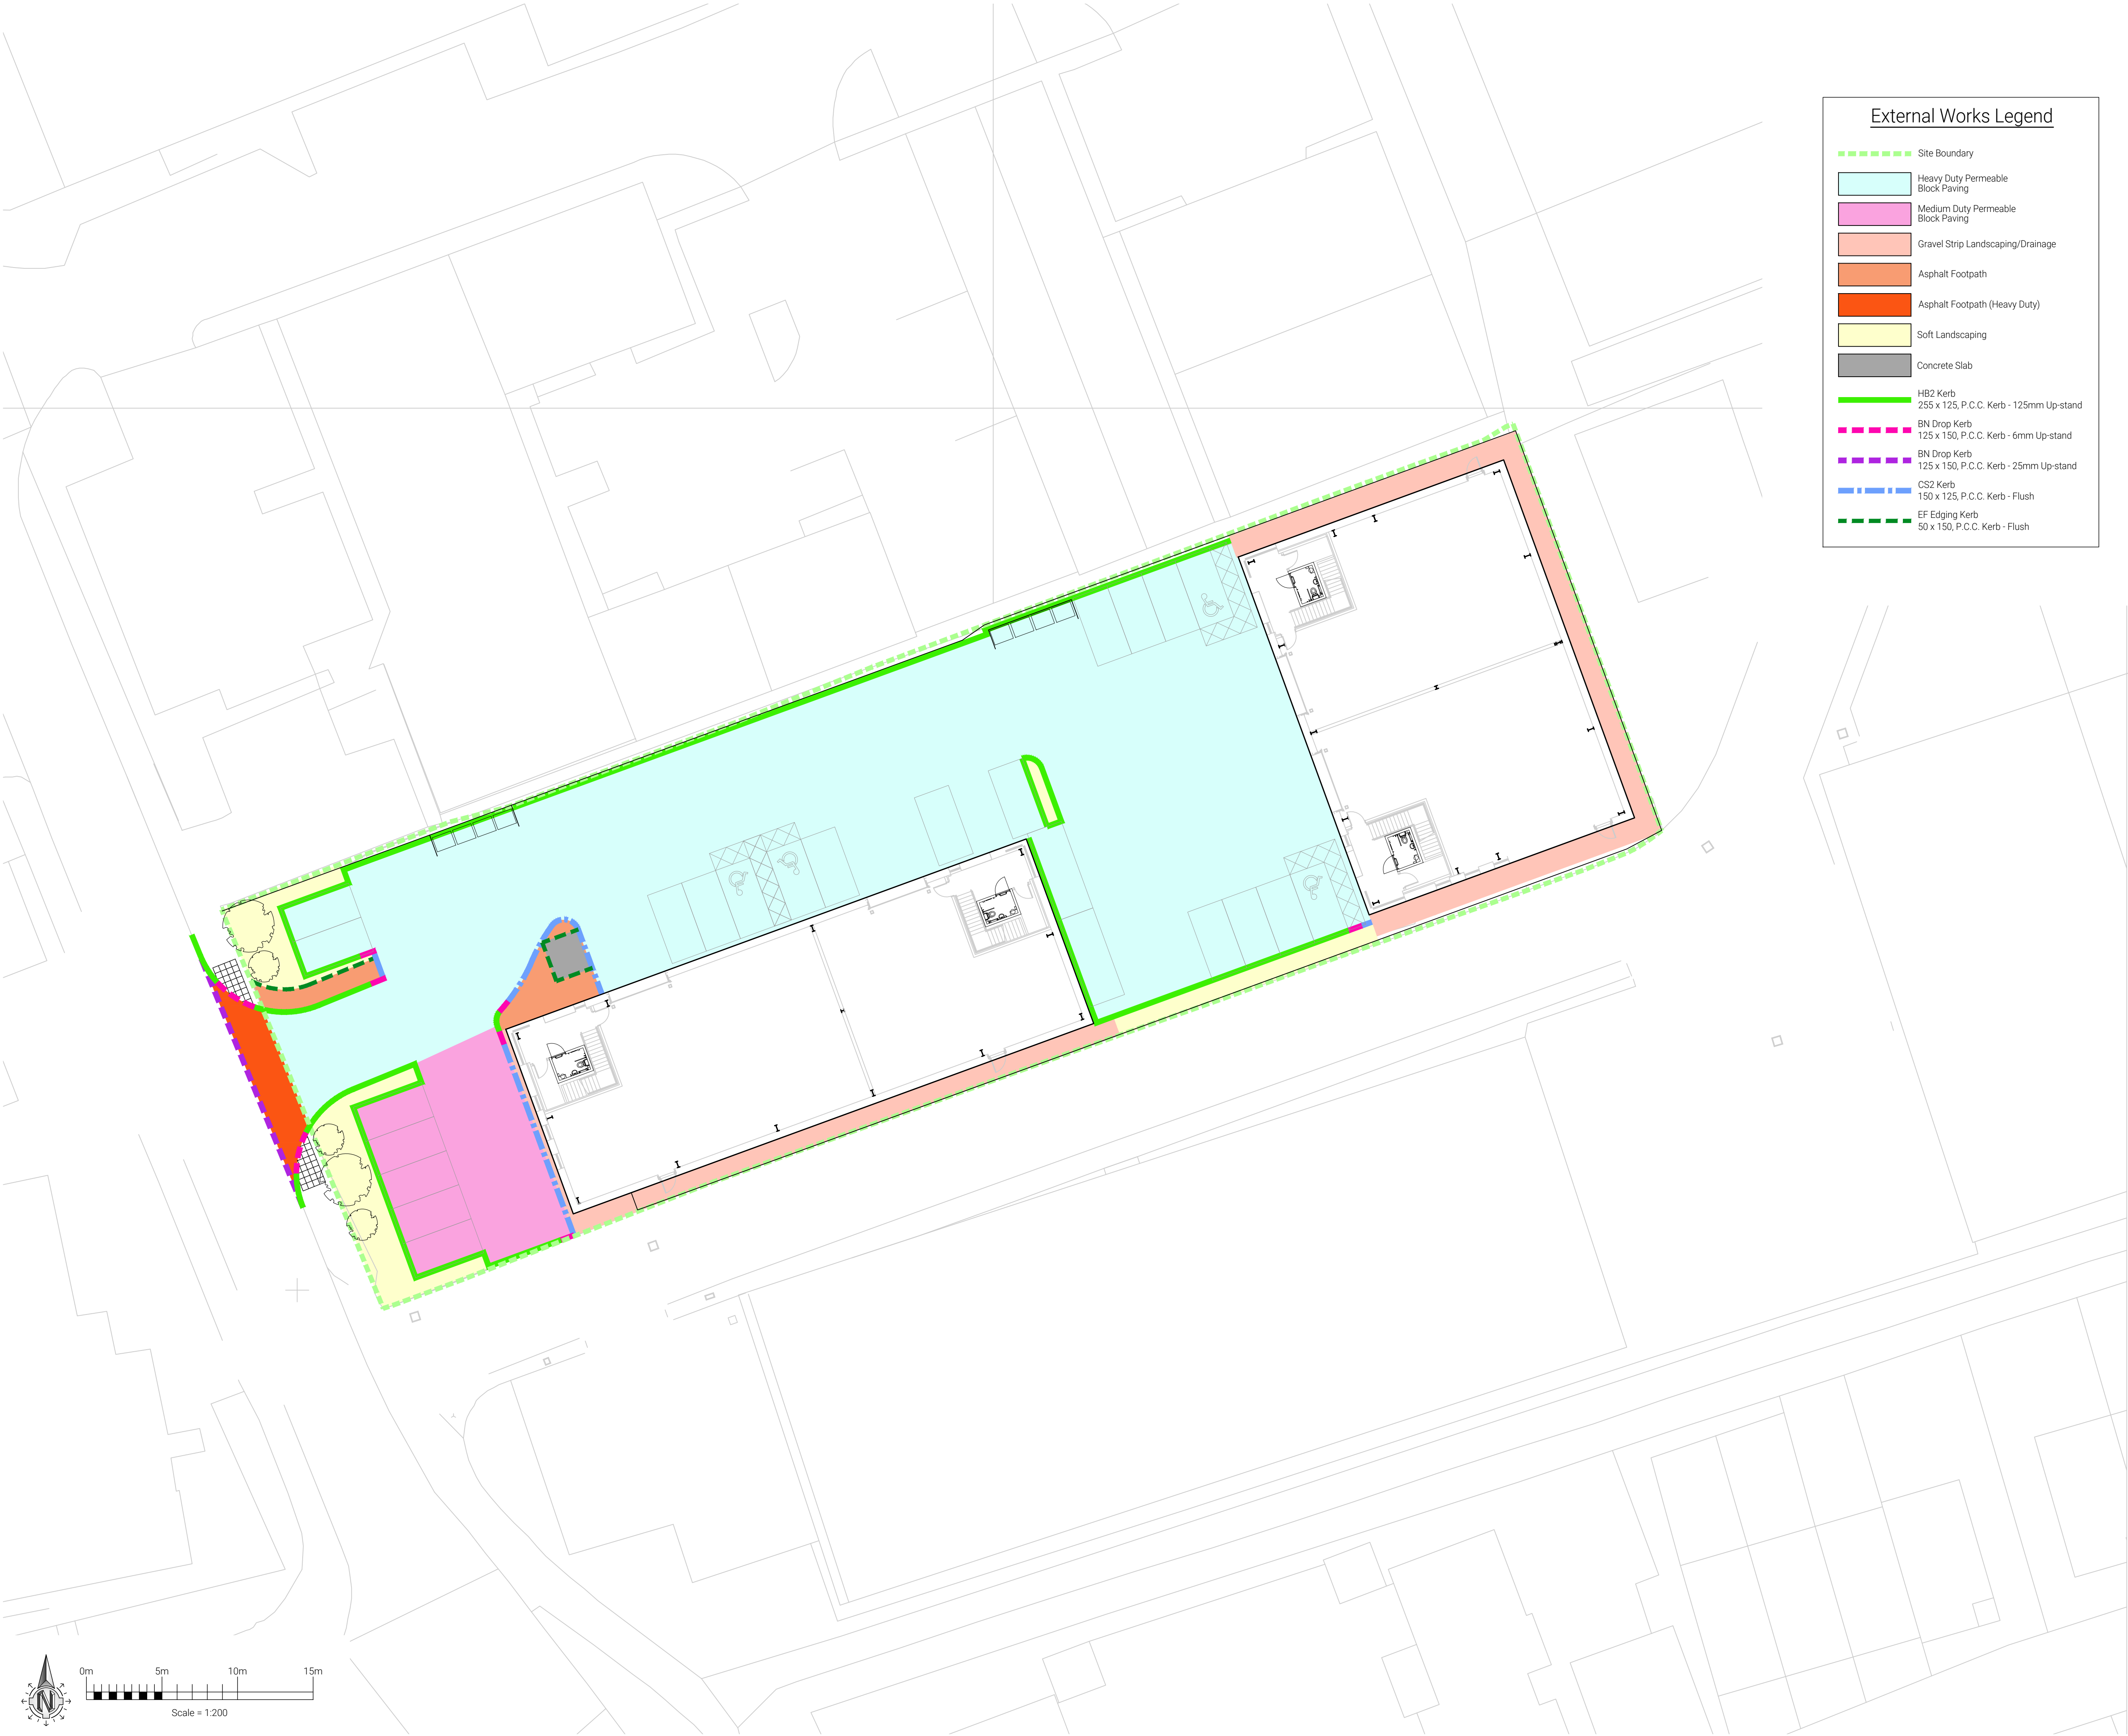

External Works Legend

Site Boundary

Heavy Duty Permeable Block Paving

Medium Duty Permeable Block Paving

Gravel Strip Landscaping/Drainage

Asphalt Footpath

Asphalt Footpath (Heavy Duty)

Soft Landscaping

Concrete Slab

HB2 Kerb
255 x 125, P.C.C. Kerb - 125mm Up-stand


BN Drop Kerb
125 x 150, P.C.C. Kerb - 6mm Up-stand

BN Drop Kerb
125 x 150, P.C.C. Kerb - 25mm Up-stand

CS2 Kerb
150 x 125, P.C.C. Kerb - Flush

EF Edging Kerb
50 x 150, P.C.C. Kerb - Flush

- Notes:
- This drawing is to be read in conjunction with all relevant architects, engineers and specialist sub-contractors drawings and the specification.
 - All setting out to be in accordance with the architects drawings. Any discrepancies between the engineers and the architects drawings to be referred to the architect before proceeding. Dimensions must not be scaled.
 - Capping layer material to be in accordance with the Highway Authority 'Specification for Highway Works' table 6/1, 6/2 and 6/4. contractor to provide certificates to confirm compliance.
 - Well graded crushed material to be clean and free of plastic, metal, plaster etc, passing a 75mm screen on compacting plant and graded to have a uniformity coefficient greater than 10. contractor to provide certificates to confirm compliance.
 - Contractor to allow for all works on the public highway to be in accordance with the local Highway Authority requirements. contractor to allow for applying for all 'road opening licence's' and paying all necessary fees.
 - Reinforcement to be to BS 4449, 4483 and 6744. Cutting and bending to BS 8666.
 - All precast concrete kerbs, channels, edgings and quadrants to be manufactured and laid in accordance with BS EN 1340 - 2003.
 - All pavements constructed with concrete, clay or natural stone pavers to be in accordance with BS 7533 all relevant parts.
 - Concrete block pavers including permeable blocks to be in accordance with BS EN 1388.
 - Sand bedding layer to pavers to be in accordance with the table in BS 7533-3 annex D. All pavers to be laid and compacted in accordance with all relevant parts of BS 7533.
 - Unless specified elsewhere all pavers will be laid in a 45° herringbone pattern.
 - Block paving immediately adjacent to features like drainage channels to be fixed in place using epoxy mortar minimum 14mm thick.
 - Contractor to allow for saw cutting all joints where new works extend into existing highway construction. Allow for painting of joints with bitumen emulsion reinstatement of chase all in accordance with highway authority requirements.
 - Preformed internal and external angle kerbs to be used where appropriate, mitring of kerbs is not acceptable

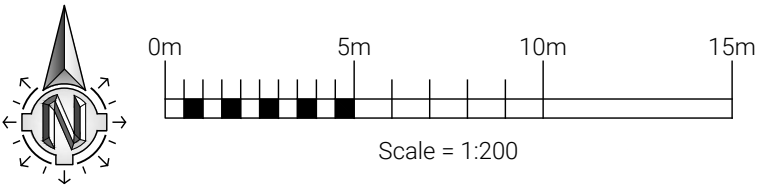

P2	16.12.24	Issued for planning
P1	14.11.24	Preliminary Issue
Rev.	Date	Description

Calcinotto
First Floor South
Waterloo House
Fleets Corner
Poole BH17 0HL

01202 237237
info@calcinotto.co.uk
www.calcinotto.co.uk

Client

ACL

Project Title

Pixmore Avenue

Drawing Title

External Works Plan

Drawing Status

Planning

Originator No.

114828

Rev by

MJ

Chk by

MD

Scale

1:200 @ A1

PROJECT | ORIGINATOR | ZONE | LEVEL | TYPE | ROLE | NO.

114828-CAL-XX-XX-DR-D-0500

Revision

P2