


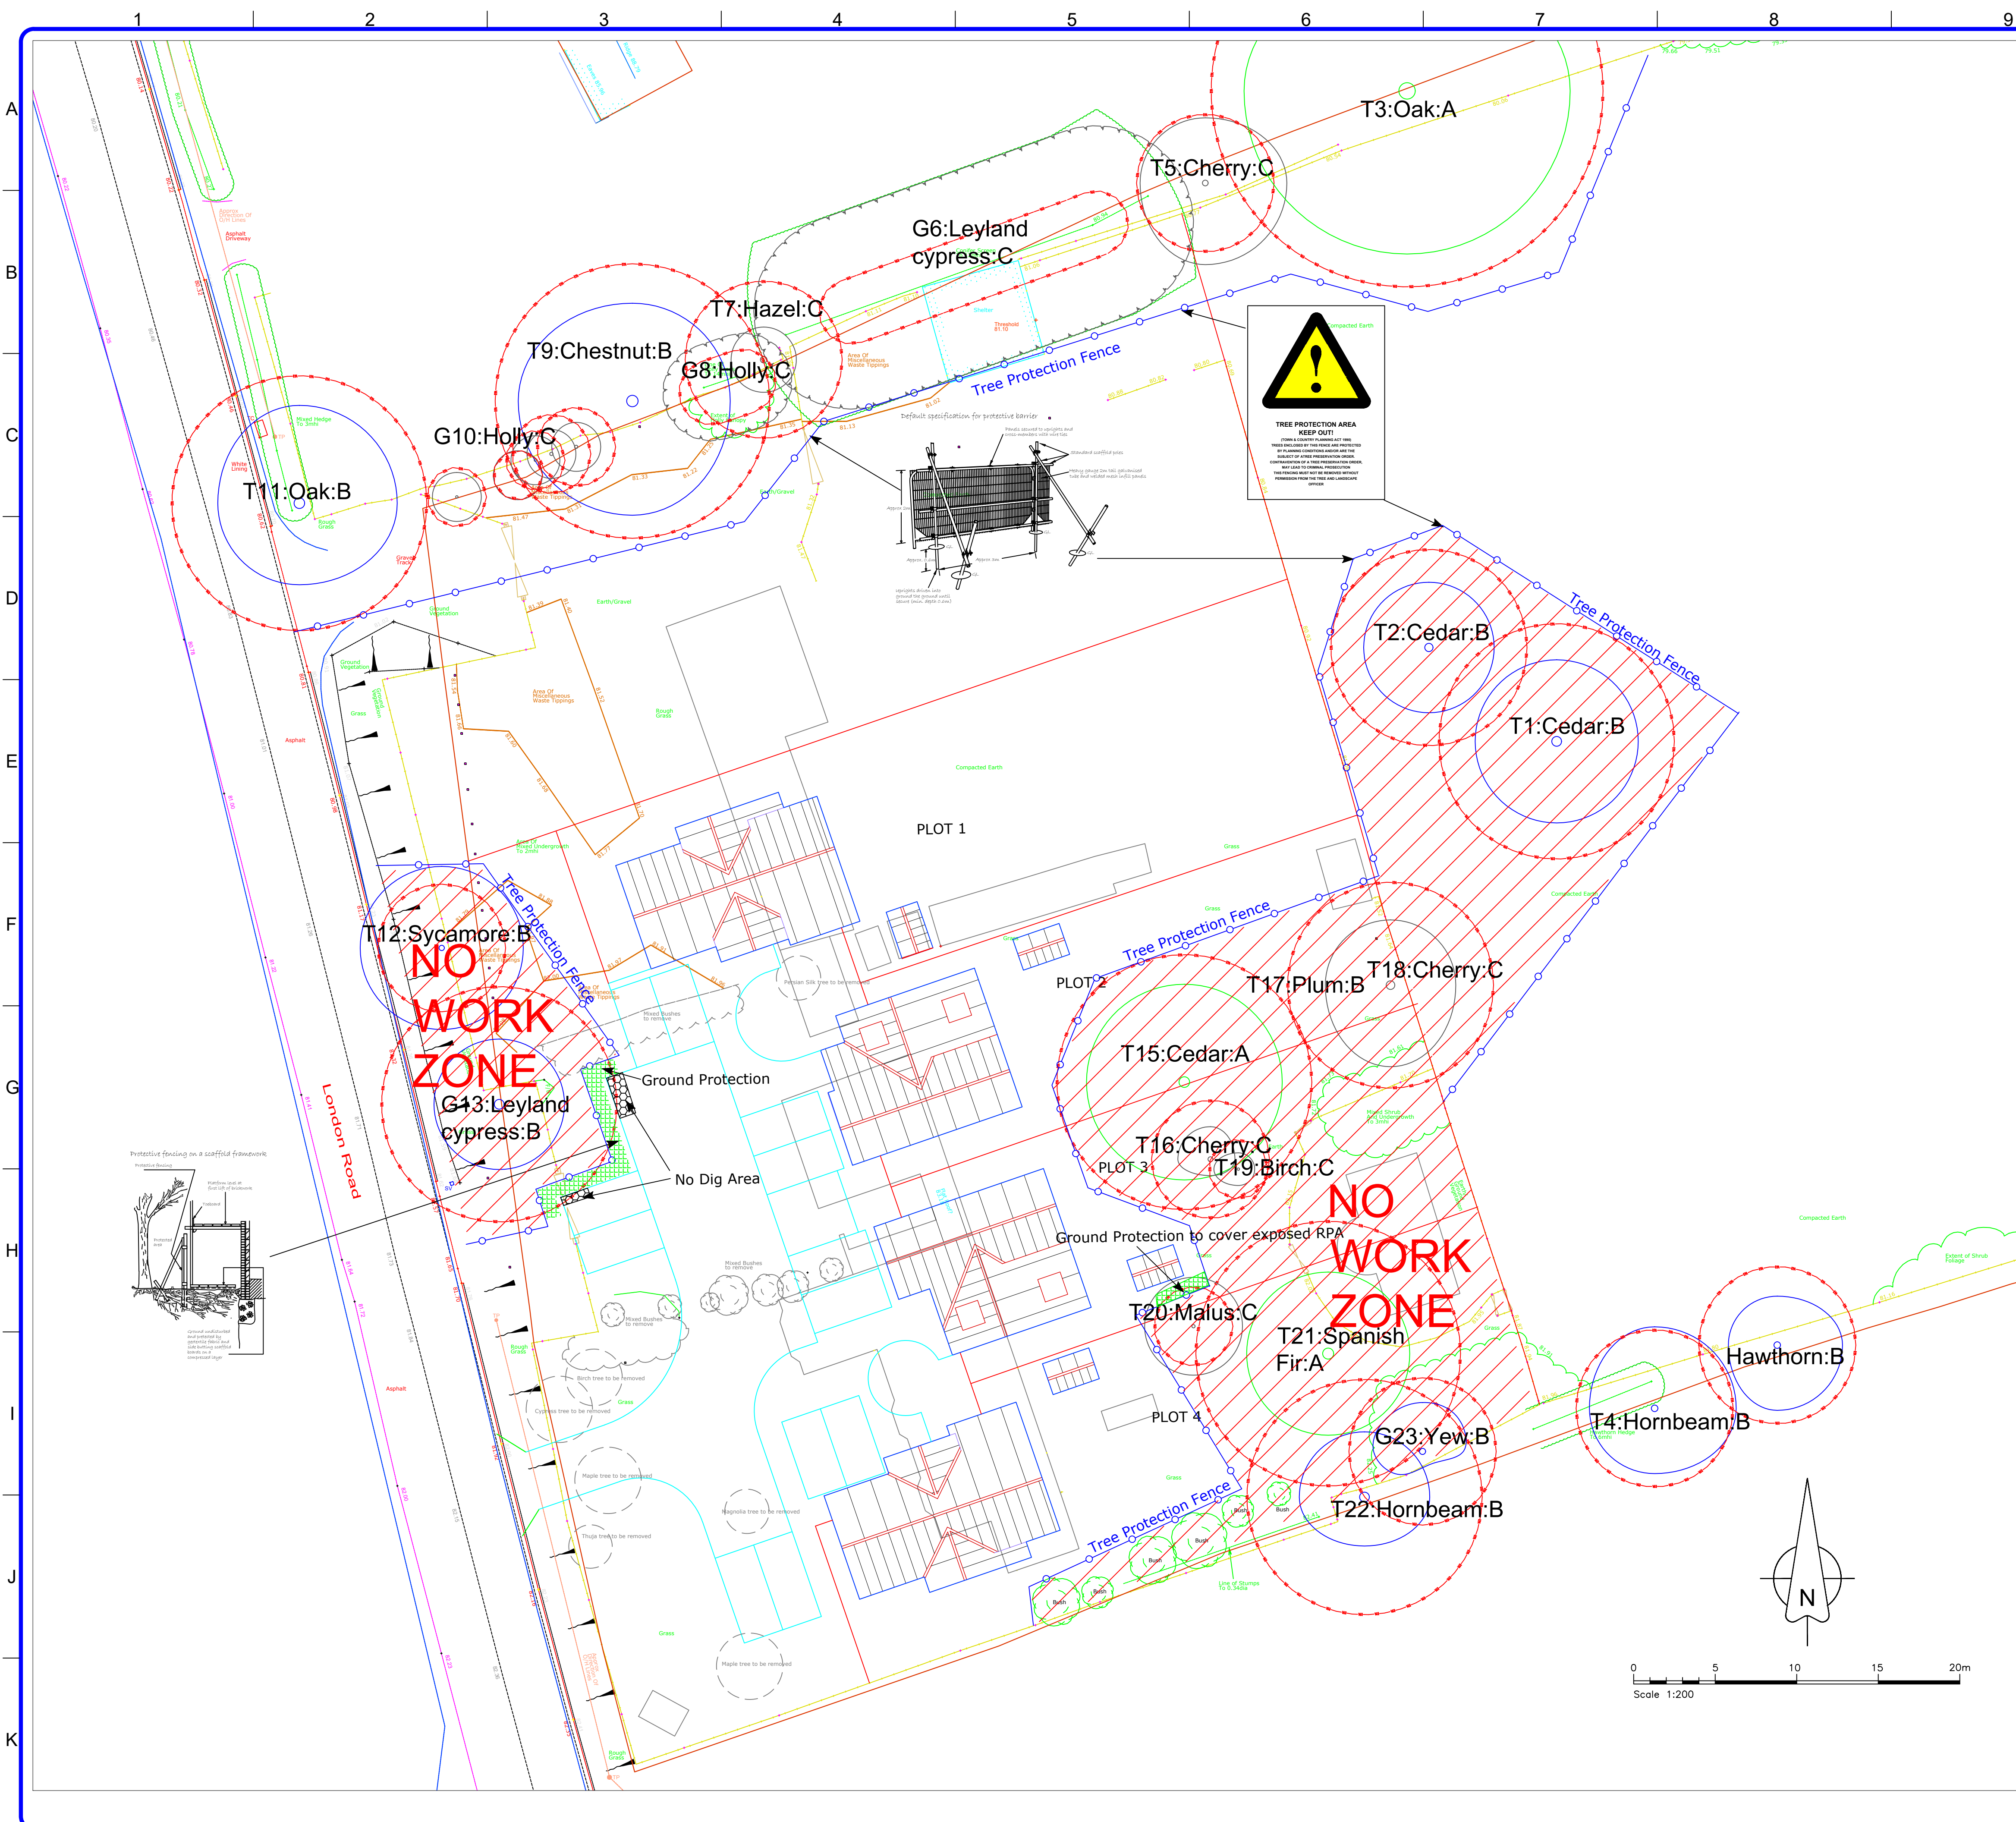

TREE LEGEND

A Grade	
B Grade	
C Grade	
U Grade	
RPA-Retained Trees	
Protection Fence	
Ground Protection	
No Dig construction	
No Work Zone	
Trees to Remove	

- ### TREE PROTECTION NOTES:

 - This Drawing must be reproduced in colour**
 - Tree Protection Fencing to be erected PRIOR to demolition works and remain in place during construction works
 - No Unauthorised Access signage to be attached to every 2nd fence panel
 - Tree and hedge removal works to be undertaken by a qualified arboricultural company
 - Ground protection to be installed near to the parking bays where indicated on the plan in green hatching
 - A No Dig construction method is to be used in the parking bay, within the RPA of G13

Bob Widd Associates
6 High Haden Road
Glafron, Huntingdon
Cambs. PE28 5RU
Tel: 01487 834495
bob@bwa-trees.co.uk

EM. Issue	DESCRIZIONE - Description	COMPL. Drawn up	VERIFIC. Check	APPROV. Approved	DATA Date
CODICE IDENTIFICAZIONE Identification code					
QUESTO DOCUMENTO NON PUO' ESSERE UTILIZZATO IN ALCUN MODO DA TERZI SENZA PREVENTIVA AUTORIZZAZIONE. This document cannot be used by others for any purpose without prior written consent.					
FOGLIO Sheet					
EM. Issue					
TITOLO - Title					
TREE PROTECTION PLAN GREENBANKS, LONDON ROAD ST IPPOLYTS, HERTS. SG4 7NJ					
IMPIANTO - Plant		DATA - Date		SCALA GRAFICA - Graphic scale	
		Sept 2026		1:200@A1	
RIF. CLIENTE - Client ref.					
Bonnel Construction Ltd					