


KEY

Soft Landscaping




Existing Trees/Vegetation Retained

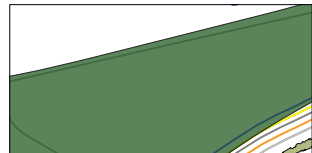


Proposed Bramble Scrub Planting



Proposed Mixed Native Woodland Planting

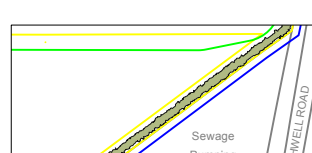


Proposed Mixed Native Hedge Planting

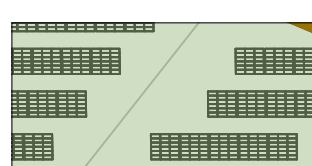

Proposed Grassland

Hard Landscaping

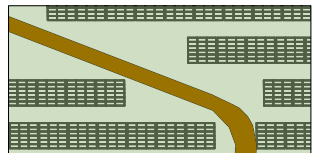

Proposed Access - Local Gravel.
Tracks will be recycled aggregates and the inverters will be installed on pile foundations, after cable works subsoil will be built up and finished with a granular hard surface.



Proposed Security Fencing

Emorsgate EM2 Standard General-Purpose Meadow Mixture sown at 4gms/m2

15% Wild flowers

0.50% Achillea millefolium – Yarrow
1.70% Centaurea nigra – Common Knapweed
1.50% Cruciatia laevipes – Crosswort
0.50% Daucus carota – Wild Carrot
0.50% Knautia arvensis – Field Scabious
1.50% Leucanthemum vulgare – Oxeye Daisy
2.00% Malva moschata – Musk Mallow
0.20% Medicago lupulina – Black Medick
3.00% Plantago lanceolata – Ribwort Plantain
1.50% Poterium sanguisorba ssp sanguisorba – Salad Burnet
0.09% Primula veris – Cowslip
0.30% Ranunculus acris – Meadow Buttercup
0.99% Rhinanthus minor – Yellow Rattle
0.49% Silene dioica – Red Campion
0.19% Silene vulgaris – Bladder Campion

85% Grasses

8.50% Agrostis capillaris – Common Bent
29.75% Cynosurus cristatus – Crested Dogstail
25.50% Festuca rubra – Red Fescue
4.25% Phleum bertolonii – Smaller Cat's-tail (a)
17.00% Poa pratensis – Smooth-stalked Meadow-grass

Note 1: UK/native plants and local suppliers to be used

Note 2: To be read in conjunction with the LEMP

NATIVE WOODLAND TRANSPLANTS @ 2.0m cts in drifts of up to 7


Code	Species	Root Condition	Age + Times Transpl	Height cm	Quantity
AC	Acer campestre (20%)	Bagged	2x	150-175	254
AG	Alnus glutinosa (10%)	Bagged	2x	150-175	127
BP	Betula pendula (10%)	Bagged	1+1	100-125	127
CM	Crataegus monogyna (10%)	Bagged	1+1	40-60	127
CA	Corylus avellana (10%)	Bagged	1+1	40-60	127
MS	Malus sylvestris (10%)	Bagged	1+2	100-125	127
PA	Prunus avium (10%)	Bagged	1+2	100-125	127
QR	Quercus robur (10%)	Bagged	1u1	100-125	127
SC	Salix caprea (10%)	Bagged	1+1	40-60	127

BRAMBLE SCRUB PLANTING @ 2.0m cts

Code	Species	Root Condition	Age + Times Transpl	Height cm	Quantity
AC	Acer campestre (5%)	Bagged	2x	150-175	19
CM	Crataegus monogyna (25%)	Bagged	1+1	40-60	94
CA	Corylus avellana (25%)	Bagged	1+1	40-60	94
PS	Prunus spinosa (15%)	Bagged	1+1	40-60	57
RF	Rubus fruticosus agg.(30%)	-	3L	40-60	112

NATIVE HEDGE TRANSPLANTS @ 5 per linear metre in double staggered row

Code	Species	Root Condition	Age + Times Transpl	Height cm	Quantity
AC	Acer campestre (10%)	Bagged	1+1	40-60	1097
CA	Corylus avellana (10%)	Bagged	1+1	40-60	1097
CM	Crataegus monogyna (10%)	Bagged	1+1	40-60	1097
EE	Euonymus europaeus (10%)	Bagged	1+1	40-60	1097
LV	Ligustrum vulgare (10%)	Bagged	1+1	40-60	1097
IA	Ilex aquifolium (10%)	9cm pot	-	30-40	1097
PS	Prunus spinosa (10%)	Bagged	1+1	40-60	1097
SC	Salix caprea (10%)	Bagged	1+1	40-60	1097
VL	Viburnum lantana (10%)	Bagged	1+1	40-60	1097
VO	Viburnum opulus (10%)	Bagged	1+1	40-60	1097

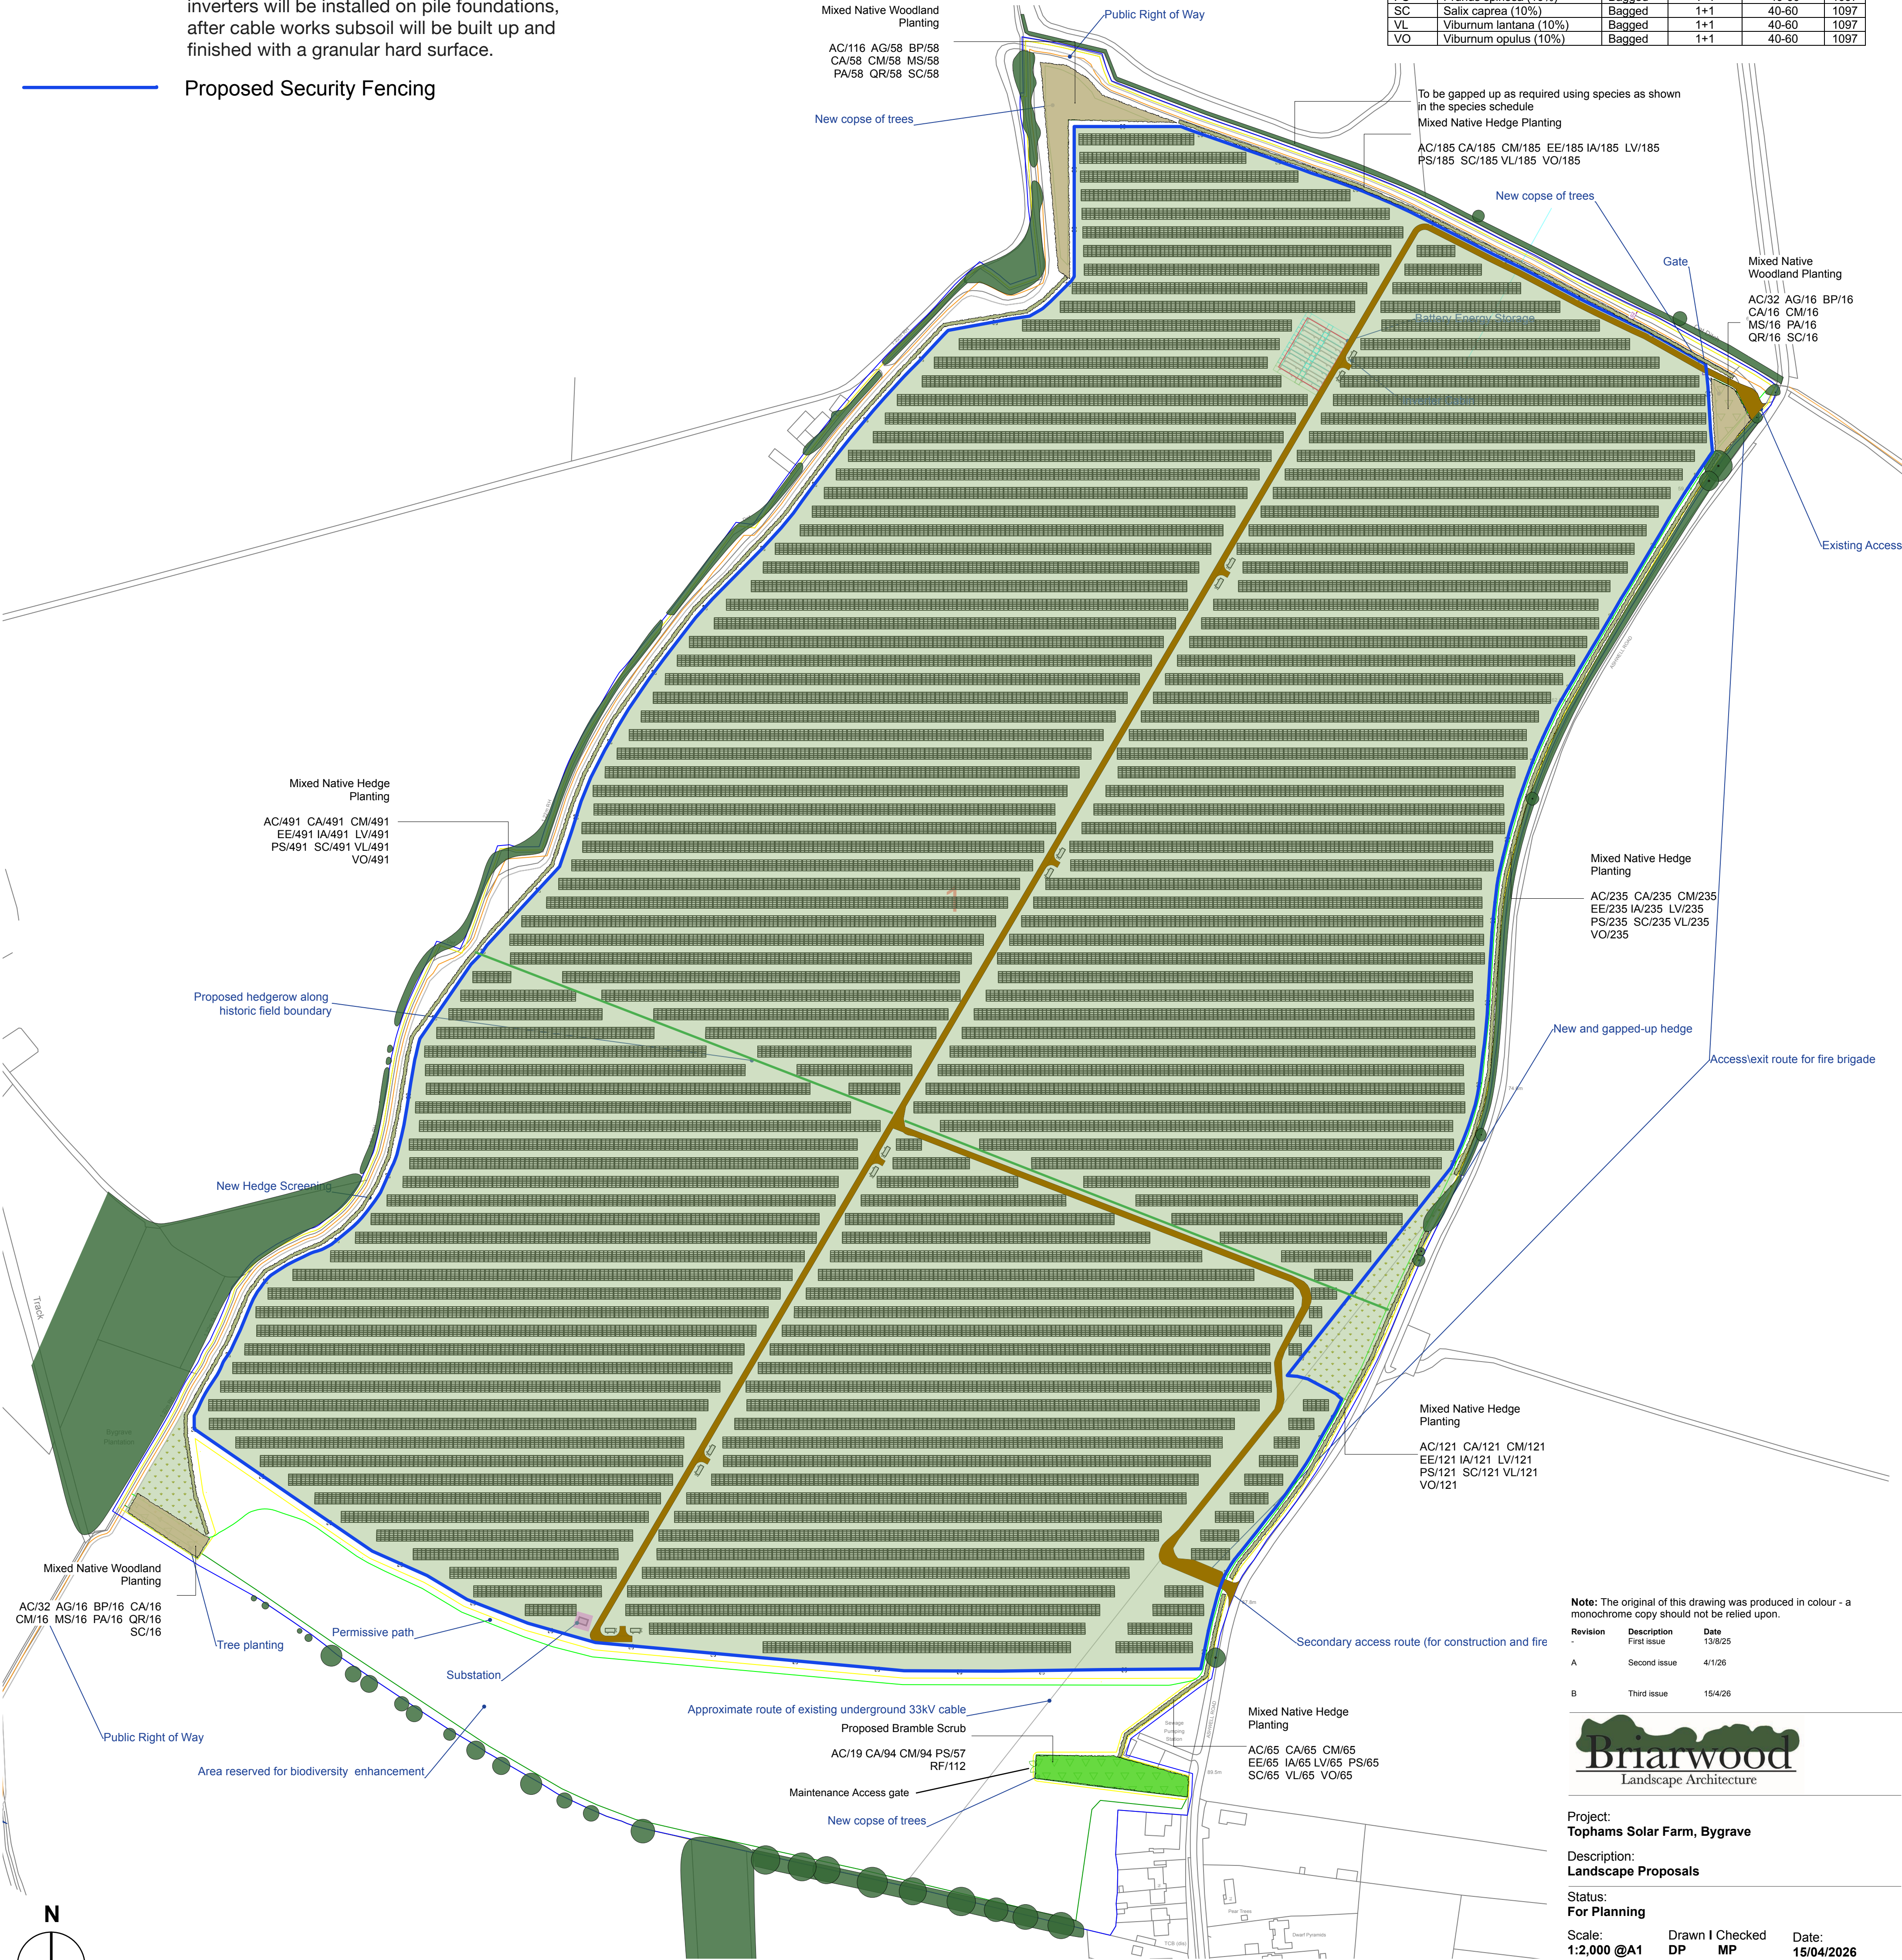

Note: The original of this drawing was produced in colour – a monochrome copy should not be relied upon.

Revision	Description	Date
-	First Issue	13/8/25
A	Second Issue	4/1/26
B	Third Issue	15/4/26



Project:
Tophams Solar Farm, Bygrave

Description:
Landscape Proposals

Status:
For Planning

Scale:
1:2,000 @A1

Job Number:
BLA 441

Drawn I Checked
DP MP

Date:
15/04/2026

Drawing Number:
02

Revision:
B