



However, there may be some overlap with the Great Wymondley Conservation Area: [Conservation Areas in villages | North Herts Council \(north-herts.gov.uk\)](https://www.north-herts.gov.uk/conservation-areas)

Please let me know if you have any other queries.

This is an informal decision of an officer and does not constitute a formal decision of the council.

Kind regards,



Henry Thomas
Graduate Planning Officer | Development Management

01462 474138

Celebrating 50 years



www.north-herts.gov.uk

From: Arno Van Heygen <Arno.VanHeygen@adas.co.uk>
Sent: Thursday, July 4, 2024 10:41 AM
To: Planning Control <Planning.Control@north-herts.gov.uk>
Subject: TPO Check

Hello

I am trying to establish if an area within North Herts Council contains any TPOs. I have found available online mapping to check for the presence of Conservation Areas but have failed to locate similar mapping to check for the presence of TPOs. If there is available mapping, would you be able to provide me with a link.

If no such mapping is available, would you kindly be able to undertake a search and inform me of the results. The site in question is rather large and spread out, so apologies in advance for this. The site is primarily composed of agricultural fields located north and south of Graveley Lane, Great Wymondley, SG4 7EX and I also need to check a route from this location (grid ref: TL 22189 28555) which travels along Graveley Lane,

Priory Lane, Stevenage Road, Blakemore End Road and Spurberry Hill where it terminates south of the National Grid Substation (grid ref: TL 20286 26686).

I have attached a site location plan for your reference and this search relates to planning ref: 21/03380/FP.

Many thanks for any assistance you can provide.

Kind regards

Arno van Heygen

L6 Cert Arb (ABC)/ MSc Environmental Forestry

Senior Arboricultural and Forestry Consultant

Environment

ADAS

Mobile: 07720 084 078

[Ecology](#) [Arboriculture](#) [Archaeology](#) [Planning](#) [Landscape](#) [Habitat Management](#) [Soils](#)
www.adas.uk

ADAS is a trading name of RSK ADAS Limited. Registered in England no. 10486936. Registered office: Spring Lodge, 172 Chester Road, Helsby, Cheshire, WA6 0AR. RSK ADAS Limited is part of RSK Group Limited

Any opinions expressed in this email are those solely of the individual. This email and any files transmitted with it are confidential and solely for the use of the intended recipient. If you are not the intended recipient or the person responsible for delivering to the recipient, be advised that you have received this email in error and that any use is strictly prohibited. If you have received this email in error please delete it.

The Customer Service Centre at the Council Offices is now open on Monday-Friday 9am-5pm. If you need to speak to us, please [contact us](#) to discuss how we can help.

Received your annual Council Tax bill? It's quick and easy to [manage your account online with MyAccount](#).



Appendix 5: Tree Survey Schedule

See following page.

Column Heading	Description
Tree Ref No.	All individual trees and groups of trees have been given a unique reference number. Each number is prefixed by a letter. T = Individual tree G = Group of trees H = Hedgerow W = Woodland
Species	The English common name has been used.
Single or Multiple stem (S or M)	'S' represents a tree which has a single clear stem to at least 1.5m above ground level. 'M(a)' represents a tree where the main stem divides into two to five stems below 1.5m above ground level. 'M(b)' represents a tree where the main stem divides into 6 or more stems below a height of 1.5m.
Height (m)	Where possible tree heights are measured using a laser. In some instances, such as in close groups of trees, one height may be measured, and other nearby trees estimated from this height. Measurements are provided in metres.
Stem Diameter (mm)	S _n represents the stem number. Measurements are provided in millimetres at 1.5m above ground level for single stemmed trees.
Very Large Girth (y/n)	Girth is very large for species in accordance with Fig 1.3 of publication 'Ancient and other veteran trees: further guidance on management' Ancient Tree Forum 2013. RAVEN - Step 1
Ancient (A), Veteran (V) or Notable (N)	Result of the RAVEN assessment © Julian Forbes-Laird 2018 www.flac.uk.com ; provided on separate ADAS Sheet 2. (RAVEN = Recognition of Ancient, Veteran & Notable Trees)
Branch Spread (m)	Measured in metres to the four cardinal compass points (N, E, S, W).
Crown Clearance	(1) Height in metres of the first significant branch, and the direction of growth. (2) Height in metres of lowest part of crown.
Life Stage	The stage at which the tree is within its lifecycle (Y = young, SM = semi-mature, EM = early-mature, M = mature, OM = over mature)
General Observations	Any relevant observations are recorded, with particular reference to structural and/or physiological condition.
Preliminary Management Recommendations	Recommendations are made where management work is required for reasons of health and safety or sound arboricultural management.
Estimated Remaining Contribution (years)	An estimation of how long the feature will contribute to its surroundings. This is recorded in bands of either <10 years, 10+ years, 20+ years and 40+ years.
Tree Quality Grading	The trees are graded to the categories prescribed within BS5837:2012 (U, A, B & C).
Root Protection Area	Calculated as prescribed in section 4.6 of BS5837:2012, provided as an area (m ²) and a radius from the tree's stem (m).
Note: Those measurements shown in italics have been estimated, where access is restricted.	



Tree Ref No.	Species	Single or Multiple Stem (S or M)	Height (m)	Stem Diameter											Very Large Girth (Y / N)	Ancient, Veteran or Notable (A, V or N)	Branch Spread				Crown Clearance		Life Stage	General Observations (structural / physiological condition)	Preliminary Management Recommendations	Estimated Remaining Contribution (years)	Tree Quality Grading	Root Protection Area	
				(mm)													(m)				(m)							(m ²) (radius in m)	
				S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	N			E	S	W	(1)	(2)								
G1	Hawthorn, Blackthorn, Field Maple, Horse Chestnut	M(a)	5	110	100	90	80	75							N	-	2	2	2	2	0.5-S	0	Y	The measurements taken are representative of group.	None	10+	C2	19.1	2.5
T2	Sycamore	M(a)	8.5	160	210	90									N	-	3.5	3	3.5	3.5	1.5-N	2	SM	Minor deadwood in the crown.	None	10+	C1	35.2	3.3
T3	Ash	S	11	200											N	-	2.5	2.5	2.5	2.5	1.0-S	1	SM	Restricted Visual tree assessment due to steep bank and dense undergrowth.	None	10+	C1	18.1	2.4
T4	Ash	S	12	240											N	-	3	3	3	3	1.0-S	1	SM	Restricted visual tree assessment due to steep bank and dense undergrowth.	None	10+	C1	26.1	2.9
T5	Field Maple	S	4.5	100											N	-	1.5	1.5	1.5	1.5	0.5-S	0	Y	No significant defects at the time of the survey.	None	10+	C1	4.5	1.2
T6	Oak	S	8	350											N	-	5	4.5	5	3.5	1.5-S	1	SM	Deadwood in northern aspect of the crown with the first branch abrading against the fencing.	Axis to inform landowner of the trees condition and seek removal of the damaged branches.	20+	B1	55.4	4.2
G7	Blackthorn	M(a)	4.5	90	80	75									N	-	2	2	2	2	0.5-S	0	Y	No significant defects at the time of the survey.	None	10+	C1	9.1	1.7
G8	Field Maple	M(a)	6	120	110	75									N	-	2	2	2	2	1.0-W	0	SM	The measurements are representative of group. Poor condition. The central individual tree has dieback in the crown and is flailed on western aspect.	Axis to advise landowner to seek further advice to assess structural integrity of the central individual tree.	10+	C2	14.5	2.2
T9	Apple	S	8	400											N	-	5	4.5	5	3.5	0.5-W	0.5	M	Restricted visual tree assessment due to dense undergrowth and a ditch. Flail on western aspect, with minor deadwood and a small cavity on western aspect at 6m.	None	20+	B1	72.4	4.8
T10	Hazel	M(a)	5	75	80	90									N	-	2	2	2	2	0-S	0	Y	No significant defects at the time of the survey.	None	10+	C1	9.1	1.7
T11	Elder	M(a)	4.5	120	75	75									N	-	2	2	2	2	1.0-W	0.5	Y	Minor deadwood in the crown.	None	10+	C1	11.6	1.9
T12	Willow	M(a)	8	200	170	150	130	110							N	-	4	2	4	2	0.5-S	0	SM	No significant defects at the time of the survey.	None	10+	C1	54.5	4.2
T13	Hawthorn, Blackthorn, Field Maple, Horse Chestnut	M(a)	7	130	120	100	90	75							N	-	3.5	2	3	2	0.5-S	0.5	SM	Minor deadwood in the crown.	None	10+	C1	24.9	2.8
G14	Elder, Oak, Hawthorn, Blackthorn	M(a)	4	110	100	90	80	75							N	-	1.5	1.5	1.5	1.5	0.5-S	0.5	Y	The measurements are representative of group.	None	10+	C2	19.1	2.5
T15	Oak	S	13	800											N	-	6	6	8	7.5	0.5-S	0.5	M	Deadwood in the crown including some broken branches and flail on south-western aspect.	Axis to inform landowner of the trees condition and seek removal of the dead and damaged branches.	20+	B1	289.6	9.6
G16	Blackthorn	M(a)	4	75	75	75									N	-	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements are representative of group and no significant defects found at the time of the survey.	None	10+	C2	7.6	1.6
T17	Oak	S	10	210											N	-	4	4	4	4	3.0-S	2.5	SM	Minor deadwood in the crown.	None	20+	B1	20.0	2.5
T18	Oak	M(a)	9	160	120	100									N	-	1.5	2	4	2.5	1.0-W	2	SM	The tree is being suppressed on the north.	None	10+	C1	22.6	2.7
G19	Ash	M(a)	13	290	210	250									N	-	4	4	3	4	3.0-N	3	EM	Crown dieback on every individual tree with symptoms of Ash Dieback. Ivy clad and deadwood in the crown.	Axis to inform landowner of the trees condition and seek further arboricultural advice.	10+	C2	86.3	5.2
T20	Field Maple	M(a)	7.5	160	140	90									N	-	2.5	3	2.5	2	1.0-E	0	SM	No significant defects at the time of the survey.	None	10+	C1	24.1	2.8
T21	Ash	M(b)	9	100	90	180	210	220	380						N	-	4	4	4	3	1.0-E	0.5	SM	Flail on southwestern aspect and some minor deadwood in the crown.	None	20+	B1	105.0	5.8
G22	Blackthorn, Willow, Oak, Hazel	M(a)	6	110	100	90	80	75							N	-	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T23	Oak	S	13	780											N	-	5	6.5	7	7	1.5-N	1	M	Deadwood and minor cavities in the crown and flail on south western aspect.	None	20+	B1	275.3	9.4
T24	Oak	S	12	710											N	-	6	6	8	8	1.5-N	0	M	Deadwood, abrading branches and minor cavities in the crown and flail on south western aspect.	Axis to inform landowner of the trees condition and seek removal of the dead and damaged branches.	20+	B1	228.1	8.5
G25	Blackthorn, Hawthorn	M(a)	5	110	100	90	80	75							N	-	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group. Minor deadwood in the crowns.	None	10+	C2	19.1	2.5
T26	Ash	M(b)	13	170	130	120	180	90	130	110	160	140	160		N	-	4	4	4	3.5	1.0-N	0.5	SM	Multi stemmed coppice with some minor deadwood in the crown.	None	10+	C1	87.4	5.3
T27	Ash	M(b)	12	220	100	120	160	150	110	170	170				N	-	4.5	4.5	5	4.5	0.5-N	0.5	EM	Minor deadwood in the crown and flail on south western aspect.	None	20+	B1	81.4	5.1
G28	Blackthorn	M(a)	5.5	110	100	90	80	75							N	-	2	2	2	2	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T29	Oak	S	13	860											N	-	6.5	7	7	6	2.5-E	1	M	Branch failure has resulted in decay on the southern aspect and there is deadwood in the crown.	Axis to inform landowner of the trees condition and seek further arboricultural advice.	20+	B1	334.6	10.3
T30	Oak	S	14	740											N	-	7	6.5	8	6	4.0-S	3	M	The western aspect has significant deadwood with previous pruning has been undertaken. The tree is ivy clad.	Axis to inform landowner of the trees condition and seek removal of the dead branches.	20+	B1	247.8	8.9
T31	Oak	S	15	700											N	-	7	8.5	8	10	4.5-S	2.5	M	Minor deadwood in the crown. This tree is being suppressed by surrounding trees.	None	20+	B1	221.7	8.4
T32	Ash	M(a)	16	540	490	430									N	-	8	6	7	9	3.0-S	1	M	Deadwood in the crown.	None	20+	B1	324.2	10.2



Tree Ref No.	Species	Single or Multiple Stem (S or M)	Height (m)	Stem Diameter (mm)										Very Large Girth (Y / N)	Ancient, Veteran or Notable (A, V or N)	Branch Spread (m)				Crown Clearance (m)		Life Stage	General Observations (structural / physiological condition)	Preliminary Management Recommendations	Estimated Remaining Contribution (years)	Tree Quality Grading	Root Protection Area		
				S1	S2	S3	S4	S5	S6	S7	S8	S9	S10			N	E	S	W	(1)	(2)						(m²)	(radius in m)	(radius in m)
T33	Oak	S	13	780											N	-	6	1.5	7.5	6.5	1.5-S	0.5	M	Diameter was measured at 1m, under the first branch flar. Flail on southern aspect and deadwood in the crown. The tree is suppressed by surrounding trees.	Axis to inform landowner of the trees condition and seek removal of the dead and damaged branches.	20+	B1	275.3	9.4
G34	Elder, Hawthorn	M(a)	4.5	130	75										N	-	2.5	2.5	2.5	2.5	0.5-W	1	SM	The measurements taken are representative of the group.	None	10+	C2	10.2	1.8
T35	Hawthorn	M(a)	3.5	75	75	75									N	-	1.5	1.5	1.5	1.5	0.5-S	0.5	SM	No significant defects at the time of the survey.	None	10+	C1	7.6	1.6
G36	Hawthorn	M(a)	3.5	110	100	90	80	75							N	-	1.5	1.5	1.5	1.5	0.5-S	0.5	SM	No significant defects at the time of the survey.	None	10+	C2	19.1	2.5
G37	Elder, Hawthorn	M(a)	4	110	100	90	80	75							N	-	2	2	2	2	0.5-N	0.5	SM	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T38	Oak	S	17	910											N	-	7.5	7	8	8	2.0-E	1	M	There is a significant dead branch on the eastern aspect at 6m, deadwood and a fungal body growing in the crown. Flail on east and western aspects.	Axis to advise landowner to seek further advice to assess structural integrity of the tree.	20+	B1	374.7	10.9
G39	Elder, Hawthorn	M(a)	4	110	100	90	80	75							N	-	1.5	1.5	1.5	1.5	0.5-S	0	SM	No significant defects at the time of the survey.	None	10+	C2	19.1	2.5
G40	Hawthorn	M(a)	4	110	100	90	80	75							N	-	1.5	1.5	1.5	1.5	0.5-S	0	SM	No significant defects at the time of the survey.	None	10+	C2	19.1	2.5
G41	Elder, Hawthorn	M(a)	4	110	100	90	80	75							N	-	1.5	1.5	1.5	1.5	0.5-S	0	SM	No significant defects at the time of the survey.	None	10+	C2	19.1	2.5
G42	Hawthorn	M(a)	4	110	100	90	80	75							N	-	1.5	1.5	1.5	1.5	0.5-S	0	SM	No significant defects at the time of the survey.	None	10+	C2	19.1	2.5
G43	Hawthorn	M(a)	4	110	100	90	80	75							N	-	1.5	1.5	1.5	1.5	0.5-S	0	SM	No significant defects at the time of the survey.	None	10+	C2	19.1	2.5
T44	Ash	S	17	750											N	-	9	8.5	8	8.5	1.0-E	1	M	Deadwood and flail on the western aspect. There are cavities at the stem base on the north, south and west aspects.	Axis to inform landowner of the trees condition and seek further arboricultural advice.	20+	B1	254.5	9.0
T45	Ash	M(a)	15	580	130	120	100	80							N	-	6	6	6	4.5	0.5-E	1.5	M	There is some minor deadwood in the crown.	None	20+	B1	173.8	7.4
T46	Hawthorn	M(a)	5	120	100	75									N	-	1	1.5	1.5	1.5	0.5-S	0.5	SM	Understory of T45.	None	10+	C1	13.6	2.1
T47	Ash	M(b)	6.5	170	100	120	90	110	75	80	80	90	90	N	-	4	4	5.5	4	0.5-S	0.5	SM	Previous pruning has been undertaken up to 2m all over the crown.	None	10+	C1	45.7	3.8	
T48	Hawthorn	M(b)	3.5	120	110	100	90	80	75						N	-	2.5	1	3	1	0.5-S	0.5	SM	Minor deadwood in the crown.	None	10+	C1	24.9	2.8
T49	Ash	M(a)	12	600	130	120	130								N	-	7	6	7.5	7	1.0-E	1	M	Deadwood in the crown and flail on western and east aspects.	None	20+	B1	184.7	7.7
G50	Blackthorn, Hawthorn	M(a)	4.5	75	75	750									N	-	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	259.6	9.1
G51	Field Maple, Hawthorn	M(a)	5.5	110	100	90	80	75							N	-	2	2	2	2	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T52	Ash	M(b)	11	120	120	110	110	100	100	100	80	75	75	N	-	4	4.5	4.5	3.5	3.0-S	4	SM	No significant defects at the time of the survey.	None	10+	C1	44.3	3.8	
H53	Blackthorn, Hawthorn, Field Maple	M(b)	5.5	170	160	150	140	130	120	110	90	80	75	N	-	1.5	1.5	1.5	1.5	0.5-S	0	SM	The measurements taken are representative of the group.	None	10+	C2	67.9	4.6	
H54	Blackthorn, Hawthorn, Field Maple	M(b)	5.5	170	160	150	140	130	120	110	90	80	75	N	-	3	3	3	3	0.5-S	0	SM	Staggered hedgerow with gaps and some emerging trees. Measurements taken are representative of the group.	None	10+	C2	67.9	4.6	
T55	Field Maple	M(a)	8.5	220	200	210									N	-	4	4.5	5	5	1.0-N	0.5	EM	Minor deadwood in the crown and ivy clad.	None	20+	B1	59.9	4.4
H56	Blackthorn, Hawthorn, Field Maple, Hazel	M(a)	3	110	100	90	80	75							N	-	1	1	1	1	0.5-S	0	Y	A maintained hedgerow with gaps. Forms the understory of T57 and contains some emerging trees.	None	10+	C2	19.1	2.5
T57	Oak	S	11	920											N	-	6.5	6	6.5	7	0.5-W	1.5	M	Bracket fungus found at the stem base on the north and west aspect. Ivy clad throughout with moderate size dead branches throughout the crown.	Axis to advise landowner to seek further advice to assess structural integrity of the tree.	10+	C1	383.0	11.0
T58	Oak	S	9	460											N	-	5.5	4.5	6	5	2.5-S	2.5	EM	Minor deadwood in the crown and a cavity on the west of the stem base.	None	20+	B1	95.7	5.5
H59	Blackthorn, Hawthorn, Elder	M(a)	4	110	100	90	80	75							N	-	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
H60	Blackthorn, Hawthorn, Elder	M(a)	4	110	100	90	80	75							N	-	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T61	Oak	S	15	720											N	-	6.5	8.5	8.5	7	3.5-S	3.5	M	Deadwood in the crown, with abrading branches.	Axis to inform landowner of the trees condition and seek removal of the dead and damaged branches.	20+	B1	234.5	8.6
G62	Ash	S	14	400											N	-	5.5	5.5	5.5	5.5	2.5-E	2	SM	The measurements taken are representative of the group.	None	20+	B2	72.4	4.8
T63	Oak	S	18	1490											Y	V	10	9	9	10	4.5-S	0	OM	This tree has been assessed using RAVEN (recognition of ancient veteran and notable trees) and has been classified as a veteran tree. Some crown retrenchment. Significant deadwood in the crown and previous pruning has been undertaken on the eastern aspect.	Axis to inform landowner of the trees condition and seek removal of significant sized dead and damaged branches.	20+	B1	707.0	15.0



Tree Ref No.	Species	Single or Multiple Stem (S or M)	Height (m)	Stem Diameter (mm)											Very Large Girth (Y / N)	Ancient, Veteran or Notable (A, V or N)	Branch Spread (m)				Crown Clearance (m)		Life Stage	General Observations (structural / physiological condition)	Preliminary Management Recommendations	Estimated Remaining Contribution (years)	Tree Quality Grading	Root Protection Area	
				S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	N			E	S	W	(1)	(2)	(m²)						(radius in m)	
T64	Oak	S	14	780											N	—	5.5	6.5	5	5	2.5-W	4	OM	The tree is dying.	Axis to inform landowner of the trees condition and seek removal.	<10	U	275.3	9.4
T65	Ash	S	15	630											N	—	7.5	7	8	7	2.5-S	1.5	M	Ivy clad and some small deadwood in the crown. Previous pruning has been undertaken.	None	20+	B1	179.6	7.6
G66	Blackthorn	M(a)	3.5	75	75	75									N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	No significant defects at the time of the survey.	None	10+	C2	7.6	1.6
T67	Ash	M(b)	8	150	150	120	90	130	140						N	—	3.5	3.5	3	3	1.0-S	1.5	SM	Minor deadwood in the crown.	None	10+	C1	45.9	3.8
T68	Ash	M(a)	9	180	170	140	110	100							N	—	4	4	4.5	4	1.0-S	1	SM	No significant defects at the time of the survey.	None	10+	C1	46.6	3.9
T69	Ash	M(a)	19	490	480	410	390								N	—	5	8	7	6.5	2.0-W	2	M	Restricted visual tree assessment due to dense undergrowth. Ivy clad with cavities on the stem and some deadwood in the crown.	None	20+	B1	357.8	10.7
T70	Ash	M(a)	19	460	470	300									N	—	8	6	2	5	3.0-W	1	M	Tree is suppressed by T69 and has deadwood in the crown.	None	20+	B1	236.4	8.7
G71	Blackthorn	M(a)	3.5	75	75	75									N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	No significant defects at the time of the survey.	None	10+	C2	7.6	1.6
T72	Oak	S	9	400											N	—	4	4	5	5	1.0-S	0	EM	Flail on eastern side.	None	20+	B1	72.4	4.8
T73	Willow	M(b)	16	430	100	90	80	700	350	280	250	160	150		N	—	4	8	7	6	0-S	1	OM	Tree is dying.	Axis to inform landowner of the trees condition and seek removal.	<10	U	303.5	9.8
T74	Willow	M(b)	14	320	280	270	240	240	120	110	100	140			N	—	3	6	5	4	0-S	2	OM	Tree is dead.	Axis to inform landowner of the trees condition and seek removal.	<10	U	166.5	7.3
T75	Ash	S	19	680											N	—	6	6	7	8	1.0-E	1	M	A large open cavity from 5-8m on the western aspect. Deadwood in the crown.	Axis to advise landowner to seek further advice to assess structural integrity of the tree.	20+	B1	209.2	8.2
T76	Oak	S	15	640											N	—	7	6.5	7.5	4.5	1.5-E	1.5	M	Cavity at 4m on the southern aspect. Deadwood in the crown.	None	20+	B1	185.3	7.7
H77	Hawthorn, Blackthorn, Field Maple, Hazel	M(a)	4	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	No significant defects at the time of the survey. Maintained hedgerow.	None	10+	C2	19.1	2.5
T78	Oak	S	12	560											N	—	5	4	7	5	3.0-W	2	M	Flail on south aspect with historical stem damage.	None	20+	B1	141.9	6.7
T79	Oak	S	13	820											N	—	7	7	8	5	1.5-S	1	M	Deadwood in the crown which is significant on western aspect. Flail on southern aspect.	None	20+	B1	304.2	9.8
T80	Oak	S	16	780											N	—	9	6	8	8	5.0-N	3	M	Significant deadwood on east aspect. Previous minor pruning has been undertaken.	None	20+	B1	275.3	9.4
T81	Ash	M(a)	11	180	75	170	140	110							N	—	6	5	4.5	3	3.0-S	3	SM	No significant defects at the time of the survey.	None	10+	C1	44.6	3.8
T82	Oak	S	11	580											N	—	7	2	3	5	3.5-W	3	OM	Tree is dead.	Axis to inform landowner of the trees condition and seek removal.	<10	U	152.2	7.0
T83	Oak	S	18	900											N	—	9	6	8	8	2.0-W	2	M	Deadwood in the crown and flail on southern aspect.	None	20+	B1	366.5	10.8
T84	Oak	S	18	900											N	—	8	9	9	5	0-W	1	M	Deadwood in the crown and flail on southern aspect.	None	20+	B1	366.5	10.8
T85	Oak	S	16	800											N	—	8	7	6.5	7	1.5-N	1	M	Deadwood in the crown.	None	20+	B1	289.6	9.6
T86	Oak	S	11	760											N	—	7	6	5	6	3.0-E	1	M	Significant crown dieback with bark missing, cavities and deadwood in the crown.	None	10+	C1	261.3	9.1
T87	Oak	S	16	970											N	—	6.5	7	5	7	1.5-W	1	M	Significant deadwood in the crown. Historical wound on main stem at 0-1.5m on south aspect.	None	20+	B1	425.7	11.6
W88	Pine, Fir, Oak, Ash, Larch, Hawthorn, Elder	S	16	300											N	—	6	6	6	6	1.0-S	1	EM	Restricted visual tree assessment due to dense nettle undergrowth. The measurements taken are representative of the group.	None	20+	B2	40.7	3.6
G89	Poplar, Field Maple, Oak, Blackthorn	S	17	500											N	—	6	6	6	6	1.0-S	1	EM	The measurements taken are representative of the group. The majority are Poplar with other species dispersed forming the understorey. Restricted visual tree assessment due to dense bramble and nettle undergrowth.	None	20+	B2	113.1	6.0
G90	Poplar, Ash	S	22	420											N	—	5	5	5	5	3.0-S	1.5	EM	The measurements taken are representative of the group. Some trees have deadwood in upper crowns. Two dead Poplars are located on the east of the group.	Axis to inform landowner of the trees condition and seek removal of the two dead trees.	20+	B2	79.8	5.0
G91	Larch, Horse Chestnut, Oak, Ash, Sycamore, Hawthorn	S	18	500											N	—	6	6	6	6	1.5-S	1	EM	The measurements taken are representative of the group. Restricted visual tree assessment due to dense bramble and nettle undergrowth.	None	20+	B2	113.1	6.0
T92	Oak	S	17	820											N	—	8	10	10	10	1.5-W	1	M	Restricted visual tree assessment due to dense nettle undergrowth and ditch. Deadwood in the crowns and flail on south aspect.	None	20+	B1	304.2	9.8
T93	Oak	S	10	650											N	—	6	6.5	7	6	2.5-N	1.5	M	Large central stem failure at 4m. Restricted visual tree assessment due to ditch and brambles.	Axis to advise landowner to seek further advice to assess structural integrity of the tree	10+	C1	191.2	7.8
T94	Oak	M(a)	13	360	320										N	—	4	5	4.5	4	1.5-N	1	M	Minor deadwood in the crown. Some abrading branches.	Axis to inform landowner of the trees condition and seek removal of the dead and damaged branches.	20+	B1	105.0	5.8



Tree Ref No.	Species	Single or Multiple Stem (S or M)	Height (m)	Stem Diameter (mm)										Very Large Girth (Y / N)	Ancient, Veteran or Notable (A, V or N)	Branch Spread				Crown Clearance (m)	Life Stage	General Observations (structural / physiological condition)	Preliminary Management Recommendations	Estimated Remaining Contribution (years)	Tree Quality Grading	Root Protection Area			
																												m ²	radius in m
				G1	G2	G3	G4	G5	G6	G7	G8	G9	G10			N	E	S	W							(1)	(2)		
T95	Field Maple	M(a)	10	250	230									N	—	4.5	4	4.5	4.5	1.0-E	2	EM	Flail damage on north aspect and minor deadwood in the crown.	None	20+	B1	52.2	4.1	
H96	Blackthorn, Hawthorn, Field Maple	M(a)	4	110	100	90	80	75						N	—	1	1	1	1	0.5-S	0	Y	Maintained hedgerow forming tree understorey with some emergent trees.	None	10+	C2	19.1	2.5	
G97	Field Maple	S	9	130	100	120								N	—	3.5	3.5	3.5	3.5	1.5-N	4	SM	The measurements taken are representative of the group.. Emerging multi-stemmed trees from hedgerow.	None	10+	C2	7.6	1.6	
T98	Oak	S	8	300										N	—	2	4	5	4.5	4.0-E	4	SM	Tree is suppressed on north west aspect. Clematis is climbing through the crown. Deadwood and broken branches present in the crown.	Axis to inform landowner of the trees condition and seek removal of the dead and damaged branches.	10+	C1	40.7	3.6	
G99	Hawthorn, Field Maple	M(a)	5	120	100	75	130	180						N	—	3.5	3.5	3.5	3.5	0.5-E	0.5	Y	The measurements taken are representative of the group.	None	10+	C2	35.9	3.4	
T100	Field Maple	M(a)	5.5	100	90	80	80	75						N	—	2.5	2.5	2.5	2.5	0.5-E	0	SM	No significant defects at the time of the survey.	None	10+	C1	16.5	2.3	
G101	Blackthorn, Hawthorn, Field Maple, Cherry	M(a)	6	110	75	100	100	75						N	—	2	2	2	2	0.5-S	0.5	SM	The measurements taken are representative of the group.	None	10+	C2	19.6	2.5	
T102	Field Maple	M(a)	5	90	80	75	75	75						N	—	2.5	3.5	2	3	0.5-W	0	SM	No significant defects at the time of the survey.	None	10+	C1	14.2	2.1	
G103	Hazel, Hawthorn, Field Maple	M(a)	6	75	75	75	75	75						N	—	2.5	2.5	2.5	2.5	0-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	12.7	2.0	
T104	Field Maple	M(a)	9	240	260	230								N	—	4.5	5	4.5	5	1.0-W	1	EM	Minor deadwood and flail on the south western aspect.	None	20+	B1	80.6	5.1	
T105	Horse Chestnut	M(a)	7.5	240	260									N	—	3	3	3	3	1.0-S	1	SM	Minor deadwood in the crown. Leaf miner present.	None	10+	C1	56.6	4.2	
G106	Hawthorn, Field Maple, Cherry, Yew	M(a)	5	90	80	75	75	75						N	—	2	2	2	2	0.5-S	0.5	Y	The measurements taken are representative of the group.. Understorey of boundary trees.	None	10+	C2	14.2	2.1	
T107	Horse Chestnut	M(a)	8.5	210	170									N	—	2	2.5	2.5	2	1.0-S	0.5	SM	Minor deadwood in the crown. Leaf miner present.	None	10+	C1	33.0	3.2	
T108	Ash	M(a)	10	210	250									N	—	3	4	2	4.5	1.0-W	1	SM	Minor deadwood in the crown.	None	10+	C1	48.2	3.9	
T109	Horse Chestnut	S	5	170										N	—	2	1.5	2	2	1.5-N	1	SM	Leaf miner present.	None	10+	C1	13.1	2.0	
T110	Horse Chestnut	S	8	400										N	—	4	4	2	4	1.0-W	0.5	SM	Flail on south aspect of crown, and leaf miner present.	None	10+	C2	72.4	4.8	
T111	Ash	M(a)	7.5	130	150	90								N	—	2.5	3.5	3	2	1.0-S	1	EM	No significant defects at the time of the survey.	None	10+	C1	21.5	2.6	
T112	Horse Chestnut	M(a)	9	290	320									N	—	5	5	2	4.5	1.0-N	0.5	EM	Leaf miner present.	None	10+	C1	84.4	5.2	
T113	Ash	M(a)	7	120	110	110								N	—	3	2	2	2	1.5-S	1	SM	Signs of Ash Dieback and some deadwood in the crown.	Axis to inform landowner of the trees condition and seek further arboricultural advice.	10+	C1	17.5	2.4	
G114	Field Maple, Hawthorn, Dogwood	M(a)	10	260	200	150	120							N	—	4.5	4.5	4.5	4.5	1.0-N	0.5	SM	The measurements taken are representative of the group. Field Maple is dominant.	None	10+	C2	65.4	4.6	
T115	Oak	M(a)	12	430	490									N	—	7	6.5	6.5	7	1.0-W	1	M	Deadwood in the crown. Flail on south aspect resulting in some broken branches.	None	20+	B1	192.3	7.8	
T116	Apple	M(a)	3.5	120	110	100								N	—	2	2	2	2	1.0-N	0.5	Y	Restricted visual tree assessment due to being on the motorway embankment.	None	10+	C1	16.5	2.3	
T117	Oak	S	12	400										N	—	5	5	5	5	1.5-S	1	EM	Minor deadwood in the crown and flail on the western aspect.	None	20+	B1	72.4	4.8	
T118	Oak	S	12	550										N	—	5.5	5	6	6	1.0-N	1	M	Minor deadwood in the crown and flail on the western aspect.	None	20+	B1	136.9	6.6	
T119	Ash	M(a)	6.5	110	90	80								N	—	2	2	2	2	1.0-S	1	Y	Restricted visual tree assessment due to being on the motorway embankment.	None	10+	C1	12.0	2.0	
T120	Field Maple	M(b)	6	120	110	110	110	90	80	100	100	75	75	N	—	3.5	3.5	3.5	3.5	0.5-S	0	SM	Restricted visual tree assessment due to being on the motorway embankment.	None	10+	C1	42.6	3.7	
T121	Ash	M(a)	8.5	140	130									N	—	2	1.5	2	2	1.0-S	0.5	SM	Restricted visual tree assessment due to being on the motorway embankment.	None	10+	C1	16.5	2.3	
T122	Oak	S	9	360										N	—	5	5	3	5	2.0-N	1	EM	Restricted visual tree assessment due to being on the motorway embankment. Flail on the western aspect.	None	20+	B1	58.6	4.3	
T123	Oak	S	9	550										N	—	4	5.5	6	6	1.5-S	1.5	M	Deadwood in the crown, flail on the western aspect.	None	20+	B1	136.9	6.6	
T124	Oak	M(a)	9.5	440	410									N	—	7	6	7	6	1.5-S	1	M	Fused branch on north aspect at 3m. Deadwood in the crown and flail on western aspect.	Axis to inform landowner of the trees condition and seek removal of the dead and damaged branches.	20+	B1	163.7	7.2	
T125	Hawthorn	M(a)	6	200	170	130	100							N	—	3.5	2	3	1	1.0-N	0.5	M	Flail on the western aspect.	None	10+	C2	43.3	3.7	
T126	Oak	S	8	390										N	—	6.5	5	6.5	5	1.0-S	1	EM	Restricted visual tree assessment due to being on the motorway embankment. Flail on western aspect. Significant minor deadwood in the crown.	None	10+	C1	68.8	4.7	



Tree Ref No.	Species	Single or Multiple Stem (S or M)	Height (m)	Stem Diameter										Very Large Girth (Y / N)	Ancient, Veteran or Notable (A, V or N)	Branch Spread				Crown Clearance		Life Stage	General Observations (structural / physiological condition)	Preliminary Management Recommendations	Estimated Remaining Contribution (years)	Tree Quality Grading	Root Protection Area	
				(mm)												(m)				(m)							m ²	radius in m
				S1	S2	S3	S4	S5	S6	S7	S8	S9	S10			N	E	S	W	(1)	(2)							
T127	Sycamore	M(b)	8.5	230	210	270	230	170	90	290				N	—	6	6	6	4.5	0.5-S	0	EM	Flail on western aspect to 4m, and deadwood in the crown. Abrasion against fence.	None	10+	C1	143.5	6.8
T128	Oak	S	10	460										N	—	6.5	5	6.5	6	1.5-S	0.5	EM	Deadwood in the crown, flail on western aspect and broken branches.	Axis to inform landowner of the trees condition and seek removal of the dead and damaged branches.	20+	B1	95.7	5.5
T129	Oak	S	8.5	260										N	—	5	5	1	4.5	4.0-N	2	SM	Tree is being suppressed on the southern aspect by T128.	None	10+	C1	30.6	3.1
T130	Oak	S	11	470										N	—	5	5	6	6	1.0-S	1	M	Minor deadwood in the crown, flail on western aspect.	None	20+	B1	99.9	5.6
T131	Oak	S	6.5	230										N	—	2.5	3.5	4	3.5	1.5-S	1	Y	Restricted visual tree assessment due to being on the motorway embankment. Suppressed on north aspect with some deadwood in the crown.	None	10+	C1	23.9	2.8
T132	Oak	S	8	500										N	—	6.5	5.5	6.5	5.5	1.0-N	1	M	Stunted growth in the crown. Flail on western aspect and minor deadwood in the crown.	None	20+	B1	113.1	6.0
T133	Oak	S	12	450										N	—	6	6	7	6	0.5-E	0	EM	Restricted visual tree assessment due to being on the motorway embankment. Minor deadwood, flail on western aspect.	None	20+	B1	91.6	5.4
T134	Oak	S	15	880										N	—	8	9	8.5	7	5.0-S	2	M	Black staining on north aspect at 6m. Stem bark peeling away at 2.5 -3m, hanging branch on western aspect, and deadwood in the crown.	Axis to inform landowner to seek further advice to assess structural integrity of the tree.	20+	B1	350.4	10.6
H135	Elm, Blackthorn, Hazel, Hawthorn	M(a)	4	110	100	90	80	75						N	—	1.5	1.5	1.5	1.5	0-S	0	Y	Maintained boundary hedgerow.	None	10+	C2	19.1	2.5
T136	Oak	S	15	940										N	—	8	7	8.5	7	3.0-E	2	M	Ivy clad with severed vines at 0.5m on northern aspect.	None	20+	B1	399.8	11.3
T137	Field Maple	S	6	170										N	—	2	2	2	2	4.0-E	4	SM	An emergent tree from the hedgerow, with minor deadwood in the crown.	None	10+	C1	13.1	2.0
T138	Oak	S	5	220										N	—	4	4	2	3.5	1.5-S	1	SM	Restricted visual tree assessment due to being on the motorway embankment. Poor form.	None	10+	C1	21.9	2.6
T139	Oak	S	7.5	280										N	—	3	4.5	5	3.5	3.0-S	1.5	SM	Restricted visual tree assessment due to being on the motorway embankment. Hanging branch and deadwood in the crown, flail on western aspect.	Axis to inform landowner of the trees condition and seek removal of the dead and damaged branches.	10+	C1	35.5	3.4
T140	Oak	S	4.5	280										N	—	4	4	3.5	2.5	1.5-E	1	SM	Restricted visual tree assessment due to being on the motorway embankment. Tree is dying.	Axis to inform landowner of the trees condition and seek removal.	<10	U	35.5	3.4
T141	Oak	S	7.5	250										N	—	5	4	5	4	1.0-W	1	SM	Restricted visual tree assessment due to being on the motorway embankment. Deadwood in the crown.	None	10+	C1	28.3	3.0
T142	Oak	S	6	250										N	—	5.5	4.5	3	4	2.0-N	1.5	SM	Restricted visual tree assessment due to being on the motorway embankment. Tree is in decline.	Axis to inform landowner of the trees condition and seek removal.	<10	U	28.3	3.0
T143	Oak	S	6	120										N	—	2	2	2	4	1.0-S	1	SM	Restricted visual tree assessment due to being on the motorway embankment. Minor deadwood in the crown.	None	10+	C1	6.5	1.4
T144	Oak	S	3.5	110										N	—	2	2	2	2	1.0-W	0.5	SM	Restricted visual tree assessment due to being on the motorway embankment. Tree is being suppressed.	None	10+	C1	5.5	1.3
T145	Oak	S	8	300										N	—	4	4	4.5	4.5	1.0-S	0.5	SM	Restricted visual tree assessment due to being on the motorway embankment. Minor deadwood in the crown.	None	10+	C1	40.7	3.6
T146	Oak	S	4.5	80										N	—	0.5	1	3	3	1.0-S	0.5	Y	Restricted visual tree assessment due to being on the motorway embankment. Tree is being suppressed on northern aspect.	None	10+	C1	2.9	1.0
T147	Oak	M(a)	8.5	360	180									N	—	6	5	6	4.5	1.0-S	0.5	EM	Restricted visual tree assessment due to being on the motorway embankment. Deadwood in the crown, flail on western aspect.	None	20+	B1	73.3	4.8
T148	Oak	S	6.5	340										N	—	5	3.5	5	2.5	1.5-S	0.5	EM	Restricted visual tree assessment due to being on the motorway embankment. Deadwood in the crown, flail on western aspect.	None	10+	C1	52.3	4.1
T149	Oak	S	7	210										N	—	2.5	2.5	4.5	4.5	1.0-N	0.5	SM	Restricted visual tree assessment due to being on the motorway embankment. Minor deadwood in the crown.	None	10+	C1	20.0	2.5
T150	Oak	S	8.5	360										N	—	6.5	6.5	5.5	5.5	1.5-S	0.5	EM	Restricted visual tree assessment due to being on the motorway embankment. Deadwood in the crown, flail on western aspect.	None	20+	B1	58.6	4.3
T151	Oak	S	8	350										N	—	5	3	5.5	5.5	1.0-S	0.5	EM	Restricted visual tree assessment due to being on the motorway embankment. Minor deadwood in the crown.	None	20+	B1	55.4	4.2
T152	Hawthorn	M(a)	5	160	110	110	100	80						N	—	3	3	3	3	0.5-S	1	EM	Restricted visual tree assessment due to being on the motorway embankment. Minor deadwood in the crown.	None	10+	C1	30.0	3.1
T153	Oak	S	7.5	390										N	—	6	4.5	7	6	1.0-S	0.5	EM	Restricted visual tree assessment due to being on the motorway embankment. Minor deadwood in the crown. Stunted growth.	None	20+	B1	68.8	4.7
T154	Oak	S	3	190										N	—	2.5	1.5	5	0.5	0.5-N	0.5	SM	Restricted visual tree assessment due to being on the motorway embankment. Measurements taken at 1m under branch flail. Tree is dying.	Axis to inform landowner of the trees condition and seek removal.	<10	U	16.3	2.3
G155	Hawthorn, Oak, Cherry, Apple	M(a)	6	180	150	120	100	75						N	—	4	4	4	4	0.5-S	0	SM	Restricted visual tree assessment due to being on the motorway embankment. The measurements taken are representative of the group.	None	10+	C2	38.4	3.5
T156	Oak	S	6.5	240										N	—	5.5	5	5	2	1.5-W	0.5	SM	Restricted visual tree assessment due to being on the motorway embankment. Tree is dying.	Axis to inform landowner of the trees condition and seek removal.	<10	U	26.1	2.9
T157	Oak	M(a)	9	370	230	180	210							N	—	6.5	4	7	6.5	1.0-S	0.5	SM	Restricted visual tree assessment due to being on the motorway embankment. Poor form due to competition from surrounding trees.	None	10+	C1	120.5	6.2
T158	Oak	M(a)	8	310	220	180								N	—	6.5	6	4	5.5	1.0-N	1	EM	Restricted visual tree assessment due to being on the motorway embankment. Flail on western aspect.	None	10+	C1	80.0	5.0



Tree Ref No.	Species	Single or Multiple Stem (S or M)	Height (m)	Stem Diameter										Very Large Girth (Y / N)	Ancient, Veteran or Notable (A, V or N)	Branch Spread				Crown Clearance		Life Stage	General Observations (structural / physiological condition)	Preliminary Management Recommendations	Estimated Remaining Contribution (years)	Tree Quality Grading	Root Protection Area		
				(mm)												(m)				(m)							m ²	radius in m	
				S1	S2	S3	S4	S5	S6	S7	S8	S9	S10			N	E	S	W	(1)	(2)								
G159	Oak	S	11	300											N	—	4.5	4.5	4.5	4.5	1.5-S	1.5	SM	The measurements taken are representative of the group.	None	20+	B2	40.7	3.6
T160	Ash	M(b)	16	200	160	160	180	120	150						N	—	7	5.5	5.5	3	0.5-N	1	EM	Crown dieback mostly on the south western aspect.	None	10+	C1	71.0	4.8
T161	Ash	M(a)	16	190	700										N	—	8	9	8.5	7.5	1.0-N	1.5	M	Previous pruning has been undertaken. Some signs of Ash Dieback with some deadwood and cavities in the crown.	Axis to inform landowner of the trees condition and seek further arboricultural advice.	10+	C1	238.0	8.7
H162	Hawthorn, Blackthorn	M(a)	2	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T163	Ash	M(a)	11	230	280	250									N	—	6	7.5	6	6	3.0-W	2.5	EM	Minor deadwood and some broken branches in the crown.	None	20+	B1	87.7	5.3
T164	Elm	S	12	240											N	—	4	5.5	4	4.5	3.5-E	3	SM	Restricted visual tree assessment due to hedgerow and dense undergrowth.	None	20+	B1	26.1	2.9
T165	Oak	S	13	670											N	—	8	9	8	5.5	5.0-E	3	M	Abrading and fused branches. Deadwood in the crown.	None	20+	B1	203.1	8.0
T166	Oak	S	13	650											N	—	8	6	7	7	3.5-W	2	M	Deadwood in the crown, slightly suppressed by T165 on eastern aspect.	None	20+	B1	191.2	7.8
T167	Ash	S	18	810											N	—	10	8.5	8.5	7.5	3.0-S	2.5	M	Fallen fungal fruiting body on floor, with signs of Ash Dieback. Deadwood in the crown and ivy clad which has been severed.	Axis to advise landowner to seek further advice to assess structural integrity of the tree.	20+	B1	296.9	9.7
T168	Oak	S	6.5	240											N	—	4	4	4	4	4.0-E	3	SM	Restricted visual tree assessment due to hedgerow.	None	10+	C1	26.1	2.9
T169	Oak	S	5.5	130											N	—	1.5	0.5	2	2	3.5-E	2.5	Y	Restricted visual tree assessment due to hedgerow.	None	10+	C1	7.6	1.6
T170	Ash	S	7	230											N	—	4	4.5	4	4	3.0-W	2	SM	Restricted visual tree assessment due to hedgerow. Ivy clad.	None	10+	C1	23.9	2.8
T171	Oak	S	15	650											N	—	6	7	7.5	8	2.5-S	3.5	M	Historic central stem failure and deadwood in the crown. Restricted visual tree assessment due to barbed wire fence and hedgerow.	None	20+	B1	191.2	7.8
G172	Hawthorn	M(a)	4.5	110	100	90	80	75							N	—	2	2	2	2	0.5-S	1	Y	No significant defects at the time of the survey.	None	10+	C2	19.1	2.5
G173	Field Maple	M(a)	4	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
G174	Field Maple, Hawthorn, Elder	M(a)	4	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
G175	Hawthorn	M(a)	4	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
G176	Hazel, Elder	M(a)	4	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T177	Holly	M(a)	7	150	80	75	120	100							N	—	4.5	2	3	2	0.5-S	0	SM	Maintained on east and western aspects as part of the hedgerow.	None	10+	C1	26.7	2.9
G178	Hawthorn	M(a)	4	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
G179	Hawthorn	M(a)	4	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
G180	Hawthorn	M(a)	4	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
G181	Hawthorn	M(a)	4	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
G182	Blackthorn, Hawthorn	M(a)	4	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
H183	Field Maple, Hawthorn	M(a)	4	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T184	Field Maple	M(a)	11	200	180	150	120	100							N	—	5	4	2.5	4	2.0-N	3.5	SM	Restricted visual tree assessment due to hedgerow. No significant defects at the time of the survey.	None	10+	C1	54.0	4.1
T185	Field Maple	M(b)	11	210	200	180	140	120	90	90	80	75	75	N	—	5	4	3.5	4.5	2.5-E	3.5	SM	Restricted visual tree assessment due to hedgerow. No significant defects at the time of the survey.	None	10+	C1	71.8	4.8	
T186	Field Maple	M(a)	10	330	180										N	—	4.5	3	2	4	2.0-N	3.5	SM	Restricted visual tree assessment due to hedgerow. No significant defects at the time of the survey.	None	10+	C1	63.9	4.5
T187	Ash	S	11	260											N	—	4	5	3	2	2.5-W	4	SM	Restricted visual tree assessment due to hedgerow. No significant defects at the time of the survey.	None	10+	C1	30.6	3.1
T188	Field Maple	M(a)	10	210	200	150	180	170							N	—	4.5	4.5	4	4	3.0-S	3	SM	Restricted visual tree assessment due to hedgerow. No significant defects at the time of the survey.	None	10+	C1	76.0	4.9
T189	Ash	S	8.5	350											N	—	4.5	4.5	4.5	4.5	2.5-E	2	SM	Restricted visual tree assessment due to hedgerow. No significant defects at the time of the survey.	None	10+	C1	55.4	4.2
T190	Field Maple	M(a)	9	220	210	190	140	170							N	—	3.5	3.5	3.5	3.5	2.0-S	4	SM	Restricted visual tree assessment due to hedgerow. No significant defects at the time of the survey.	None	10+	C1	80.1	5.0



Tree Ref No.	Species	Single or Multiple Stem (S or M)	Height (m)	Stem Diameter (mm)										Very Large Girth (Y / N)	Ancient, Veteran or Notable (A, V or N)	Branch Spread				Crown Clearance (m)		Life Stage	General Observations (structural / physiological condition)	Preliminary Management Recommendations	Estimated Remaining Contribution (years)	Tree Quality Grading	Root Protection Area	
				G1	G2	G3	G4	G5	G6	G7	G8	G9	G10			N	E	S	W	(1)	(2)						(m²)	(radius in m)
T191	Field Maple	S	8.5	230										N	—	2.5	3.5	3.5	3.5	2.5-S	3	SM	Restricted visual tree assessment due to hedgerow. No significant defects at the time of the survey.	None	10+	C1	23.9	2.8
T192	Oak	S	19	1250										Y	N	11	9	9.5	9	2.0-N	2	M	Due to girth size this tree has been identified as locally notable. Very minor deadwood in the crown.	None	40+	A1	707.0	15.0
H193	Field Maple, Hawthorn	M(a)	4	110	100	90	80	75						N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T194	Field Maple	M(a)	9	180	180	160	150							N	—	4.5	4.5	4.5	4.5	2.0-S	2.5	SM	Restricted visual tree assessment. No significant defects at the time of the survey.	None	10+	C1	51.1	4.0
T195	Field Maple	M(b)	10	200	190	170	160	140	140	130	110	100	90	N	—	4.5	4.5	4.5	4.5	3.0-E	3	SM	Restricted visual tree assessment. No significant defects at the time of the survey.	None	10+	C1	92.5	5.4
T196	Field Maple	M(b)	10	220	230	160	250	250	80					N	—	5	5	5	5	2.5-S	3.5	SM	Abrading branches.	None	10+	C1	106.8	5.8
T197	Oak	S	9	230										N	—	3	3.5	2.5	3.5	2.5-S	4	SM	Restricted visual tree assessment. No significant defects at the time of the survey.	None	10+	C1	23.9	2.8
T198	Field Maple	M(b)	10	210	200	160	130	80	120					N	—	5	4.5	3.5	4.5	2.0-E	4	SM	Restricted visual tree assessment. No significant defects at the time of the survey.	None	10+	C1	61.1	4.4
T199	Field Maple	M(a)	10	210	190	210	100	110						N	—	4.5	4.5	4.5	4.5	1.5-W	2.5	SM	Restricted visual tree assessment. No significant defects at the time of the survey.	None	20+	C1	66.2	4.6
T200	Oak	S	16	720										N	—	9	8	8.5	7	2.0-N	2	M	Restricted visual tree assessment due to dense undergrowth. Black staining coming from main stem union at 8m, previous pruning has been undertaken and deadwood in the crown.	None	10+	B1	234.5	8.6
G201	Field Maple	M(a)	12	210	200	200	190	130						N	—	5	4	5	5	2.5-S	3	SM	No significant defects at the time of the survey. The measurements taken are representative of the group.	None	10+	C2	80.1	5.0
T202	Oak	S	14	870										N	—	5	5	4.5	5	2.0-W	1	M	Hollowed stem, major cavities and cracks, with missing bark all over. Tree is dying.	Axis to advise landowner to seek further advice to assess structural integrity and possible removal of the tree.	<10	U	342.5	10.4
G203	Field Maple, Oak	M(a)	11	190	190	130	110	80						N	—	4	4	4	4	2.0-N	2.5	SM	No significant defects at the time of the survey.	None	10+	C2	42.5	3.7
G204	Field Maple	M(a)	10	110	100	90	80	75						N	—	3	3	3	3	1.5-W	3.5	SM	No significant defects at the time of the survey.	None	10+	C2	19.1	2.5
T205	Ash	S	8	200										N	—	4	3.5	2	1.5	1.5-W	1.5	SM	No significant defects at the time of the survey.	None	10+	C1	18.1	2.4
T206	Ash	S	13	350										N	—	6	6	5.5	5	4.0-W	3	EM	Restricted visual tree assessment due to hedgerow. Signs of Ash Dieback.	Axis to inform landowner of the trees condition and seek further arboricultural advice.	10+	C1	55.4	4.2
H207	Blackthorn, Hawthorn, Hazel, Walnut	M(a)	3	110	100	90	80	75						N	—	1.5	1.5	1.5	1.5	0-S	0	SM	Undulating boundary hedgerow with gaps. The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
H208	Blackthorn, Hawthorn	M(a)	2.5	110	100	90	80	75						N	—	1.5	1.5	1.5	1.5	0-S	0	SM	Undulating boundary hedgerow with gaps. The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T209	Field Maple	S	7	280										N	—	4.5	4	4.5	5	3.0-S	3	EM	Tree is dying.	Axis to inform landowner of the trees condition and seek removal.	<10	U	35.5	3.4
T210	Ash	S	11	260										N	—	4	4	3.5	3.5	4.0-N	3	SM	Restricted Visual Tree Assessment due to growing in the hedgerow. Cavity at 7m on north aspect. Broken branches and deadwood in the crown. Minor epicormic growth.	None	10+	C1	30.6	3.1
T211	Oak	S	2	1210										N	—	10	11	11	7	2.0-E	0.5	M	Historical large limb failure on western aspect resulting in an open cavity with signs of decay.	Axis to advise landowner to seek further advice to assess structural integrity of the tree.	20+	B1	662.4	14.5
H212	Ash, Hawthorn, Field Maple, Hazel, Dogwood	M(a)	4	110	100	90	80	75						N	—	1.5	1.5	1.5	1.5	0.5-S	0	SM	Measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T213	Oak	S	8	220										N	—	4.5	3	3.5	3	1.5-S	2	SM	Flail damage on east aspect. Minor deadwood in the crown.	None	10+	C1	21.9	2.6
T214	Oak	S	9	630										N	—	8	5	7.5	6	2.0-W	2	M	Slightly stunted form, previous pruning has been undertaken, and some minor deadwood.	None	20+	B1	179.6	7.6
T215	Oak	S	16	790										N	—	9	10	11	9	2.5-S	2	M	Fused branches, with minimal deadwood and some small pruning cuts.	None	40+	A1	282.4	9.5
T216	Oak	S	9	270										N	—	4	4	3	3	2.0-N	2.5	SM	Restricted visual tree assessment due to hedgerow. Minimal deadwood.	None	10+	C1	33.0	3.2
G217	Field Maple, Ash	S	9	200										N	—	4	4.5	4.5	4	2.5-N	3	SM	Restricted visual tree assessment. No significant defects at the time of the survey..	None	10+	C2	18.1	2.4
T218	Oak	S	7	320										N	—	5.5	4.5	4.5	5	1.5-S	2.5	SM	Flail damage on stem and broken branches in the crown.	None	10+	C1	46.3	3.8
T219	Ash	S	5.5	150										N	—	4	2.5	2	2	3.0-N	3	SM	Flail damage on stem on eastern aspect.	None	10+	C1	10.2	1.8
T220	Oak	S	4.5	110										N	—	2	1	1	1	1.0-S	1	Y	No significant defects at the time of the survey	None	10+	C1	5.5	1.3
T221	Oak	S	4	90										N	—	1	1	1	1.5	2.0-E	1.5	Y	Stem damage up to 0.5m on northern aspect.	None	10+	C1	3.7	1.1
T222	Oak	S	5.5	120										N	—	1.5	1.5	1.5	1.5	2.0-W	2	Y	No significant defects at the time of the survey	None	10+	C1	6.5	1.4



Tree Ref No.	Species	Single or Multiple Stem (S or M)	Height (m)	Stem Diameter										Very Large Girth (Y / N)	Ancient, Veteran or Notable (A, V or N)	Branch Spread				Crown Clearance		Life Stage	General Observations (structural / physiological condition)	Preliminary Management Recommendations	Estimated Remaining Contribution (years)	Tree Quality Grading	Root Protection Area		
				(mm)												(m)				(m)							(m²)	(radius in m)	
				S1	S2	S3	S4	S5	S6	S7	S8	S9	S10			N	E	S	W	(1)	(2)								
T223	Oak	S	5	110											N	—	2.5	3	1.5	1.5	2.5-W	2.5	Y	No significant defects at the time of the survey	None	10+	C1	5.5	1.3
T224	Oak	S	8	140											N	—	4	4	1.5	1.5	4.0-N	4	Y	No significant defects at the time of the survey	None	10+	C1	8.9	1.7
T225	Oak	S	7.5	180											N	—	4	4	3.5	3.5	3.5-S	3	Y	No significant defects at the time of the survey	None	10+	C1	14.7	2.2
T226	Field Maple	S	7	130											N	—	2.5	2.5	2.5	2.5	0.5-E	0	Y	No significant defects at the time of the survey	None	10+	C1	7.6	1.6
T227	Oak	S	4.5	120											N	—	2.5	2.5	3	2.5	2.0-E	1.5	Y	No significant defects at the time of the survey	None	10+	C1	6.5	1.4
T228	Field Maple	S	5	100											N	—	1.5	1.5	1.5	1.5	2.0-S	2	Y	No significant defects at the time of the survey	None	10+	C1	4.5	1.2
T229	Oak	S	3.5	120											N	—	3	4	3	4	2.0-W	1	Y	No significant defects at the time of the survey. Tree has a stunted form.	None	10+	C1	6.5	1.4
T230	Oak	S	3.5	90											N	—	1	2	1	1	2.0-E	1	Y	No significant defects at the time of the survey. Tree has a stunted form.	None	10+	C1	3.7	1.1
T231	Oak	S	3.5	110											N	—	1.5	2.5	1.5	1.5	2.0-E	1.5	Y	No significant defects at the time of the survey	None	10+	C1	5.5	1.3
T232	Field Maple	S	4	110											N	—	2	2	2	2	0.5-E	0	Y	No significant defects at the time of the survey	None	10+	C1	5.5	1.3
T233	Oak	S	5	130											N	—	2	2	2	2	1.5-W	1	Y	No significant defects at the time of the survey	None	10+	C1	7.6	1.6
T234	Oak	S	5	140											N	—	3	3	2	1.5	2.0-S	2	Y	No significant defects at the time of the survey	None	10+	C1	8.9	1.7
T235	Oak	S	5.5	160											N	—	3.5	3	2	3	1.5-W	1	Y	No significant defects at the time of the survey	None	10+	C1	11.6	1.9
T236	Field Maple	S	6	130											N	—	2	2	2	2	3.0-S	3	Y	No significant defects at the time of the survey	None	10+	C1	7.6	1.6
T237	Oak	S	5	140											N	—	2.5	2.5	2.5	2.5	2.5-N	1	Y	No significant defects at the time of the survey	None	10+	C1	8.9	1.7
T238	Oak	S	5	130											N	—	2.5	2.5	2.5	2.5	2.5-S	1.5	Y	No significant defects at the time of the survey	None	10+	C1	7.6	1.6
T239	Oak	S	6.5	190											N	—	4	4	3.5	3.5	3.0-W	3	Y	No significant defects at the time of the survey	None	10+	C1	16.3	2.3
T240	Field Maple	S	4.5	120											N	—	1.5	1.5	2	1.5	2.5-S	2	Y	No significant defects at the time of the survey	None	10+	C1	6.5	1.4
T241	Oak	S	6	170											N	—	3	3	2	2.5	2.5-S	1	Y	No significant defects at the time of the survey	None	10+	C1	13.1	2.0
T242	Oak	S	3	100											N	—	1.5	1.5	1.5	1.5	1.5-N	0.5	Y	No significant defects at the time of the survey	None	10+	C1	4.5	1.2
T243	Field Maple	S	5	220											N	—	3	4	2.5	2.5	2.5-N	2	Y	No significant defects at the time of the survey	None	10+	C1	21.9	2.6
T244	Oak	S	4.5	100											N	—	1	1	1	0.5	2.5-E	2	Y	No significant defects at the time of the survey	None	10+	C1	4.5	1.2
T245	Oak	S	4.5	110											N	—	2	2	2	2	2.5-E	2	Y	No significant defects at the time of the survey	None	10+	C1	5.5	1.3
T246	Oak	S	5.5	120											N	—	2	3	2	2	2.5-E	2	Y	No significant defects at the time of the survey	None	10+	C1	6.5	1.4
T247	Field Maple	S	5.5	110											N	—	3	3	3	3	2.5-S	2	Y	No significant defects at the time of the survey	None	10+	C1	5.5	1.3
T248	Oak	S	4.5	110											N	—	2	1.5	1.5	1.5	2.0-S	1.5	Y	No significant defects at the time of the survey	None	10+	C1	5.5	1.3
T249	Beech	S	4	110											N	—	1	1	1	1	1.5-N	1	Y	No significant defects at the time of the survey	None	10+	C1	5.5	1.3
G250	Hazel, Dogwood, Field Maple	M(a)	6	110	100	90	80	75							N	—	1.5	1.5	1.5	1.5	0.5-S	0	Y	No significant defects at the time of the survey	None	10+	C2	19.1	2.5
T251	Ash	M(b)	11	190	100	170	200	110	120	180					N	—	5.5	5	4	5.5	1.0-E	0.5	SM	No significant defects at the time of the survey	None	10+	C1	74.0	4.9
H252	Ash, Hawthorn, Sycamore, Elm	M(a)	3	110	100	90	80	75							N	—	1	1	1	1	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T253	Ash	S	12	200											N	—	5.5	4	1	3	3.0-N	2	SM	Restricted visual tree assessment due to hedgerow.	None	10+	C1	18.1	2.4
T254	Holly	M(a)	12	300	350	380									N	—	5	5	5.5	5.5	0.5-W	4	M	Restricted visual tree assessment due to hedgerow.	None	10+	C1	161.5	7.2



Tree Ref No.	Species	Single or Multiple Stem (S or M)	Height (m)	Stem Diameter (mm)										Very Large Girth (Y / N)	Ancient, Veteran or Notable (A, V or N)	Branch Spread (m)				Crown Clearance (m)		Life Stage	General Observations (structural / physiological condition)	Preliminary Management Recommendations	Estimated Remaining Contribution (years)	Tree Quality Grading	Root Protection Area		
																											(m ²)	(radius in m)	
				G1	G2	G3	G4	G5	G6	G7	G8	G9	G10			N	E	S	W	(1)	(2)								
T255	Willow	S	10	400											N	—	6.5	6	4	5.5	2.0-N	2	M	Restricted visual tree assessment due to hedgerow.	None	20+	B1	72.4	4.8
G256	Cypress	M(a)	21	550	480										N	—	5.5	5.5	5.5	5.5	1.0-S	1	M	Restricted visual tree assessment due to hedgerow.	None	10+	C2	241.1	8.8
G257	Field Maple, Ash Fir, Sycamore	M(a)	12	250	220	180									N	—	4.5	4.5	4.5	4.5	1.5-N	1	SM	Restricted visual tree assessment due to hedgerow.	None	10+	C2	64.8	4.5
G258	Sycamore	S	23	650											N	—	8	8	8	9	5.0-E	4	M	Restricted visual tree assessment due to hedgerow. The measurements taken are representative of the group.	None	40+	A2	191.2	7.8
G259	Hawthorn, Box, Elm, Sycamore	M(a)	9	220	170	150									N	—	4.5	4.5	4.5	4.5	1.0-S	2	SM	Restricted visual tree assessment due to hedgerow. Dead trees present within the group.	None	10+	C2	45.2	3.8
T260	Oak	S	18	800											N	—	6	5.5	5.5	9	1.0-S	1	OM	Tree is in decline. Ivy clad.	Axis to inform landowner of the trees condition and seek further arboricultural advice.	10+	C1	289.6	9.6
T261	Oak	S	18	1150											N	—	10	10	10	10	4.5-N	2	M	Good condition, Ivy clad with small broken branch and minimal deadwood.	None	40+	A1	598.4	13.8
T262	Field Maple	S	14	430											N	—	6	6	5	6	4.0-S	2	M	Tree is fused into the barbed wire fence. Previous pruning has been undertaken and Ivy has been severed.	None	20+	B1	83.7	5.2
G263	Hazel	M(a)	9	110	100	90	80	75							N	—	4	4	4	4	0-S	1	SM	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
G264	Hazel	M(a)	9	110	100	90	80	75							N	—	4	4	4	4	0-S	1	SM	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T265	Sycamore	M(a)	17	600	300										N	—	7	8	7	5	3.0-E	3	M	Previous pruning has been undertaken. Stem damage on western at 1m. Ivy clad with severed vines. Stems are fused at 0.5-2m.	None	20+	B1	203.6	8.0
G266	Field Maple	S	15	370											N	—	5.5	1.5	4.5	4	1.0-S	2.5	M	Stem damage on the east at 1.5m. Measurement taken is representative of the group.	None	20+	B2	61.9	4.4
H267	Hawthorn, Ash	M(a)	4	110	100	90	80	75							N	—	1	1	1	1	0.5-S	0	Y	Managed boundary hedgerow. The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
G268	Ash, Fir, Willow, Sycamore	S	15	500											N	—	8	8	8	8	1.5-W	2	EM	Restricted visual tree assessment. The measurements taken are representative of the group.	None	20+	B2	113.1	6.0
T269	Oak	S	17	980											N	—	8	7.5	10	8	2.5-W	1.5	M	Restricted visual tree assessment. Other side of barbed wire fence. Central stem at 14m dead and other deadwood.	Axis to advise landowner to seek further advice to assess structural integrity of the tree.	20+	B1	434.5	11.8
H270	Blackthorn, Elder	M(a)	4	110	100	90	80	75							N	—	1	1	1	1	0.5-S	0	Y	Managed boundary hedgerow. The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T271	Oak	S	22	1100											N	—	8	10	11	8	2.5-S	2.5	M	Restricted visual tree assessment due to barbed wire fence. Deadwood and branch split at 12m on east, previous pruning has been undertaken.	Axis to inform landowner of the trees condition and seek removal of the dead and damaged branches.	20+	B1	547.5	13.2
H272	Hawthorn, Blackthorn	M(a)	4	110	100	90	80	75							N	—	1	1	1	1	0.5-S	0	Y	Maintained hedgerow, measurements taken are representative of the group.	None	10+	C2	19.1	2.5
T273	Oak	S	22	1125											N	—	7	10	12	8	3.0-S	2	M	Restricted visual tree assessment. Large central stem failure at 11m. Deadwood in the crown.	None	20+	B1	572.6	13.5
G274	Elder, Hawthorn	M(a)	4.5	110	100	90	80	75							N	—	1.5	1	1.5	1	0.5-S	0	SM	Restricted visual tree assessment and measurements taken are representative of the group. No significant defects at time of survey.	None	10+	C2	19.1	2.5
T275	Oak	S	16	830											N	—	7.5	6	5	6	3.0-N	2	M	Restricted visual tree assessment due to barbed wire fence. Deadwood in the crown and previous pruning has been undertaken.	None	20+	B1	311.7	10.0
H276	Hawthorn, Elder, Field Maple, Hazel	M(a)	5	110	100	90	80	75							N	—	1	1	1	1	0.5-S	0	Y	Maintained hedgerow.	None	10+	C1	19.1	2.5
T277	Oak	S	18	1050											N	—	8	8.5	9	8	2.5-S	2	M	Restricted visual tree assessment due to barbed wire fence. Deadwood in the crown and a large branch missing bark at 8m north.	None	20+	B1	498.8	12.6
H278	Hawthorn, Elder, Field Maple, Hazel	M(a)	5	110	100	90	80	75							N	—	1	1	1	1	0.5-S	0	Y	Maintained hedgerow.	None	10+	C1	19.1	2.5
W279	Ash, Field Maple, Cypress, Hawthorn	S	16	460											N	—	7	7	7	7	1.0-S	0.5	EM	The measurements taken are representative of the group. Hawthorn forms the wooded area understorey. Some deadwood in the crowns.	None	20+	B2	95.7	5.5
T280	Oak	S	21	1080											N	—	8	10	9	10	2.5-W	1	M	Minimum deadwood in the crown and previous pruning. Small cavity east at 1m, likely caused by woodpeckers.	None	40+	A1	527.7	13.0
T281	Field Maple	M(a)	10	520	220										N	—	4.5	4	4.5	4.5	1.0-S	1	M	Minimum deadwood in the crown.	None	20+	B1	144.2	6.8
H282	Hawthorn, Hazel	M(a)	5	110	100	90	80	75							N	—	1	1	1	1	0.5-S	0	Y	The measurements taken are representative of the group. Some deadwood in the crowns.	None	10+	C2	19.1	2.5
H283	Laurel	M(a)	2.5	110	100	90	80	75							N	—	1	1	1	1	0.5-S	0	Y	The measurements taken are representative of the group. Maintained hedgerow.	None	10+	C2	19.1	2.5
T284	Field Maple	S	9	340											N	—	4	3	4	3.5	0-W	1	EM	Ivy clad and minimum deadwood in the crown.	None	20+	B1	52.3	4.1
G285	Hawthorn, Lime, Hazel, Sycamore	M(a)	7	120	110	100	90	80							N	—	2	2	2	2	0.5-N	0	SM	The measurements taken are representative of the group.	None	10+	C2	23.1	2.7
T286	Sycamore	S	11	450											N	—	7	7.5	7	7	3.0-N	3	EM	Minimum deadwood in the crown.	None	20+	B1	91.6	5.4



Tree Ref No.	Species	Single or Multiple Stem (S or M)	Height (m)	Stem Diameter										Very Large Girth (Y / N)	Ancient, Veteran or Notable (A, V or N)	Branch Spread				Crown Clearance		Life Stage	General Observations (structural / physiological condition)	Preliminary Management Recommendations	Estimated Remaining Contribution (years)	Tree Quality Grading	Root Protection Area			
				(mm)												(m)				(m)							(1)	(2)	m ²	radius in m
				S1	S2	S3	S4	S5	S6	S7	S8	S9	S10			N	E	S	W											
T287	Sycamore	S	12	300											N	—	5	5	5	3.5	4.0-W	6.5	SM	Minimum deadwood in the crown. Suppressed on the west side.	None	10+	B1	40.7	3.6	
T288	Sycamore	S	8.5	310											N	—	3	3	5	4	3.0-N	2	SM	Deadwood in the crown and broken branches on the north at 2m and 3m.	Axis to inform landowner of the trees condition and seek removal of the dead and damaged branches.	20+	C1	43.5	3.7	
T289	Ash	M(A)	10	440	130										N	—	6	6	6	5	1.0-S	0.5	EM	No significant defects at the time of the survey.	None	10+	B1	95.2	5.5	
T290	Sycamore	S	9	350											N	—	5	5.5	5.5	4	2.0-S	1.5	SM	Cavity on western stem from 1-2m which is occluding well.	None	10+	C1	55.4	4.2	
T291	Lime	S	11	380											N	—	5	5	5.5	5.5	3.0-W	1	SM	Minimum previous pruning. Mirrors are bolted to stem. Soil is banked up to the stem.	None	10+	C1	65.3	4.6	
T292	Horse Chestnut	S	11	480											N	—	6	6	6	6	0.5-E	1	EM	Deadwood in the crown and cavity on stem at 1m south.	Axis to advise landowner of trees condition to seek further advice to assess structural integrity of the tree.	10+	C1	104.2	5.8	
G293	Hawthorn, Ash	S	12	180											N	—	4	4	4	4	1.5-N	2	Y	The measurements taken are representative of the group. Some individuals are ivy clad.	None	10+	C2	14.7	2.2	
G294	Yew, Cherry, Box	S	11	470											N	—	6	6	6	6	2.0-W	4	M	Restricted visual tree assessment due to being sited on private land. The measurements taken are representative of the group.	None	20+	B2	99.9	5.6	
G295	Cypress	S	11	240											N	—	3	3	3	3	1.0-W	0.5	EM	Restricted visual tree assessment due to being sited on private land. The measurements taken are representative of the group.	None	10+	C2	26.1	2.9	
G296	Beech, Ash	S	15	620											N	—	8	8	8	8	1.0-N	1.5	M	Restricted visual tree assessment due to being sited on private land. Ash is ivy clad. The measurements taken are representative of the group.	None	20+	B2	173.9	7.4	
G297	Ash, Cherry	M(A)	6	110	100	90	80	75							N	—	2	2	2	2	0.5-S	1	Y	Restricted Visual tree assessment due to being on private land. The measurements taken are representative of the group.	None	10+	C2	19.1	2.5	
G298	Elm, Ash, Field Maple	S	11	320											N	—	4.5	4.5	4.5	4.5	1.0-S	0.5	EM	Restricted visual tree assessment due to being on private land. The measurements taken are representative of the group.	None	10+	C2	46.3	3.8	
T299	Fig	M(A)	4	90	90	80	75	75							N	—	3	3	3	3.5	0.5-S	0	SM	Restricted visual tree assessment due to being on private land. The measurements taken are representative of the group.	None	10+	C1	15.3	2.2	
T300	Pear	S	11	330											N	—	3.5	4	4	4	2.5-N	2	EM	Ivy clad.	None	20+	B1	49.3	4.0	
T301	Swedish Whitebeam	S	5.5	240											N	—	3	3	3	3	2.0-N	1.5	SM	Previous pruning work has been undertaken.	None	10+	C1	26.1	2.9	
T302	Ash	M(A)	10	140	190										N	—	4	4	4	4	3.0-W	2	SM	Ivy clad.	None	10+	C1	25.2	2.8	
T303	Field Maple	S	10	260											N	—	5	5	5	5	2.0-S	4	EM	Restricted visual tree assessment due to growing in hedge.	None	20+	B1	30.6	3.1	
G304	Pear	S	11	290											N	—	4	4	4.5	4	2.0-E	2	SM	The measurements taken are representative of the group.	None	20+	B2	38.1	3.5	
G305	Pear, Swedish Whitebeam	S	10	260											N	—	2	2	2	2	0.5-S	0	SM	The measurements taken are representative of the group.	None	10+	C2	30.6	3.1	
H306	Cypress, Cherry	M(A)	4	110	100	90	80	75							N	—	1	1	1	1	0.5-S	0	SM	Restricted Visual tree assessment due to being on private land. The measurements taken are representative of the group.	None	10+	C2	19.1	2.5	
G307	Cherry, Hawthorn, Ash	S	11	290											N	—	5	5	5	5	1.5-S	0.5	SM	Restricted visual tree assessment due to being on private land. The measurements taken are representative of the group. Minimum previous pruning.	None	20+	B2	38.1	3.5	
H308	Laurel, Beech	M(A)	3	110	100	90	80	75							N	—	1	1	1	1	0.5-S	0	SM	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5	
H309	Cypress	M(A)	4	110	100	90	80	75							N	—	1	1	1	1	0.5-S	1	SM	The measurements taken are representative of the group. Growing behind retaining wall.	None	10+	C2	19.1	2.5	
G310	Yew, Sycamore, Norway Maple, Laurel, Lime	S	12	310											N	—	6	6	6	6	1.0-S	2	EM	Restricted visual tree assessment due to being on private land. The measurements taken are representative of the group. Some individuals are ivy clad.	None	20+	B2	43.5	3.7	
G311	Cherry, Fig, Cypress	M(A)	7	180	160	110	80								N	—	4	4	4	4	1.5-S	1	SM	Restricted visual tree assessment due to being on private land. The measurements taken are representative of the group.	None	10+	C2	34.6	3.3	
G312	Ash, Sycamore	S	6	100											N	—	3	3	3	3	1.0-S	1	Y	The measurements taken are representative of the group.	None	10+	C2	4.5	1.2	
G313	Holly	S	3	80											N	—	1	1	1	1	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	2.9	1.0	
G314	Hawthorn	M(A)	5	110	100	90	80	75							N	—	2	2	2	2	0.5-S	0	SM	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5	
T315	Yew	S	8	550											N	—	5	5	5	5	1.0-S	1.5	EM	Growing in raised bed.	None	20+	B1	136.9	6.6	
G316	Lime, Cherry, Sycamore	M(A)	11	250	230										N	—	6	6	6	6	2.0-W	1.5	EM	The measurements taken are representative of the group. Some previous pruning work around overhead cables.	None	20+	B2	52.2	4.1	
T317	Fir	S	20	380											N	—	5	5	5	5	4.0-S	3	EM	Restricted visual tree assessment due to being on private land. The measurements taken are representative of the group.	None	20+	B1	65.3	4.6	
G318	Lime, Sycamore	M(B)	13	300	170	190	220	180	240	120	210				N	—	5	5	5	5	2.0-N	1.5	EM	The measurements taken are representative of the group. Restricted visual tree assessment due to being sited on private land. Some individuals are ivy clad.	None	20+	B2	150.3	6.9	



Tree Ref No.	Species	Single or Multiple Stem (S or M)	Height (m)	Stem Diameter										Very Large Girth (Y / N)	Ancient, Veteran or Notable (A, V or N)	Branch Spread				Crown Clearance		Life Stage	General Observations (structural / physiological condition)	Preliminary Management Recommendations	Estimated Remaining Contribution (years)	Tree Quality Grading	Root Protection Area		
				(mm)												(m)				(m)							(m²)	(radius in m)	
				S1	S2	S3	S4	S5	S6	S7	S8	S9	S10			N	E	S	W	(1)	(2)								
G319	Lime	S	16	480											N	—	5	5	5	5	4.0-N	4	M	The measurements taken are representative of the group.	None	20+	B2	104.2	5.8
G320	Norway Maple, Laurel, Swedish Whitebeam	S	12	250											N	—	4	4	4	4	2.5-N	2	SM	Restricted visual tree assessment due to being on private land. The measurements taken are representative of the group.	None	20+	B2	28.3	3.0
G321	Sycamore	S	18	500											N	—	6	6	6	6	1.5-E	2	M	Restricted visual tree assessment due to being on private land. The measurements taken are representative of the group. Ivy clad.	None	20+	B2	113.1	6.0
G322	Sycamore	S	6	160											N	—	2	2	2	2	1.0-S	1	Y	The measurements taken are representative of the group.	None	10+	C2	11.6	1.9
G323	Sycamore, Horse Chestnut, Lime	S	20	700											N	—	5.5	5.5	5.5	5.5	1.0-S	0	M	Restricted visual tree assessment due to being on private land. The measurements taken are representative of the group.	None	20+	B2	221.7	8.4
G324	Sycamore, Ash, Cherry	S	14	320											N	—	6	6	6	6	3.0-W	1	EM	The measurements taken are representative of the group.	None	20+	B2	46.3	3.8
T325	Horse Chestnut	S	21	950											N	—	6	6	8	7	10.0-S	5	M	Restricted visual tree assessment due to being on private land, Ivy clad.	None	40+	A1	408.3	11.4
T326	Horse Chestnut	S	23	1200											N	—	5	6	8	11	7.0-W	3.5	M	Restricted visual tree assessment due to being on private land, Ivy clad.	None	40+	A1	651.5	14.4
G327	Horse Chestnut	S	21	900											N	—	7	7	7	7	2.0-E	1	M	Restricted visual tree assessment due to being on private land. The measurements taken are representative of the group. One tree has sustained large limb failure at 10m east.	None	20+	B2	366.5	10.8
G328	Cherry, Sycamore, Hawthorn, Ash	S	12	350											N	—	6	6	6	6	1.0-S	1	EM	The measurements taken are representative of the group, some trees are Ivy clad.	None	20+	B2	55.4	4.2
G329	Hawthorn, Ash, Sycamore	M(a)	10	220	170	110	90	75							N	—	5	5	5	5	0.5-S	0	SM	Roadside hedgerow with emergent trees. Some trees are Ivy clad with some deadwood in the crown. The measurements taken are representative of the group.	None	20+	B2	46.7	3.9
H330	Laurel	M(a)	1.5	110	100	90	80	75							N	—	1	1	1	1	0.5-S	0	Y	Restricted visual tree assessment due to being on private land and measurements taken are representative of the group.	None	10+	C2	19.1	2.5
G331	Sycamore, Pine, Lime	S	15	450											N	—	6	6	6	6	2.0-S	1	EM	Restricted visual tree assessment and measurements taken are representative of the group.	None	20+	B2	91.6	5.4
G332	Sycamore	S	21	900											N	—	10	10	10	10	7.0-S	4	M	Restricted visual tree assessment and measurements taken are representative of the group. Ivy clad.	None	40+	A2	366.5	10.8
G333	Sycamore	S	22	880											N	—	8	8	9	8	5.0-E	3	M	Ivy clad.	None	40+	A2	350.4	10.6
G334	Ash, Sycamore, Sweet Chestnut	S	18	600											N	—	7	7	7	7	2.0-S	2	EM	Restricted visual tree assessment and measurements taken are representative of the group. Some individuals are Ivy clad.	None	20+	B2	162.9	7.2
G335	Ash, Sycamore	S	18	570											N	—	6	6	6	6	2.0-E	2	EM	Restricted visual tree assessment and measurements taken are representative of the group. Some individuals are Ivy clad.	None	20+	B2	147.0	6.8
G336	Ash, Sycamore, Cherry, Oak	S	16	350											N	—	6	6	6	6	1.5-S	1	EM	Restricted visual tree assessment and measurements taken are representative of the group. Some individuals are Ivy clad.	None	20+	B2	55.4	4.2
G337	Ash, Sycamore, Cherry, Oak	S	16	350											N	—	6	6	6	6	1.5-S	1	EM	Restricted visual tree assessment and measurements taken are representative of the group. Some individuals are Ivy clad.	None	20+	B2	55.4	4.2
G338	Ash, Field Maple	S	8	120											N	—	4	4	4	4	1.0-S	0.5	Y	The measurements taken are representative of the group.	None	10+	C2	6.5	1.4
G339	Ash, Sycamore	S	20	650											N	—	7	7	7	7	1.5-W	1	M	Restricted visual tree assessment and measurements taken are representative of the group.	None	20+	B2	191.2	7.8
G340	Oak	S	17	620											N	—	8	8	8	8	3.0-E	3	M	Restricted visual tree assessment and measurements taken are representative of the group. Ivy clad.	None	20+	B2	173.9	7.4
G341	Ash, Oak	S	18	700											N	—	10	10	10	10	3.0-S	4	M	Restricted visual tree assessment and measurements taken are representative of the group.	None	20+	B2	221.7	8.4
G342	Ash, Oak	S	17	590											N	—	8	8	8	8	2.0-E	1.5	M	Restricted visual tree assessment and measurements taken are representative of the group.	None	20+	B2	157.5	7.1
G343	Ash, Hawthorn, Field Maple	S	8	250											N	—	4	4	4	4	1.0-S	0	EM	The measurements taken are representative of the group.	None	10+	C2	28.3	3.0
T344	Oak	S	13	1100											N	—	6	6	7	7	2.0-S	1	M	Previous pruning has been undertaken; Ivy clad with deadwood in the crown.	None	20+	B1	547.5	13.2
G345	Ash, Elm	M(a)	10	110	100	90	80	75							N	—	2	2	2	2	0.5-S	0	SM	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
G346	Field Maple, Ash, Sycamore	M(a)	10	150	120	110	90	80							N	—	3	3	3	3	0.5-S	0	SM	The measurements taken are representative of the group.	None	10+	C2	28.7	3.0
T347	Oak	S	15	1000											N	—	6	6	6	6	3.0-S	2	M	Restricted visual tree assessment due to being on private land, Ivy clad.	None	20+	B1	452.4	12.0
T348	Oak	S	12	960											N	—	5.5	5.5	5.5	5.5	4.0-S	2	M	Restricted visual tree assessment due to being on private land, Ivy clad.	None	20+	B1	417.0	11.5
T349	Oak	S	17	1100											N	—	7	8	8	7	2.0-E	3	M	Restricted visual tree assessment due to being on private land, Ivy clad.	None	20+	B1	547.5	13.2
T350	Oak	S	16	1200											N	—	8	8	8	8	4.0-N	2	M	Restricted visual tree assessment due to being on private land, Ivy clad.	None	20+	B1	651.5	14.4



Tree Ref No.	Species	Single or Multiple Stem (S or M)	Height (m)	Stem Diameter (mm)										Very Large Girth (Y / N)	Ancient, Veteran or Notable (A, V or N)	Branch Spread (m)				Crown Clearance (m)		Life Stage	General Observations (structural / physiological condition)	Preliminary Management Recommendations	Estimated Remaining Contribution (years)	Tree Quality Grading	Root Protection Area	
																N	E	S	W	(1)	(2)							
				S1	S2	S3	S4	S5	S6	S7	S8	S9	S10															(m² / m)
G351	Ash, Sycamore, Hawthorn, Elder	S	14	300										N	—	6	6	6	6	1.0-S	0	EM	Restricted visual tree assessment and measurements taken are representative of the group.	None	20+	B2	40.7	3.6
G352	Horse Chestnut, Cypress, Ash, Laurel	S	12	220										N	—	5	5	5	5	2.0-S	1	SM	Restricted visual tree assessment and measurements taken are representative of the group.	None	20+	B2	21.9	2.6
H353	Hawthorn, Elm	M(a)	3	110	100	90	80	75						N	—	1	1	1	1	0.5-S	0	Y	The measurements taken are representative of the group.	None	10+	C2	19.1	2.5
G354	Sycamore, Hawthorn	M(a)	8	150	130	100	90	75						N	—	4	4	4	4	1.0-S	0	SM	Restricted visual tree assessment and measurements taken are representative of the group.	None	10+	C2	28.6	3.0
G355	Lime	S	21	600										N	—	7	7	7	7	2.0-S	1	M	Restricted visual tree assessment and measurements taken are representative of the group.	None	20+	B2	162.9	7.2
G356	Field Maple, Oak	S	14	420										N	—	5	5	5	5	1.5-S	1	EM	Restricted visual tree assessment and measurements taken are representative of the group.	None	20+	B2	79.8	5.0

BS 5837
Tree Survey Schedule

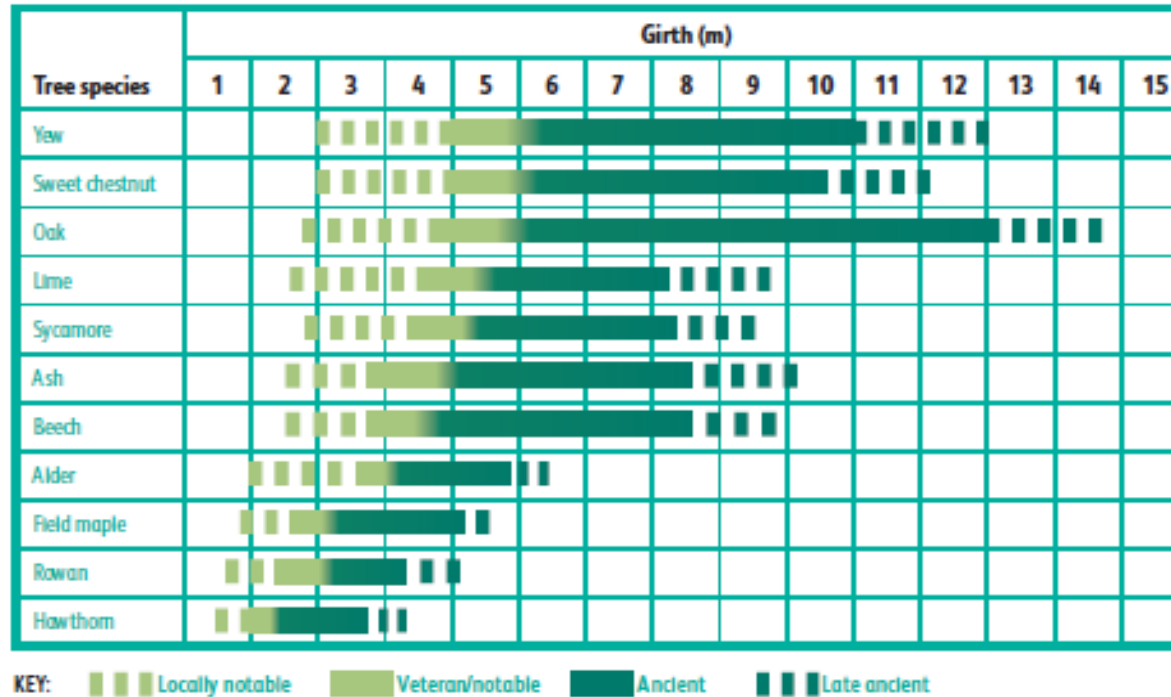


Fig 1.3: Chart of girth in relation to age and developmental classification of trees*

Tree No.	Step 2 - Additional Primary Features (y/n)				Step 3 - Secondary Features (y/n)									Step 4
	Extensive Decay, esp. brown rot or exposed heartwood	Extensive hollowing	Crown senescence	Retrenchment	Large quantity of deadwood, esp. large-sized	Major Storm Damage/ breakout wounds	Habitat Spaces: decay holes and/ or crevices/ branch splits sheltered from direct rainfall	Aerial rooting	Sap run/ slime flux	Water Pool	Bark loss inc. due to lightning strike	Fungi	Other epiphytic plants, inc. significant presence of lichens	Status (A, V, N)
T63	n	n	n	y	y	y	y	n	n	n	n	n	n	V

Notes:

Step 1 - Size Assessment (on survey sheet): Very large girth for species (if not stop assessment here)

Step 2 - Additional Primary Features: At least one should be present or refer to Step 3

Step 3 - Secondary Features: If no additional Primary Feature is present, tree should have at least four Secondary Features

Step 4: Identification Guide:

Ancient (A) - Veteran tree with extremely large girth: age likely >50% of estimated species maximum (*e.g. pedunculata oak, 2m stem dia. average site: ca. 460 years old, ca. 50% of species max.*)

Veteran (V) - Very large girth for species and qualifies under either Step 2 or Step 3


Notable (N) - Very large girth for species but does not qualify under either Step 2 or Step 3

©Julian Forbes-Laird 2018 www.flac.uk.com


Appendix 6: Tree Protection Barrier

See following page.

Figure 3 Examples of above-ground stabilizing systems

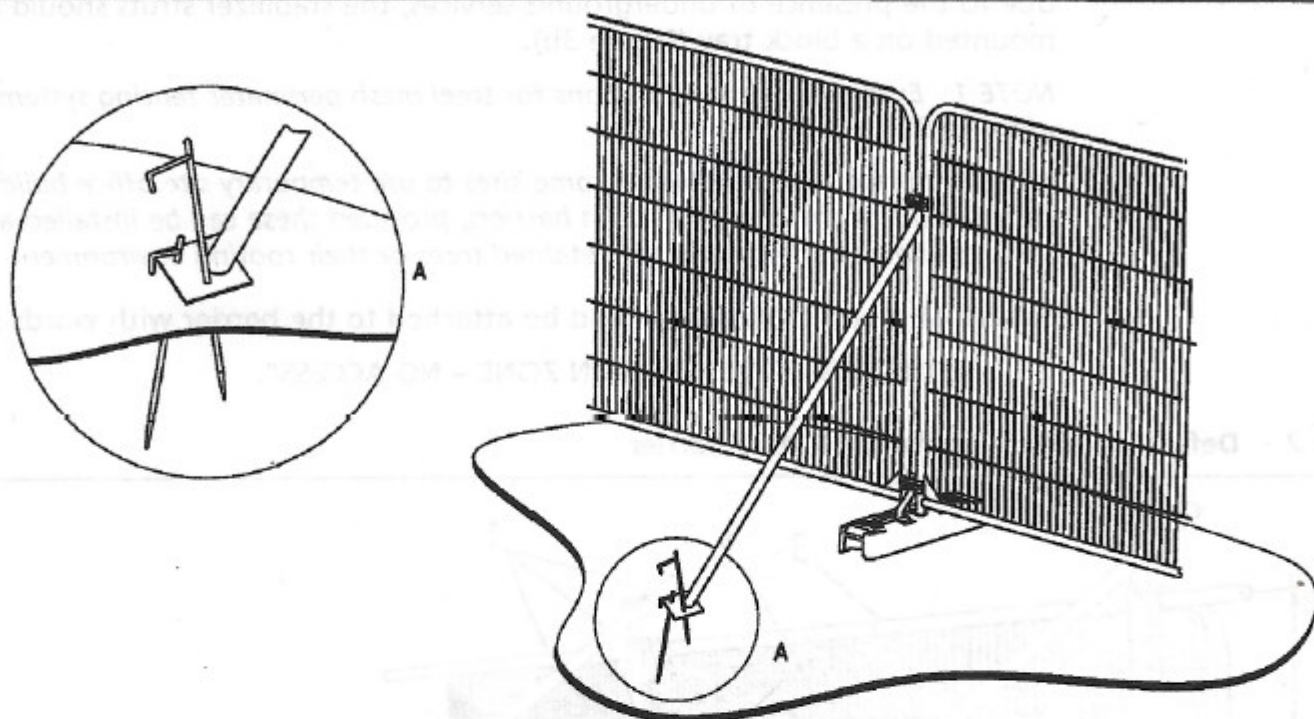

a) Stabilizer strut with base plate secured with ground pins

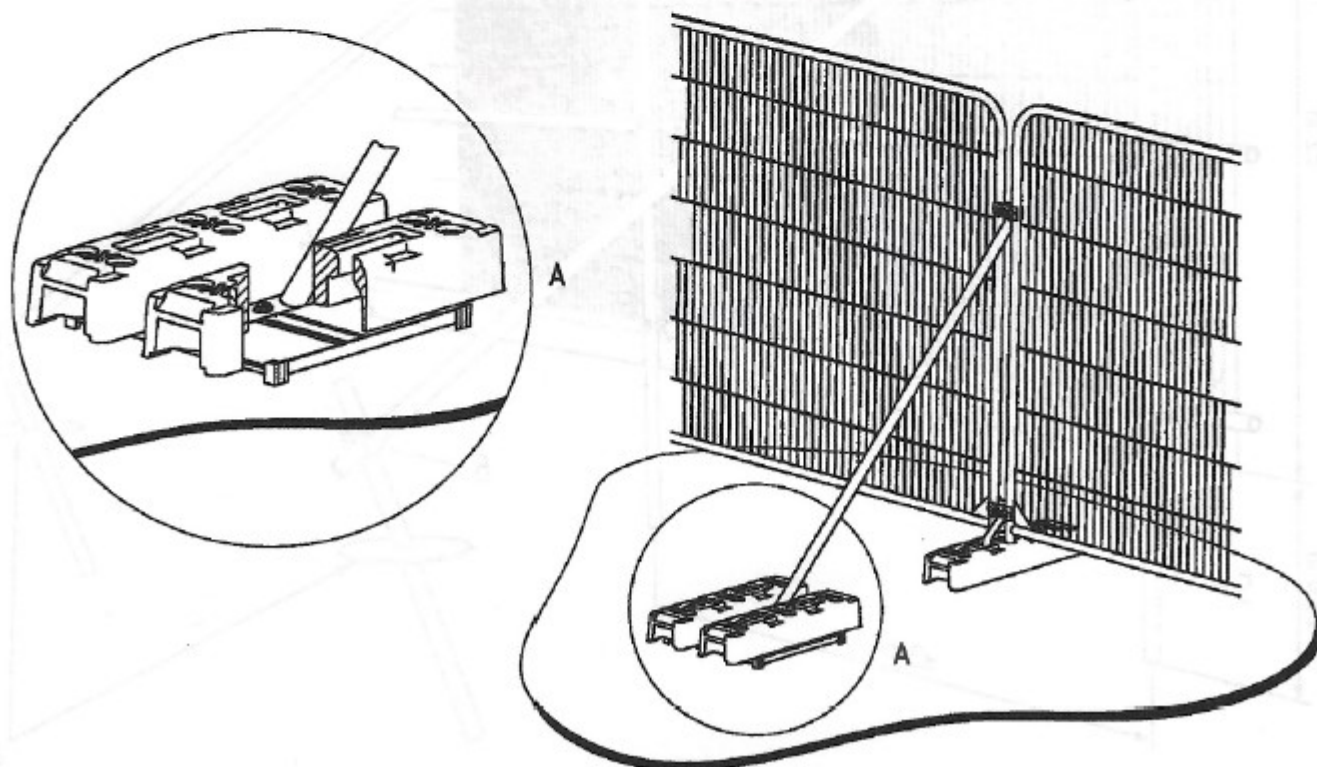

b) Stabilizer strut mounted on block tray

Appendix 7: Tree Protection Barrier Sign

See following page.



**PROTECTIVE FENCING. THIS
FENCING MUST BE
MAINTAINED IN ACCORDANCE
WITH THE APPROVED PLANS
AND DRAWINGS FOR THIS
DEVELOPMENT.**



**TREE PROTECTION AREA
KEEP OUT !**

**(TOWN & COUNTRY PLANNING ACT 1990)
TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY
PLANNING CONDITIONS AND/OR ARE THE SUBJECTS OF A
TREE PRESERVATION ORDER.
CONTRAVENTION OF A TREE PRESERVATION ORDER MAY
LEAD TO CRIMINAL PROSECUTION**

**ANY INCURSION INTO THE PROTECTED AREA MUST BE
WITH THE WRITTEN PERMISSION OF THE LOCAL
PLANNING AUTHORITY**

Appendix 8: RPA Guidance

The Root Protection Area (RPA) is calculated from the stem diameter of the tree, in accordance with the guidance contained in section 4.6 of BS 5837:2012. Where trees have been identified as being either Ancient, Veteran or Notable, then the standing advice has been adopted to provide a 'buffer zone' of 15x the stem diameter.

These areas are normally sacrosanct, and should not be entered, by traffic or foot, during construction, or used to store materials, fuel, or chemicals.

Protective fencing should be erected along the edge of the RPA, before construction begins, and should not be moved until after all construction has finished and vacated the site. The type of fencing used should be fit for purpose, and ordinarily conform to the recommendations given in section 6.2.2 of BS 5837:2012 and be erected similar to the example shown in Figure 2 of the same standard.

Where underground services cannot be routed outside the RPA, these should be installed by trenchless technology, such as a directional drill. Where this technology is used the underground channel created should be no less than 600mm below normal ground level, or the base of the tree. Also, the starting and receiving excavations should not be within the RPA. Drill channel lubricant should be avoided, other than water, unless precautions are taken to prevent contamination of soil and possibly water. Hand digging may be an alternative to trenchless excavation, but this is less desirable, and not always practical.

When determining the workable space around the RPA of a tree or trees, it is also important to maintain a working zone of one metre (which is usually sufficient) between the edge of construction and the protective fencing.

Appendix 9: Contact Details

	Name	Main Contact and Details
Site Details	Priory Farm Solar Array	Graveley Lane Great Wymondley Hitchin Hertfordshire SG4 7HD
Developer	AGR 4 Solar Ltd	Mark Pollard Head of Project Delivery AGR Renewables Ltd E: mark.pollard@agr-group.co.uk
Site Manager	TBC	
Senior Arboricultural and Forestry Consultant	Arno van Heygen	RSK ADAS Limited Battle Gate Road Boxworth CB23 4NN T: 07720 084 078 E: arno.vanheygen@adas.co.uk
Local Authority:	North Hertfordshire Council	Council Offices Gernon Road Letchworth Garden City SG6 3JF T: 01462 474000

Appendix 9: Contact Details

	Name	Main Contact and Details
Site Details	Priory Farm Solar Array	Graveley Lane Great Wymondley Hitchin Hertfordshire SG4 7HD
Developer	AGR 4 Solar Ltd	Mark Pollard Head of Project Delivery AGR Renewables Ltd E: mark.pollard@agr-group.co.uk
Site Manager	TBC	
Senior Arboricultural and Forestry Consultant	Arno van Heygen	RSK ADAS Limited Battle Gate Road Boxworth CB23 4NN T: 07720 084 078 E: arno.vanheygen@adas.co.uk
Local Authority:	North Hertfordshire Council	Council Offices Gernon Road Letchworth Garden City SG6 3JF T: 01462 474000