




- Site boundary
- Bat Box (total = 40)
- Bird Box (each marker represents group of 3; total = 42 boxes)

Bat Box:

Bat boxes will be mounted within the range of eastern, southern or western elevations at a minimum of 5m above ground level (never on the northern elevation). They should be situated in sheltered, wind free areas with clear space in front for flight lines so bats can access the boxes. Bat boxes should be integrated into buildings, such as Habibat 001 bat boxes (shown below: left image) should be used.

Bird Box:

Bird boxes will be mounted within the range of eastern, northern and western elevations of buildings on a gable end or under the eaves (never on the southern elevation). They should be situated in sheltered wind free areas with clear space in front for flight lines so birds can access the boxes. Bird boxes should be installed in groups of three per wall (at least 1m apart) to make them appropriate for swifts to use. Bird boxes should be integrated into buildings; boxes such as Habibat Swift Brick (shown below: right image) should be used.

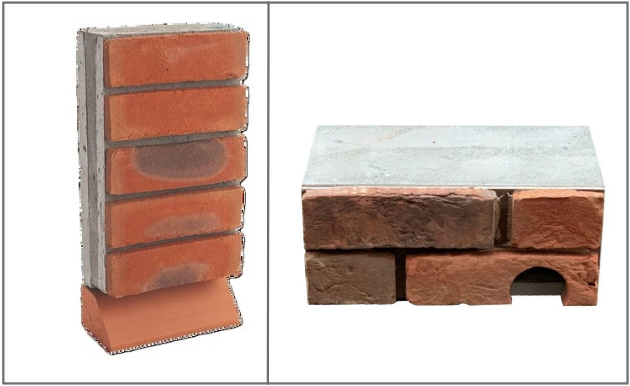

Dixies Barns, High Street,
Ashwell, Hertfordshire SG7 5NT
t 01462 743647
e ashwell@csaenvironmental.co.uk
w csaenvironmental.co.uk

Project	Land East of Talbot Way, Letchworth	Date	May 2026	Drawing No.	CSA/7316/111
Drawing Title	Proposed Habitats Plan	Scale	Refer to scale	Rev	D
Client	Barratt David Wilson Homes (North Thames)	Drawn	RG	Checked	-