


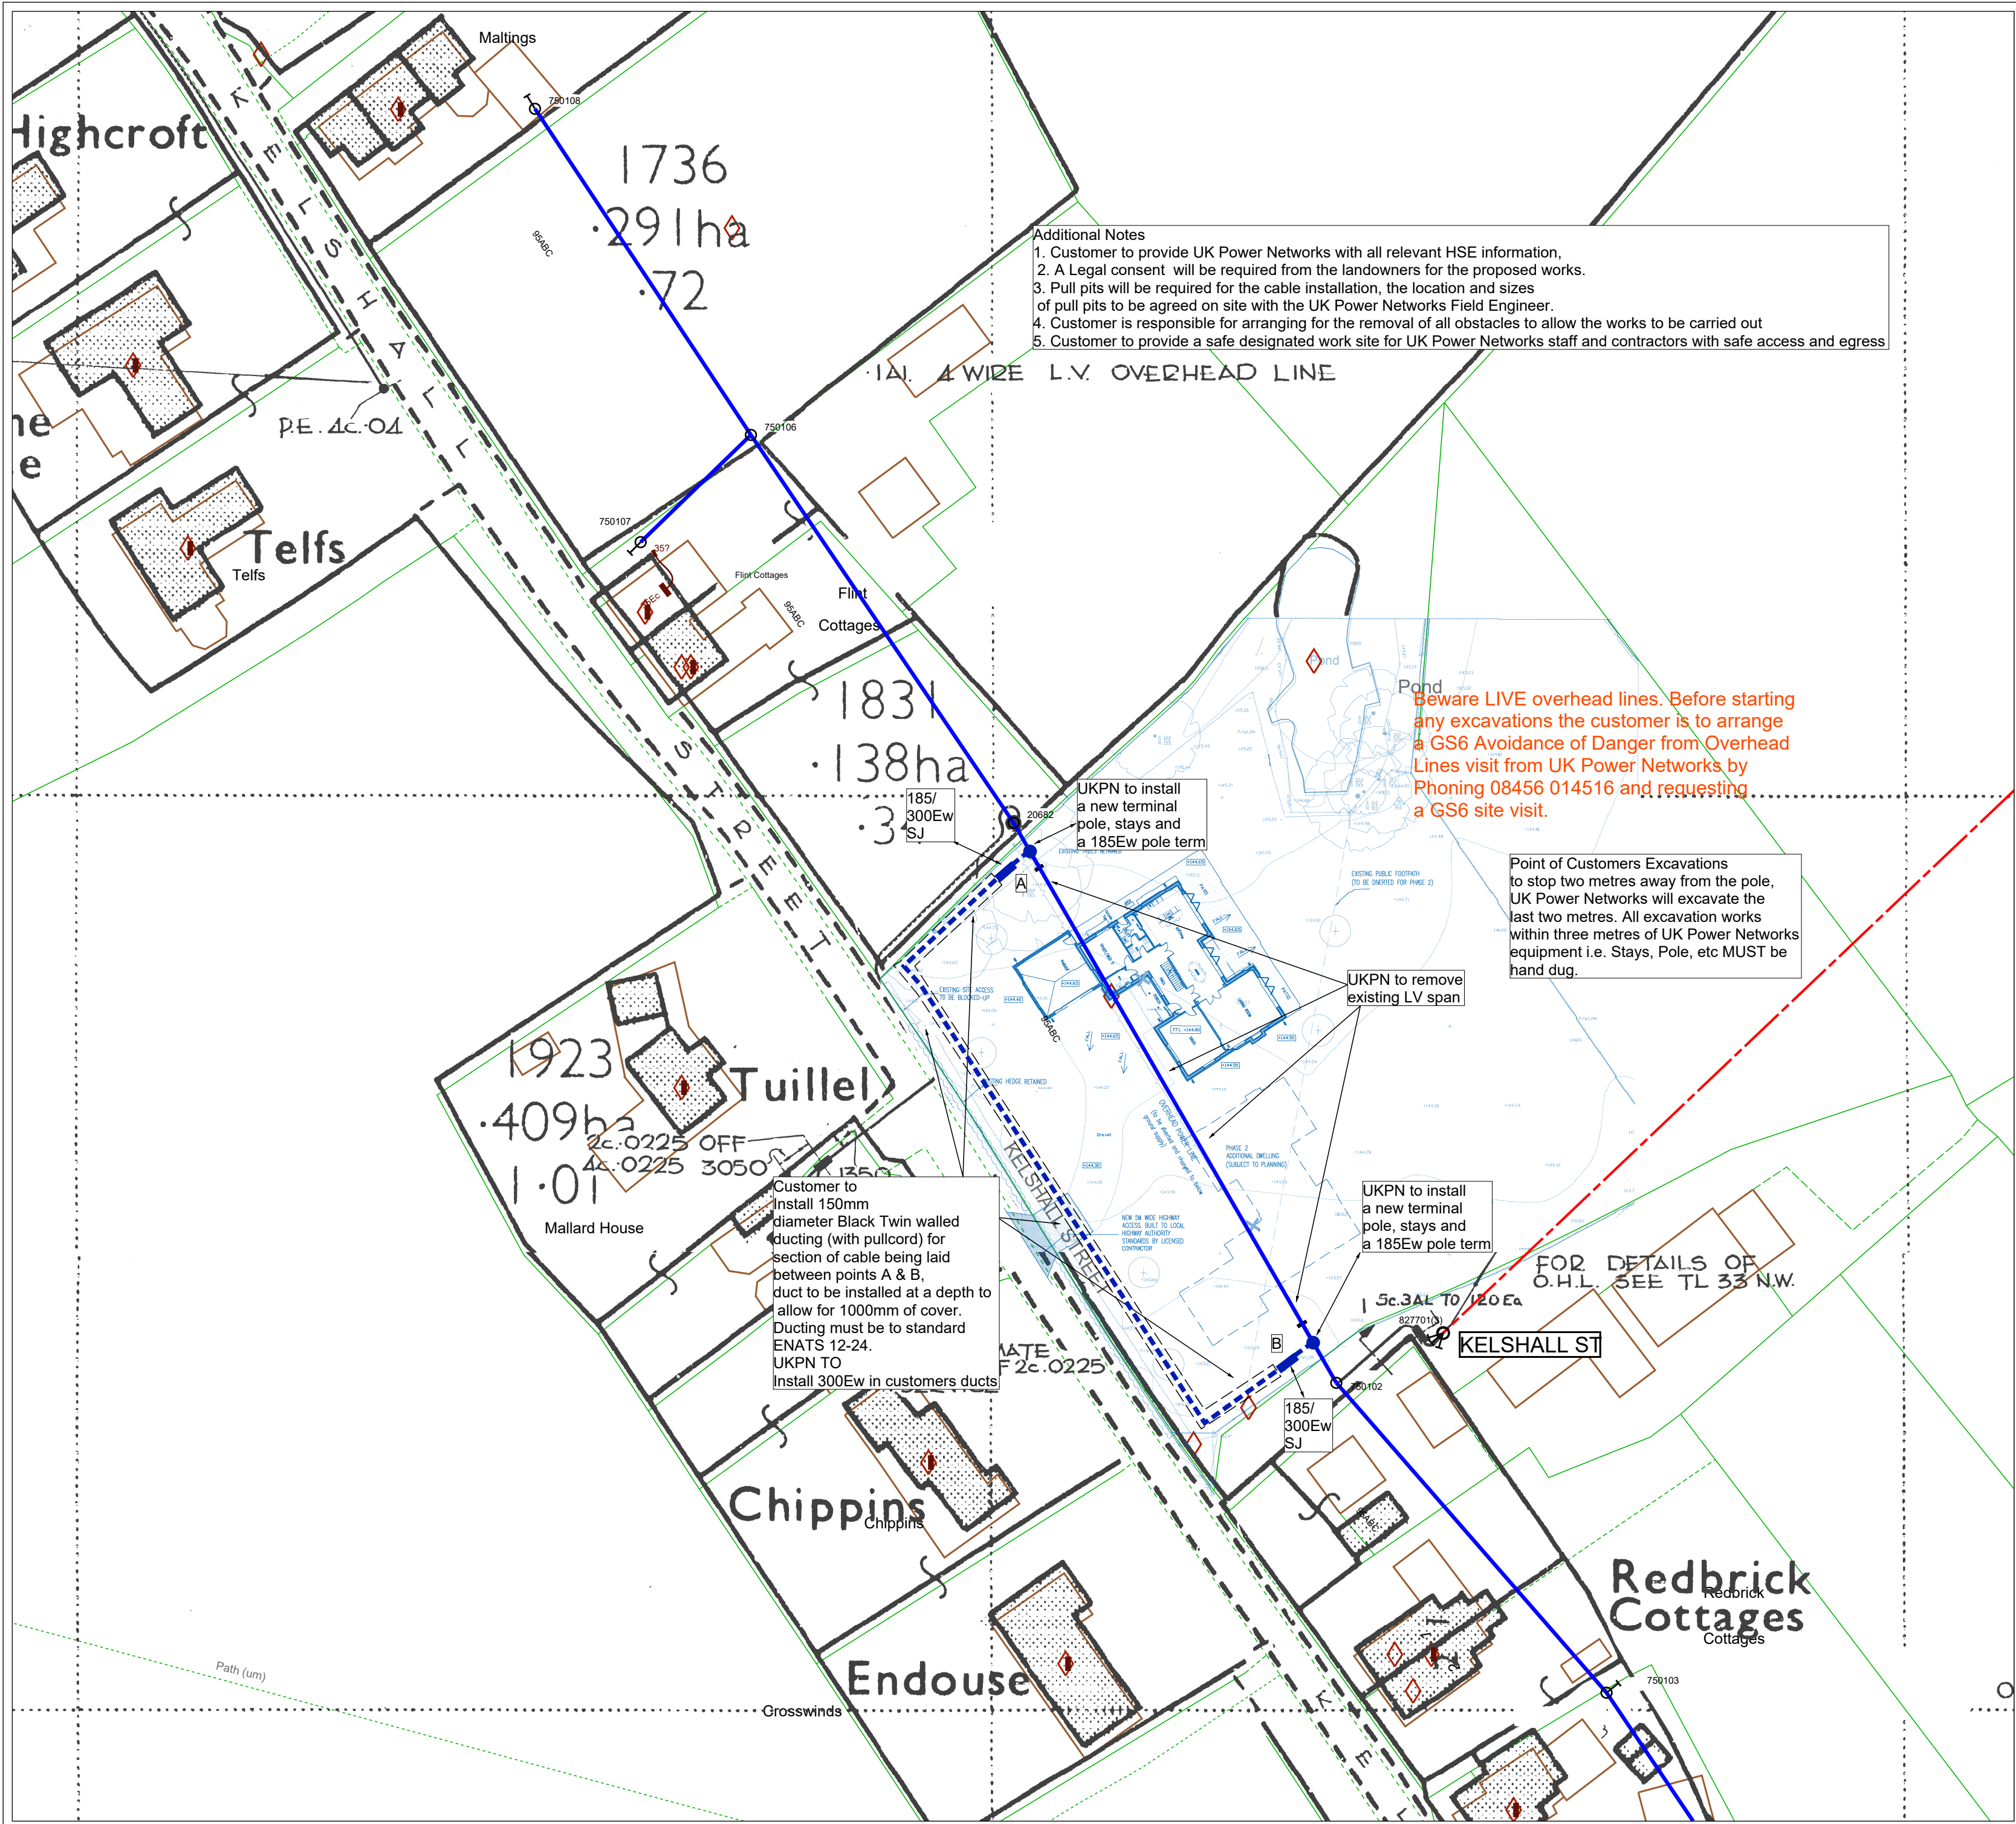

Additional Notes
1. Customer to provide UK Power Networks with all relevant HSE information,
2. A Legal consent will be required from the landowners for the proposed works.
3. Pull pits will be required for the cable installation, the location and sizes of pull pits to be agreed on site with the UK Power Networks Field Engineer.
4. Customer is responsible for arranging for the removal of all obstacles to allow the works to be carried out
5. Customer to provide a safe designated work site for UK Power Networks staff and contractors with safe access and egress

1A. 4 WIRE L.V. OVERHEAD LINE

Beware LIVE overhead lines. Before starting any excavations the customer is to arrange a GS6 Avoidance of Danger from Overhead Lines visit from UK Power Networks by Phoning 08456 014516 and requesting a GS6 site visit.

Point of Customers Excavations to stop two metres away from the pole, UK Power Networks will excavate the last two metres. All excavation works within three metres of UK Power Networks equipment i.e. Stays, Pole, etc MUST be hand dug.

UKPN to remove existing LV span



UKPN to install a new terminal pole, stays and a 185Ew pole term

Customer to Install 150mm diameter Black Twin walled ducting (with pullcord) for section of cable being laid between points A & B, duct to be installed at a depth to allow for 1000mm of cover. Ducting must be to standard ENATS 12-24. UKPN TO Install 300Ew in customers ducts

FOR DETAILS OF O.H.L. SEE TL 33 N.W.

KELSHALL ST

STANDARD CROSS SECTIONS FOR ROAD CROSSINGS

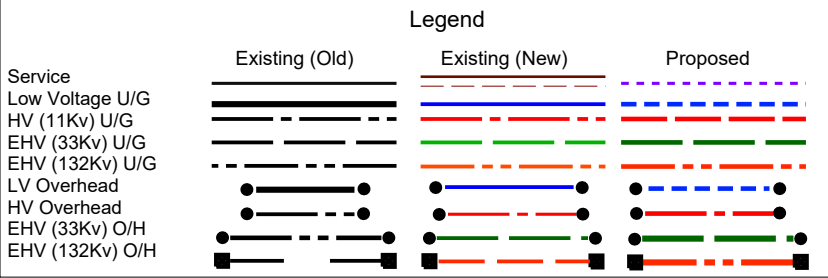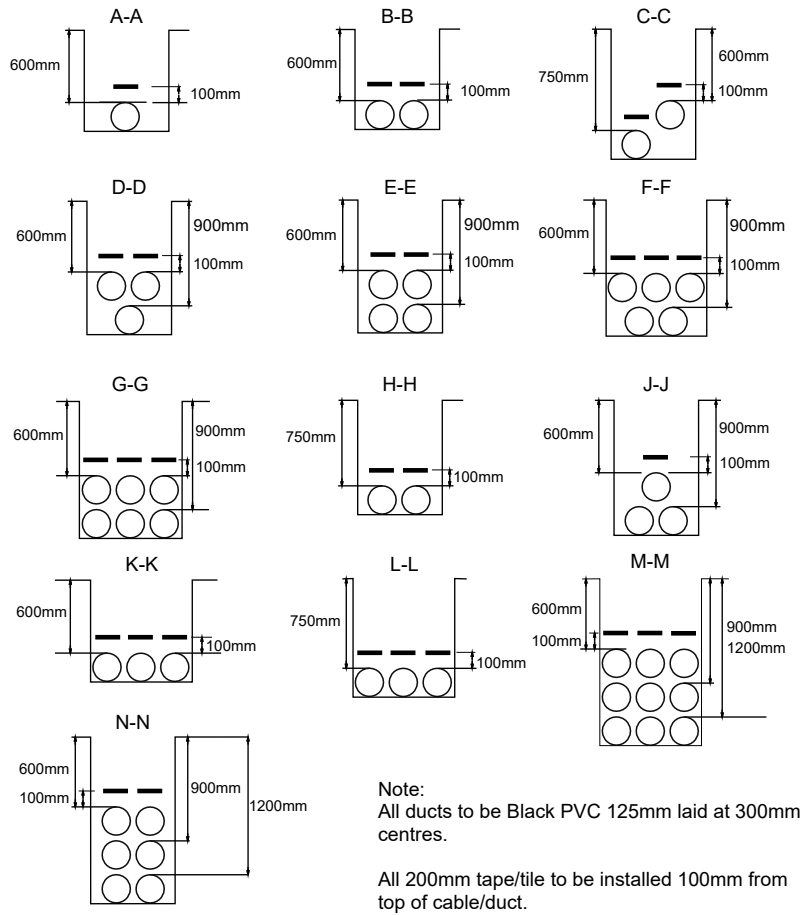


Maps produced at 1:2500 scale are LV Geo-Schematics which show LV mains cables and overhead lines (in some cases all voltages). Prior to carrying out excavations you must refer to the 1:500 records to determine the location of all known underground plant and equipment.

Please be aware that electric lines belonging to other owners of licensed electricity distribution systems may be present and it is your responsibility to identify their location.

1. The position of the apparatus shown on this drawing is believed to be correct but the original landmarks may have been altered since the apparatus was installed.
2. The exact position of the apparatus should be verified - use approved cable avoidance tools prior to excavation using suitable hand tools.
3. It is essential that trial holes are carefully made avoiding the use of mechanical tools or picks until the exact location of all cables have been determined.
4. It must be assumed that there is a service cable into each property, lamp column and street sign, etc.
5. All cables must be treated as being live unless proved otherwise by UK Power Networks.
6. The information provided must be given to all people working near UK Power Networks' plant & equipment. Do not use plans more than 3 months after the issue date for excavation purposes.
7. Please be aware that electric cables/lines belonging to other owners of licensed electricity distribution systems may be present and it is your responsibility to identify their location.

PRIMARY CABLES
EXTRA HIGH VOLTAGE CABLES (EHV) 22,000 TO 132,000 Volts
Depth normally 750mm cover in carriageway & 600mm cover in footway.
Before digging within one metre of these cable routes Telephone 0800 056 5866 in order that the Company's apparatus may be located on site and any necessary protection works agreed.
N.B. THRUST BORERS OR MOLES MUST NOT BE USED WITHIN THE VICINITY OF ANY CABLES BELONGING TO UK POWER NETWORKS WITHOUT FIRST CONTACTING THIS COMPANY.

- ADVICE TO CONTRACTORS ON AVOIDING DANGER FROM BURIED ELECTRICITY CABLES.
- 1) Do have cable drawings with you on site and check them before you start the excavation.
 - 2) Do have a cable locator tool on site and use it to help you.
 - 3) Mark out the location of electricity cables.
 - 4) Do not use a mechanical excavator within 0.5m of electricity cables.
 - 5) Use spades and shovels in preference to other tools.
 - 6) Never disturb electricity cables and joints or their protective covers.
- IF IN DOUBT - ASK! PHONE 0800 056 5866
EMERGENCY - If you damage a cable or line Phone 105 (24hrs) URGENTLY
These basic safety precautions are explained in detail in the HSE booklet, HS(G)47 - Avoiding Danger from Underground Services, a copy of which may be obtained from your supervisor or HMSO.



Proposals For : 8500295534 Proposed CAF Plan
(NTR) Land next to Red Brick Cottage, The Street, Kelshall, Royston SG8 9SQ
Plotted On: 21/06/2024
Plotted By: Gabriel McCullogh
Scale 1:500 (when plotted at A2)
Map Centre : TL3336SW

Reproduced by permission of Ordnance Survey on behalf of HMSO. (c) Crown copyright and database right 2024. All rights reserved. Ordnance Survey Licence number AC0000850812. Data has been added to the Ordnance Survey base map; all proprietary rights in such additional data are and shall remain the exclusive property of (c) Eastern Power Networks plc or London Power Networks plc each being a distribution licensee under section 61(1)(c) of the Electricity Act 1989 for the relevant distribution services area as that term is defined in such licensee's distribution licence. All rights in such data reserved.