

1/101 Proposed - South West Elevation

1 : 100 @A3

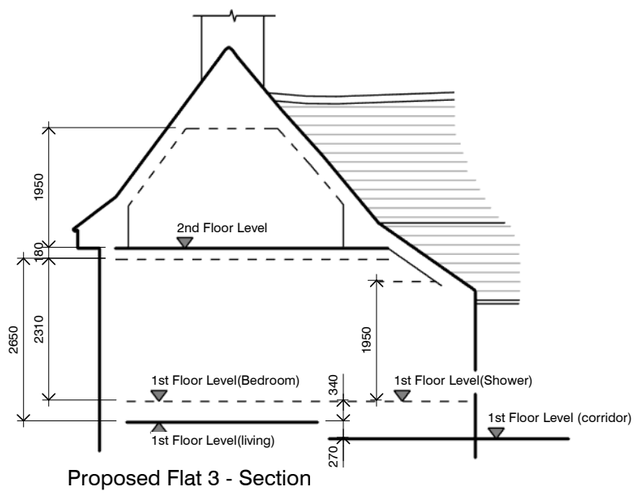

Proposed Flat 3 - Section

Window Schedule (new)		
Window no.	existing	proposed work
w12	Metal - 4 pane casement with vent	Replace - TBC, part of commercial plan
w17	Metal - single obscure	Replace - Timber single double glazed unit with bar
w18	-	-
w19	Timber 6 pane sash	Replace - Timber d/g sash with georgian bar
w20	-	-
w21	-	-
w22	Glazed door	Replace door - Timber d/g sash with georgian bar
w23	Timber Double plain casement	Replace - Timber d/g sash with georgian bar
w24	Timber Double casement with vent	-
w30	Metal 8 panel casement with vent	Replace - Timber d/g sash with georgian bar
w31	Timber sliding sash	-
w35	Timber casement	Replace - Timber single double glazed unit with bar
w36	na	New - Timber d/g sash with georgian bar
w37	na	New - Timber d/g sash with georgian bar

ALL Windows to recieve Secondary Glazing units- Selectaglaze Slimline 20 (VS)
Thermal:
Selectaglaze Slimline 20 (VS), 6.8mm low-E - (U-Value) **1.80 W/m2K**
Acoustic:
Assumed 3mm existing glass throughout. 6.8mm low-E - 100mm cavity **44 dB (Rw)**

PicklePlanning
1 Sale Drive-Baldock-SG7 6NS
07843238113 - pickleplanning@gmail.com
www.pickleplanning.co.uk

Name
Essential Water

Address:
Rose & Crown, 8 Whitehorse Street, Baldock, SG7 6QN

Title
Proposed Elevations

Dwg no.	Rev:
EW-1705 -210	E

Status	Scale	Date
Prelim	As indicated@A3	03/26/17

Revisions

Rev	Description	Date
-	ISSUED FOR INFORMATION	13.03.17
A	ISSUED FOR PRE-APP	16.05.17
B	ISSUED FOR PLANNING	05.01.18
C	Conservation Officer Comments	30.05.18
D	Environmental Health Comments	16.08.18
E	GLAZING DETAILS AMENDED	10.09.18

The content of this drawing is the property of PicklePlanning and may not be copied in whole or part without formal consent.