
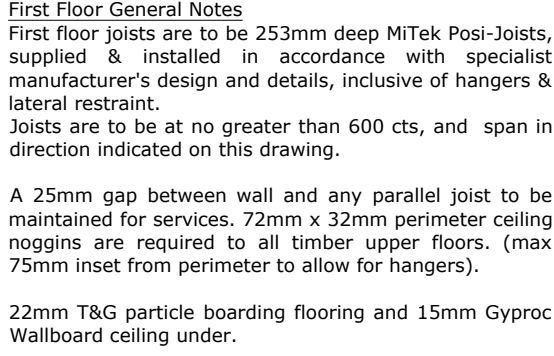
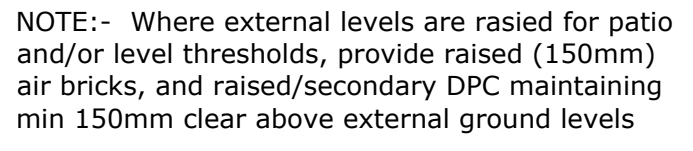





Wall Hatch Key

	100mm facing brick external leaf
	100mm Duxos Supabloc
	100mm Hemelitte standard, light weight aggregate block (Density 1360-1520kg/m³)
	Kingspan TW50 partial fill cavity insulation
	Isover RD Party Wall Roll acoustic insulation
	Partition wall 63mm x 38mm studs at 600mm cts 400mm cts where walls are tiled) with head & sole plates and finished either side with 12.5mm Gyproc Wallboard
	Partition wall as above with 75mm Isover 'APR 1200' glass mineral wool roll between studs
	Shading of wall indicated 18mm plywood fitted from 300-1500mm above FFL between studs, to allow for fitting of future grab rails, seats adaptations etc.
Notes:- See each floor plan for block widths and strengths	